

BERWICK BANK WIND FARM OFFSHORE ENVIRONMENTAL IMPACT ASSESSMENT

APPENDIX 13.1: NAVIGATIONAL RISK ASSESSMENT



Berwick Bank Wind Farm Navigational Risk Assessment

Prepared by Anatec Limited
Presented to Berwick Bank Project
Revision Number Final
Document Reference A4495-BB-NRA-01

	Aberdeen Office	Cambridge Office
Address	10 Exchange Street, Aberdeen, AB11 6PH, UK	Braemoor, No. 4 The Warren, Witchford Ely, Cambs, CB6 2HN, UK
Tel	01224 253700	01353 661200
Email	aberdeen@anatec.com	cambs@anatec.com

Project A4495
Client Berwick Bank Project
Title Berwick Bank Wind Farm Navigational Risk Assessment



This study has been carried out by Anatec Ltd on behalf of the Berwick Bank Project. The assessment represents Anatec's best judgment based on the information available at the time of preparation. Any use which a third party makes of this report is the responsibility of such third party. Anatec accepts no responsibility for damages suffered as a result of decisions made or actions taken in reliance on information contained in this report. The content of this document should not be edited without approval from Anatec. All figures within this report are copyright Anatec unless otherwise stated. No reproduction of these images is allowed without written consent from Anatec.

Revision	Date	Summary of Change
FINAL	November	Final

Approval for Issue		
Ross Hodson	[Redacted]	4 th November 2022

Date 24.10.2022
Document Reference A4495-BB-NRA-01

Page i

Table of Contents

1 Introduction 1

1.1 Background 1

1.2 Navigational Risk Assessment 1

2 Guidance and Legislation..... 3

2.1 Legislation 3

2.2 Primary Guidance..... 3

2.3 Other Guidance 3

2.4 Lessons Learnt..... 4

3 Navigational Risk Assessment Methodology..... 5

3.1 Formal Safety Assessment Methodology 5

3.2 Formal Safety Assessment Process 5

3.3 Cumulative Risk Assessment Methodology..... 8

3.4 Study Areas 12

4 Consultation..... 13

4.1 Stakeholders Consulted in Navigational Risk Assessment Process 13

4.2 Consultation Responses 14

4.3 Hazard Workshops 43

5 Data Sources 45

5.1 Summary of Data Sources 45

5.2 Vessel Traffic Surveys..... 46

5.3 Long-Term Vessel Traffic Data 46

5.4 Data Limitations 47

6 Project Design Envelope Relevant to Shipping and Navigation 49

6.1 Proposed Development Boundaries..... 49

6.2 Surface Infrastructure 53

6.3 Subsea Infrastructure..... 55

6.4 Timescales..... 56

6.5 Vessel and Helicopter Numbers 56

6.6 Maximum Design Scenario..... 59

7 Navigational Features..... 71

7.1 Other Offshore Wind Farm Developments 71

7.2 Ports and Related Services 73

7.3 Aids to Navigation 74

7.4 Anchorage Locations 75

7.5 Military Practice and Exercise Areas 76

7.6 Charted Wrecks..... 77

7.7 Other Features 77

8 Meteorological Ocean Data 79

8.1 Wind 79

8.2 Wave 79

8.3 Visibility..... 80

8.4 Tide 80

9 Emergency Response 82

9.1 Search and Rescue Helicopters 82

9.2 Royal National Lifeboat Institution..... 84

9.3 Maritime Rescue Coordination Centres and Joint Rescue Coordination Centres..... 87

9.4 Global Maritime Distress and Safety System..... 88

9.5 Marine Accident Investigation Branch 89

9.6 Historical Offshore Wind Farm Incidents 91

10 Vessel Traffic Movements 99

10.1 Proposed Development Array Area..... 99

10.2 Proposed Development Export Cable Corridor 118

11 Base Case Vessel Routeing..... 134

11.1 Definition of a Main Commercial Route 134

11.2 Pre Wind Farm Main Commercial Routes 134

12 Adverse Weather Vessel Traffic Movements 137

12.1 Identification of Periods with Adverse Weather 137

12.2 Commercial Routeing Changes 137

12.3 Small Craft Use of Safe Havens 138

13 Navigation, Communication and Position Fixing Equipment 140

13.1 Very High Frequency Communications (Including Digital Selective Calling) 140

13.2 Very High Frequency Direction Finding 140

13.3 Automatic Identification System 141

13.4 Navigational Telex System 141

13.5 Global Positioning System..... 141

13.6 Electromagnetic Interference 142

13.7 EMF from Cables Associated with the Proposed Development 143

13.8 Marine Radar 145

13.9 Sound Navigation Ranging Systems 152

13.10 Noise 152

13.11 Summary of Risk 152

14 Cumulative and Transboundary Overview 153

14.1 Screened In Developments 153

14.2 Cumulative Pre-Wind Farm Routeing..... 158

15 Future Case Vessel Traffic.....	160
15.1 Increases in Commercial Vessel Activity.....	160
15.2 Increases in Commercial Fishing Vessel Activity.....	160
15.3 Increases in Recreational Vessel Activity.....	161
15.4 Increases in Traffic Associated with Project Operations	161
15.5 Commercial Traffic Routeing (Project in Isolation).....	161
15.6 Commercial Traffic Routeing (Cumulative)	164
16 Collision and Allision Risk Modelling	177
16.1 Overview.....	177
16.2 Pre Wind Farm Modelling	177
16.3 Post Wind Farm Modelling.....	180
16.4 Risk Results Summary	187
17 Embedded Mitigation Measures.....	189
17.1 Marine Aids to Navigation.....	190
17.2 Design Specifications Noted in Marine Guidance Note 654.....	192
18 Project in Isolation Risk Assessment	193
19 Cumulative Risk Assessment	207
19.1 Navigation Corridor Safety Case.....	207
19.2 Summary of Cumulative Risk Assessment.....	216
20 Through Life Safety Management.....	234
20.1 Quality, Health, Safety and Environment.....	234
20.2 Incident Reporting	234
20.3 Review of Documentation.....	234
20.4 Inspection of Resources	235
20.5 Audit Performance.....	235
20.6 Safety Management System	235
20.7 Cable Monitoring	235
20.8 Hydrographic Surveys	236
20.9 Decommissioning Plan	236
21 Summary.....	237
21.1 Consultation.....	237
21.2 Existing Environment	237
21.3 Future Case Vessel Traffic	238
21.4 Collision and Allision Risk Modelling	238
21.5 Risk Statement	238
22 References	240
Appendix A Marine Guidance Note 654 Checklist	243

Appendix B Hazard Log.....	257
Appendix C Consequences Assessment	282
C.1 Risk Evaluation Criteria	282
C.2 Marine Accident Investigation Branch Incident Analysis.....	285
C.3 Fatality Risk	292
C.4 Pollution Risk	298
C.5 Conclusion.....	301
Appendix D Regular Operator Consultation	302
Appendix E Long-Term Vessel Traffic Movements	306
E.1 Introduction	306
E.2 Methodology.....	307
E.3 Long-Term Vessel Traffic Movements	308
E.4 Site Specific Analysis	319
E.5 Survey Data Comparison	321
E.6 Conclusion.....	322
Appendix F Summer 2020 Vessel Traffic Data.....	323
F.1 Vessel Count	323
F.2 Vessel Type	324
F.3 Site Specific Analysis	330
F.4 Survey Data Comparison	331
F.5 Conclusion.....	332

Table of Figures

Figure 3.1	Flow Chart of the FSA Methodology (IMO, 2018).....	6
Figure 3.2	Overview of Shipping and Navigation Study Areas	12
Figure 6.1	Proposed Development Array Area Coordinates.....	49
Figure 6.2	Refinement of the Proposed Development Array Area	50
Figure 6.3	Proposed Development Export Cable Corridor Key Coordinates.....	52
Figure 6.4	Overview of Indicative Worst Case Array Layout for Shipping and Navigation	53
Figure 7.1	General Overview of Navigational Features in Proximity to the Proposed Development.....	71
Figure 7.2	Offshore Wind Farm Developments in Proximity to the Proposed Development	72
Figure 7.3	Ports and Harbours in Proximity to the Proposed Development.....	73
Figure 7.4	Vessel Arrivals to Commercial Ports in Proximity to the Proposed Development	74
Figure 7.5	Aids to Navigation in Proximity to the Proposed Development	75
Figure 7.6	MoD Practice Areas in Proximity to the Proposed Development (Marine Scotland, 2019).....	76

Figure 7.7	Wrecks and Obstructions in Proximity to the Proposed Development.....	77
Figure 8.1	Wind Direction Distribution for Proposed Development.....	79
Figure 9.1	DfT SAR Helicopter Taskings Data within Proposed Development Array Area Shipping and Navigation Study Area by Type (2015 to 2021)	83
Figure 9.2	DfT SAR Helicopter Taskings Data within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Type (2015 to 2021)	84
Figure 9.3	RNLI Incident Data within Proposed Development Array Area Shipping and Navigation and Export Cable Corridor Study Areas by Incident Type (2010 to 2019)	85
Figure 9.4	RNLI Incident Data within Proposed Development Array Area Shipping and Navigation and Export Cable Corridor Study Areas by Casualty Type (2010 to 2019)	86
Figure 9.5	GMDSS Sea Areas (MCA, 2021)	88
Figure 9.6	MAIB Incident Data within Proposed Development Array Area Shipping and Navigation and Export Cable Corridor Study Areas by Incident Type (2010 to 2019)	89
Figure 9.7	MAIB Incident Data within Proposed Development Array Area Shipping and Navigation and Export Cable Corridor Study Areas by Vessel Type (2010 to 2019)	90
Figure 10.1	Vessel Traffic Movements within Proposed Development Array Area Shipping and Navigation Study Area by Vessel Type (14 Days Summer 2022)	99
Figure 10.2	Vessel Traffic Movements within Proposed Development Array Area Shipping and Navigation Study Area by Vessel Type (14 Days Winter 2021)	100
Figure 10.3	Vessel Density Heat Map within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2022)	101
Figure 10.4	Vessel Density Heat Map within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Winter 2021).....	101
Figure 10.5	Unique Vessels per Day within the Proposed Development Array Area and Shipping and Navigation Study Area (14 Days Summer 2022).....	102
Figure 10.6	Unique Vessels per Day within Proposed Development Array Area and Shipping and Navigation Study Area (14 Days Winter 2021)	103
Figure 10.7	Vessel Type Distribution within Proposed Development Array Area and Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	104
Figure 10.8	Cargo Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2022)	105
Figure 10.9	Cargo Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Winter 2021)	105
Figure 10.10	Tanker Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2022)	106
Figure 10.11	Tanker Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Winter 2021)	107

Figure 10.12	Commercial Fishing Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	108
Figure 10.13	VMS Fishing Vessel Density (July 2018 – June 2021)	109
Figure 10.14	Oil and Gas Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021).....	110
Figure 10.15	Recreational Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021).....	111
Figure 10.16	RYA Coastal Atlas Heat Map in Proximity to Proposed Development	112
Figure 10.17	RYA Coastal Atlas Features in Proximity to Proposed Development	113
Figure 10.18	Passenger Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2022)	114
Figure 10.19	Vessel Traffic Movements within Proposed Development Array Area Shipping and Navigation Study Area by Vessel LOA (28 Days Summer 2022 and Winter 2021)	115
Figure 10.20	Vessel LOA Distribution within Proposed Development Array Area and Shipping and Navigation Study Area (28-Days Summer 2022 and Winter 2021)	116
Figure 10.21	Vessel Traffic Movements within Proposed Development Array Area Shipping and Navigation Study Area by Vessel Draught (28 Days Summer 2022 and Winter 2021)	117
Figure 10.22	Vessel Draught Distribution within Proposed Development Array Area and Shipping and Navigation Study Area (28-Days Summer 2022 and Winter 2021)	117
Figure 10.23	Vessel Traffic Movements within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Vessel Type (14 Days Summer 2022)	119
Figure 10.24	Vessel Traffic Movements within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Vessel Type (14 Days Winter 2021).	119
Figure 10.25	Vessel Density Heat Map within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (14 Days Summer 2022)	120
Figure 10.26	Vessel Density Heat Map within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (14 Days Winter 2021)	120
Figure 10.27	Unique Vessels per Day within the Proposed Development Export Cable Corridor Area and Shipping and Navigation Area (14 Days Summer 2022) ...	121
Figure 10.28	Unique Vessels per Day within the Proposed Development Export Cable Corridor Area and Shipping and Navigation Study Area (14 Days Winter 2021)	122
Figure 10.29	Vessel Type Distribution within Proposed Development Export Cable Corridor Area and Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	123
Figure 10.30	Tanker Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021).....	124

Figure 10.31	Commercial Fishing Vessel Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	125
Figure 10.32	VMS Fishing Density within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (July 2018 – June 2021).....	126
Figure 10.33	Cargo Vessel Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	127
Figure 10.34	Recreational Vessel Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	128
Figure 10.35	Oil and Gas Vessel Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	129
Figure 10.36	Vessel Traffic Movements within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Vessel LOA (28 Days Summer 2022 and Winter 2021)	130
Figure 10.37	Vessel LOA Distribution within Proposed Development Export Cable Corridor and Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	131
Figure 10.38	Vessel Traffic Movements within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Vessel Draught (28 Days Summer 2022 and Winter 2021)	132
Figure 10.39	Vessel Draught Distribution within Berwick Bank Export Cable Corridor and Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)	132
Figure 11.1	Illustration of Main Route Calculation (MCA, 2021)	134
Figure 11.2	Main Commercial Routes and 90 th Percentiles within Proposed Development Array Area Shipping and Navigation Study Area (Pre Wind Farm).....	135
Figure 12.1	Indicative Small Craft Navigating within Wind Farm Array	139
Figure 13.1	Illustration of Side Lobes on Radar Screen	145
Figure 13.2	Illustration of Multiple Reflected Echoes on Radar Screen.....	146
Figure 13.3	Illustration of Potential Radar Interference at Greater Gabbard and Galloper Offshore Wind Farms	149
Figure 13.4	Illustration of Potential Radar Interference at the Proposed Development and Cumulative Offshore Wind Farm Developments	151
Figure 14.1	Offshore Wind Farms Developments Screened into Cumulative Risk Assessment.....	154
Figure 14.2	Offshore Wind Farms Developments Screened into Cumulative Risk Assessment with Main Commercial Routes (Pre Wind Farm).....	158
Figure 15.1	Anticipated Main Commercial Routes within Proposed Development Array Area Study Area (Post Wind Farm)	162
Figure 15.2	Examples of Pre Wind Farm Main Commercial Routes Between Forth Ports and Northern Ports	165

Figure 15.3	Cumulative Options for Main Commercial Routes Between Forth Ports and Northern Ports Passing North of NnG	166
Figure 15.4	Cumulative Options for Main Commercial Routes Between Forth Ports and Northern Ports Passing South of NnG.....	167
Figure 15.5	Examples of Pre Wind Farm Main Commercial Routes Between Forth Ports and Eastern Ports	169
Figure 15.6	Cumulative Options for Main Commercial Routes Between Forth Ports and Eastern Ports	170
Figure 15.7	Examples of Pre Wind Farm Main Commercial Routes Between Forth Ports and Southern Ports.....	171
Figure 15.8	Examples of Pre Wind Farm Main Commercial Routes North-South Following UK East Coast.....	172
Figure 15.9	Cumulative Options for Main Commercial Routes North-South Following UK East Coast	173
Figure 15.10	Example of Pre Wind Farm Main Commercial Route Between Dundee and Eastern Ports	175
Figure 15.11	Cumulative Options for Main Commercial Routes Between Dundee and Eastern Ports	176
Figure 16.1	Vessel Encounters Heat Map within the Proposed Development Array Area Study Area (28 Days, August 2022 and January 2021).....	178
Figure 16.2	Vessel Encounters per Day within the Proposed Development Array Area Study Area (28 Days, July 2020 & January 2021)	179
Figure 16.3	Pre Wind Farm Vessel to Vessel Collision Risk Heat Map within the Proposed Development Array Area Study Area.....	180
Figure 16.4	Post Wind Farm Simulated Base Case AIS Tracks within the Proposed Development Array Area Study Area (28 Days)	181
Figure 16.5	Post Wind Farm Vessel to Vessel Collision Risk Heat Map within the Proposed Development Array Area Study Area.....	182
Figure 16.6	Change in Vessel to Vessel Collision Risk within the Proposed Development Array Area Study Area	183
Figure 16.7	Base Case Powered Allision Risk per Structure.....	184
Figure 16.8	Base Case Drifting Allision Risk per Structure	185
Figure 16.9	Base Case Fishing Vessel Allision Risk per Structure	187
Figure 19.1	Overview of Gap Between Proposed Development Array Area and Inch Cape	207
Figure 19.2	Sea Space Required for a Full Round Turn to Starboard (PIANC, 2018).....	209
Figure 19.3	Application of PIANC Guidance to Navigation Corridor Between Proposed Development Array Area and Inch Cape.....	210

Table of Tables

Table 3.1	Severity of Consequence Ranking Definitions	6
Table 3.2	Frequency of Occurrence Ranking Definitions.....	7

Table 3.3 Tolerability Matrix and Risk Rankings 8
Table 3.4 Cumulative Risk Assessment Development Screening Scenarios 10
Table 4.1 Summary of Key Points Raised During Consultation..... 15
Table 5.1 Data Sources Used to Inform Shipping and Navigation Baseline 45
Table 6.1 Coordinates for the Proposed Development Array Area 50
Table 6.2 Key Coordinates for the Proposed Development Export Cable Corridor 52
Table 6.3 Wind Turbines MDS for Shipping and Navigation..... 54
Table 6.4 Maximum Vessel Numbers per Vessel Type for Construction Phase..... 56
Table 6.5 Maximum Vessel Numbers per Vessel Type for Operation and Maintenance Phase 58
Table 6.6 MDS by Hazard for Shipping and Navigation 60
Table 8.1 Sea State Distribution for Proposed Development 80
Table 8.2 Peak Flood and Ebb Tidal Data in Proximity to Proposed Development..... 80
Table 9.1 Summary of Historical Collision and Allision Incidents Involving UK Offshore Wind Farm Developments 93
Table 9.2 Historical Incidents Responded to by Vessels Associated with UK Offshore Wind Farm Developments 97
Table 11.1 Description of Main Commercial Routes 135
Table 12.1 Key Weather Events During 2019 Relevant to the Proposed Development (Met Office)..... 137
Table 13.1 EMF Mitigation 143
Table 13.2 Distances at which Risks for Marine Radar Occur..... 147
Table 13.3 Summary of Risk on Navigation, Communication, and Position-fixing Equipment 152
Table 14.1 Cumulative Screening 156
Table 14.2 Anticipated Cumulative Routeing Interaction with Cumulative Developments 159
Table 15.1 Summary of Post Wind Farm Main Commercial Route Deviations within Study Area 163
Table 16.1 Summary of Annual Collision and Allision Risk Results 188
Table 17.1 Embedded Mitigation Measures Relevant to Shipping and Navigation 189
Table 18.1 Summary of Outputs of Risk Assessment 194
Table 19.1 Summary of Navigation Corridor Width Calculations 215
Table 19.2 Summary of Outputs of Cumulative Risk Assessment 217

1 Introduction

1.1 Background

Anatec was commissioned by SSE Renewables Developments (UK) Limited (“SSE Renewables” (SSER)) to undertake a Navigational Risk Assessment (NRA) for the proposed Berwick Bank Wind Farm (hereafter the ‘Project’). The NRA has been undertaken with respect to the offshore components of the Project (hereafter, the ‘Proposed Development’) comprising the Proposed Development array area and the Proposed Development export cable corridor. This NRA presents information on the Proposed Development relative to the existing and estimated future navigational activity and forms an annex to **volume 2, chapter 13** of the offshore Environmental Impact Assessment (EIA) Report.

1.2 Navigational Risk Assessment

Environmental Impact Assessment is a process which identifies the environmental effects of a project, both adverse and beneficial. An important requirement of the EIA for offshore projects is the NRA. Following the Maritime and Coastguard Agency’s (MCA) Marine Guidance Note (MGN) 654 (MCA, 2021), this NRA includes:

- Outline of methodology applied in the NRA including relevant guidance;
- Summary of consultation undertaken with shipping and navigation stakeholders;
- Lessons learnt from previous offshore wind farm developments;
- Summary of Project Design Envelope (PDE) relevant to shipping and navigation;
- Overview of existing environment including:
 - Navigational features;
 - Meteorological and oceanographic conditions;
 - Emergency response resources;
 - Historical maritime incidents; and
 - Vessel traffic movements.
- Implications for marine navigation and communication equipment;
- Cumulative and transboundary overview;
- Overview of anticipated future case vessel traffic;
- Assessment of navigational risk pre and post construction of the Proposed Development including collision and allision risk modelling;
- Hazard identification for further assessment in **volume 2, chapter 13**;
- Identification of embedded mitigation measures; and
- Completion of the MGN 654 Checklist (see Appendix A).

Potential hazards have been considered for each phase of the Proposed Development as follows:

- Construction;
- Operation and maintenance; and
- Decommissioning.

The assessment of the Proposed Development is based on a PDE, an approach which is standard practice for offshore wind farm developments given the potential for findings from further site investigations (to be undertaken post consent) and advancements in technology. The PDE includes conservative assumptions to form a maximum design scenario which is considered and assessed for all hazards on the basis that any deviation from the maximum design scenario (but still within the parameters of the PDE) will result in the risk of any relevant hazards being no greater than that assessed using the maximum design scenario. Further details on the PDE are provided in section 6.

2 Guidance and Legislation

2.1 Legislation

As part of the EIA Directive (2011/92/European Union (EU), as amended by Directive 2014/52/EU) (which remains applicable following EU Exit), an EIA Report is required to support the application for the Section 36 consent for the Project. The MCA require that, as part of the EIA Report, an NRA is undertaken to “*inform the shipping and navigation chapter of the EIA Report*” (MCA, 2021).

2.2 Primary Guidance

The primary guidance documents used during the assessment are the following:

- *MGN 654 (Merchant and Fishing) Safety of Navigation: Offshore Renewable Energy Installations (OREIs) – Guidance on UK Navigational Practice, Safety and Emergency Response* and its annexes (MCA, 2021); and
- *Revised Guidelines for FSA for Use in the Rule-Making Process* (International Maritime Organization (IMO), 2018).

MGN 654 highlights issues that shall be considered when assessing the potential effect on navigational safety from offshore renewable energy developments proposed in United Kingdom (UK) internal waters, territorial sea or Renewable Energy Zones (REZ).

MGN 654 includes several annexes including the *Methodology for Assessing the Marine Navigational Safety & Emergency Response Risks of Offshore Renewable Energy Installations (OREI)* which the MCA require to be used as a template for preparing NRAs. The methodology is centred on risk management and requires a submission that shows that sufficient controls are, or will be, in place for the assessed risk to be judged as broadly acceptable or tolerable with mitigation (see section 3.2). In both **volume 2, chapter 13** and the NRA, the base and future case levels of risk have been identified as well as the mitigation measures required to ensure the future case remains broadly acceptable, or tolerable with mitigation.

2.3 Other Guidance

Other guidance documents used during the assessment include:

- *MGN 372 (Merchant and Fishing) Offshore Renewable Energy Installations (OREI): Guidance to Mariners Operating in the Vicinity of UK OREIs* (MCA, 2008);
- *International Association of Marine Aids to Navigation and Lighthouse Authorities (IALA) Recommendation O-139 on The Marking of Man-Made Offshore Structures* (IALA, 2021 (a));
- *IALA Guidance G1162 The Marking of Offshore Man-Made Structures* (IALA, 2021 (b)); and

- *The Royal Yachting Association's (RYA) Position on Offshore Renewable Energy Developments: Paper 1 (of 4) – Wind Energy* (RYA, 2019).

2.4 Lessons Learnt

There is considerable benefit for the Applicant in the sharing of lessons learnt within the offshore industry. The NRA, and in particular the risk assessment undertaken in **volume 2, chapter 13**, includes general consideration for lessons learnt and expert opinion from previous offshore wind farm developments and other sea users, capitalising upon the UK's position as a leading generator of offshore wind power.

Data sources for lessons learnt include the following:

- *Sharing the Wind – Recreational Boating in the Offshore Wind Strategic Areas* (RYA and CA, 2004);
- *Results of the Electromagnetic Investigations* (MCA and QinetiQ, 2004);
- *Offshore Wind Farm Helicopter Search and Rescue Trials Undertaken at the North Hoyle Wind Farm* (MCA, 2005);
- *Interference to Radar Imagery from Offshore Wind Farms* (Port of London Authority (PLA), 2005);
- *Navigational Risk Assessment Phase 1 Offshore Wind Farms Project Alpha and Project Bravo* (Anatec, 2012);
- *Regional Cumulative Shipping and Navigational Review – Outer Firth of Forth and Tay Wind Farm Developments* (Anatec, 2012);
- *Strategic Assessment of Impacts on Navigation of Shipping and Related Effects on Other Marine Activities Arising from the Development of Offshore Wind Farms in the UK Renewable Energy Zone (REZ)* (Anatec and The Crown Estate (TCE), 2012);
- *Offshore Wind and Marine Energy Health and Safety Guidelines* (RenewableUK, 2014);
- *Influence of UK Offshore Wind Farm Installation on Commercial Vessel Navigation: A Review of Evidence* (Anatec, 2016);
- *Navigational Risk Assessment Addendum (Appendix 12A)* (Anatec, 2018); and
- *G+ Global Offshore Wind Health & Safety Organisation 2020 Incident Data Report* (G+, 2021).

3 Navigational Risk Assessment Methodology

3.1 Formal Safety Assessment Methodology

A shipping and navigation user can only be affected by a hazard if there is a pathway through which a hazard can be transmitted between the source activity (cause) and the user. In cases where a user is exposed to a hazard, the overall severity of consequence to the user is determined. This process incorporates a degree of subjectivity. The assessments presented herein for shipping and navigation users have considered the following criteria:

- Baseline data and assessment;
- Expert opinion;
- Outputs of the Hazard Workshop;
- Level of stakeholder concern;
- Time and/or distance of any deviation;
- Number of transits of specific vessel and/or vessel type; and
- Lessons learnt from existing offshore developments.

With regards to commercial fishing vessels, the methodology and assessment considers hazards to commercial fishing vessels in transit. A separate methodology and assessment have been applied in **volume 2, chapter 12** to consider hazards to commercial fishing vessels related to commercial fishing activity (rather than commercial fishing vessels in transit).

3.2 Formal Safety Assessment Process

The IMO Formal Safety Assessment (FSA) process (IMO, 2018) (the FSA process) as approved by the IMO in 2018 under Maritime Safety Committee (MSC) – Marine Environment Protection Committee (MEPC).2/circ. 12/Rev.2 has been applied to the risk assessment in **volume 2, chapter 13** and is considered in this NRA.

The FSA process is a structured and systematic methodology based upon risk analysis and Cost Benefit Analysis (CBA) (if applicable) to reduce risks to As Low as Reasonably Practicable (ALARP). There are five basic steps within this process as illustrated in Figure 3.1 and summarised in the following list:

- **Step 1** – identification of hazards (a list is produced of hazards prioritised by risk level specific to the problem under review);
- **Step 2** – risk analysis (investigation of the causes and initiating events and consequences of the more important hazards identified in Step 1);
- **Step 3** – risk control options (identification of measures to control and reduce the identified hazards);
- **Step 4** – CBA (identification and comparison of the benefits and costs associated with the risk control options identified in Step 3); and
- **Step 5** – recommendations for decision-making (defining of recommendations based upon the outputs of Steps 1 to 4).



Figure 3.1 Flow Chart of the FSA Methodology (IMO, 2018)

3.2.1 Hazard Workshop Methodology

A key tool used when undertaking an NRA is the Hazard Workshop which ensures that all risks are identified and qualified in agreement with relevant consultees prior to assessment within the Offshore EIA Report. Risks (and the determined qualification) are recorded via the hazard log which is presented in full in Appendix B.

Table 3.1 and Table 3.2 identify how the severity of consequence and the frequency of occurrence has been defined within the hazard log, respectively.

Table 3.1 Severity of Consequence Ranking Definitions

Rank	Description	Definition			
		People	Property	Environment	Business
1	Negligible	No perceptible risk	No perceptible risk	No perceptible risk	No perceptible risk
2	Minor	Slight injury(ies)	Minor damage to property (i.e. superficial damage)	Tier 1 local assistance required	Minor reputational risks – limited to users
3	Moderate	Multiple minor or single serious injury	Damage not critical to operations	Tier 2 limited external assistance required	Local reputational risks

Rank	Description	Definition			
		People	Property	Environment	Business
4	Serious	Multiple serious injuries or single fatality	Damage resulting in critical risk to operations	Tier 2 regional assistance required	National reputational risks
5	Major	More than one fatality	Total loss of property	Tier 3 national assistance required	International reputational risks

Table 3.2 Frequency of Occurrence Ranking Definitions

Rank	Description	Definition
1	Negligible	Less than 1 occurrence per 10,000 years
2	Extremely unlikely	1 per 100 to 10,000 years
3	Remote	1 per 10 to 100 years
4	Reasonably probable	1 per 1 to 10 years
5	Frequent	Yearly

An aggregate of the severity of consequence (Table 3.1) and frequency of occurrence (Table 3.2) provide the level of risk for each hazard; the method for undertaking this aggregation is through use of a tolerability matrix, as presented in Table 3.3. The risk of a hazard is defined as Broadly Acceptable (low risk), Tolerable (intermediate risk), or Unacceptable (high risk).

Once identified, the risk of a hazard is assessed to ensure it is ALARP. Further risk control measures may be required to further mitigate a hazard in accordance with the ALARP principle. Unacceptable risks are not considered to be ALARP.

Outputs of the hazard log have been used as evidence to support and refine the assessment undertaken in **volume 2, chapter 13**.

Table 3.3 Tolerability Matrix and Risk Rankings

Severity of Consequence	5					
	4					
	3					
	2					
	1					
		1	2	3	4	5
		Frequency of occurrence				

	Unacceptable (high risk)
	Tolerable (intermediate risk)
	Broadly Acceptable (low risk)

3.3 Cumulative Risk Assessment Methodology

The hazards identified in the FSA are also assessed for cumulative risks with other projects and proposed developments within the cumulative risk assessment. Given the varying type, status and location of developments, different scenarios have been considered in the cumulative risk assessment, which allocates developments into the scenarios depending upon the following criterion:

- Development status;
- Distance from the Proposed Development;
- Level of interaction with baseline traffic relevant to the Proposed Development;
- Level of concern raised during consultation; and
- Data confidence.

The scenarios and associated level of assessment undertaken for each, are summarised in Table 3.4. Given the level of interest during consultation in the cumulative scenario, a detailed qualitative and quantitative (where applicable) approach to the cumulative risk assessment has been applied for each scenarios.

The maximum distance within which developments are considered for the cumulative risk assessment is 50 nm from the Proposed Development array area on the basis that there is not considered to be a direct pathway between the Proposed Development and any development beyond 50 nm from the Proposed Development array area. This distance is standard within NRAs and provides a good overview of cumulative traffic patterns.

An aggregate of the criterion can determine the relevant scenario(s) for each development. For example, if a development is located within 50 nm of the Proposed Development array area but does not impact a main commercial route passing within 1 nm of the Proposed

Development array area and has low data confidence it may still be screened out of the cumulative risk assessment.

For offshore wind farms and in the context of shipping and navigation, the term ‘under construction’ indicates that offshore construction was ongoing at the time of the baseline being established and a buoyed construction area is present. The term ‘pre-construction’ indicates that a development has been consented and has a Contract for Difference (CfD) secured. The term ‘consented’ indicates that a development has been consented but does not have a CfD secured.

Projects meeting the assessment criteria are detailed in section 14.1.

Table 3.4 Cumulative Risk Assessment Development Screening Scenarios

Scenario	Development Status	Distance from the Proposed Development	Interaction with Baseline Traffic	Concern Raised in Consultation	Data Confidence	Level of Cumulative Risk Assessment
N/A	Operational or under construction	N/A	N/A	N/A	N/A	None – considered as part of the baseline assessment.
1	Pre-construction	Up to 10 nm from the Proposed Development array area or up to 2 nm from the Proposed Development export cable corridor.	May impact a main commercial route passing within 1 nm of the Proposed Development array area and/or interacts with traffic which may be directly displaced by the Proposed Development array area.	Raised as having a possible cumulative effect during consultation.	High or medium	Detailed qualitative and quantitative assessment of re-routing of main commercial vessels.
2	Consented	Between 10 and 25 nm from the Proposed Development array area.	May impact a main commercial route passing within 1 nm of the Proposed Development array area and/or interacts with traffic which may be directly displaced by the Proposed Development array area.	Raised as having a possible cumulative effect during consultation.	High or medium	Detailed qualitative and quantitative assessment of re-routing of main commercial vessels.
3	Under determination, scoped or not yet scoped	Between 25 and 50 nm from the Proposed Development array area.	Does not impact a main commercial route passing within 1 nm of the Proposed Development array area and does not interact with traffic which may be directly displaced by the Proposed Development array area.	No concerns raised relating to cumulative effects during consultation.	Medium or Low	High level qualitative assumptions of re-routing of main commercial vessels only.

Project A4495
Client Berwick Bank Project
Title Berwick Bank Wind Farm Navigational Risk Assessment

Scenario	Development Status	Distance from the Proposed Development	Interaction with Baseline Traffic	Concern Raised in Consultation	Data Confidence	Level of Cumulative Risk Assessment
4	Not yet scoped	More than 50 nm from the Proposed Development array area.	Does not impact a main commercial route passing within 1 nm of the Proposed Development array area and does not interact with traffic which may be directly displaced by the Proposed Development array area.	No concerns raised relating to cumulative effects during consultation.	Low	None – screened out of cumulative risk assessment.

3.4 Study Areas

3.4.1 Proposed Development Array Area

A 10 nm buffer has been applied around the Proposed Development array area (hereafter the 'Proposed Development array area shipping and navigation study area') as shown in Figure 3.2. This study area has been defined to provide local context to the analysis of risks by capturing the relevant routes and vessel traffic movements within, and in proximity to, the Proposed Development array area. A 10 nm study area has been used within the majority of UK offshore wind farm NRAs and is suitable for collection of radar data.

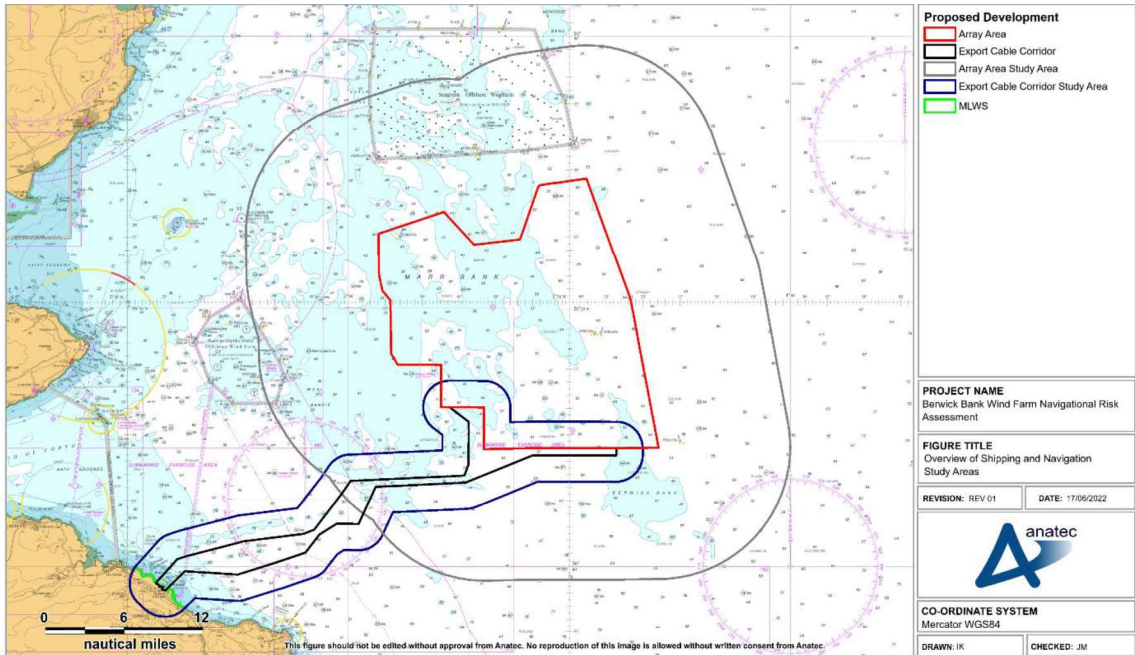


Figure 3.2 Overview of Shipping and Navigation Study Areas

3.4.2 Proposed Development Export Cable Corridor

A 2 nm buffer has been applied around the Proposed Development export cable corridor (hereafter the 'Proposed Development export cable corridor shipping and navigation study area') as shown in Figure 3.2. As with the Proposed Development array area shipping and navigation study area, this study area has been defined to capture relevant users and their movements within, and near, the Proposed Development export cable corridor. The Proposed Development export cable corridor shipping and navigation study area covers the area between the Mean Low Water Springs (MLWS) – marked on Figure 3.2 – and the boundary of the Proposed Development array area.

4 Consultation

4.1 Stakeholders Consulted in Navigational Risk Assessment Process

Key shipping and navigation stakeholders have been consulted in the NRA process. The following stakeholders have been consulted directly in meetings including the Hazard Workshops, noting that due to restrictions incurred by the COVID-19 pandemic, all meetings have been conducted via teleconferencing:

- MCA;
- Northern Lighthouse Board (NLB);
- UK Chamber of Shipping;
- RYA Scotland;
- Cruising Association (CA);
- Evergas;
- Fishermen's Mutual Association (FMA) including representation of Scottish Fishermen's Federation (SFF);
- Royal National Lifeboat Institution (RNLI);
- Forth Ports;
- Intrada;
- Regional Inshore Fisheries Group;
- Scottish Whitefish Producers Association;
- Fishing Industry Representatives (FIR) for 'Borders to Cove', 'Port Seton', and 'Montrose and Arbroath';
- INEOS; and
- Shell.

Additionally, the Forth Yacht Clubs Association, Royal Northumberland Yacht Club and Regular Operators have been consulted via email correspondence. The following stakeholders were also contacted but did not provide any feedback:

- Tay Yacht Clubs Association;
- Montrose Port Authority;
- Arbroath Harbour;
- Pittenweem Harbour;
- Eyemouth Harbour Trust;
- Dunbar Harbour Trust; and
- Aberdeen Harbour Board.

As well as consulting with the organisations outlined in section 4.1, 24 Regular Operators identified from the vessel traffic surveys and long-term vessel traffic data were provided with an overview of the Project and offered the opportunity to provide feedback. Specific questions were included to aid Regular Operators wishing to make a response, including in relation to changes in routeing, adverse weather routeing and the cumulative scenario. The Regular Operator letter is presented in full in Appendix C.

The full list of Regular Operators identified and subsequently contacted¹ is provided below:

- Amasus Shipping;
- Arklow Shipping;
- EemsWerken;
- Evergas;
- Fletcher Group;
- Fred. Olsen Cruise Lines;
- Harren-Partner;
- HAV Ship Management;
- Intrada Ship Management;
- James-Fisher;
- John T. Essberger;
- Maersk;
- MF Shipping Group;
- North Star Shipping;
- Peak Group;
- Solstad;
- Uni Tankers;
- Unigas;
- Universal Africa Lines;
- Vroon;
- Whitaker Tankers; and
- Wilson.

Evergas, HAV Ship Management, North Star Shipping and Intrada Ship Management provided feedback directly, as summarised in the relevant entries in Table 4.1.

4.2 Consultation Responses

Various responses have been received from stakeholders during consultation undertaken in the NRA process including during the Hazard Workshop, other consultation meetings, via email correspondence and through the Scoping Opinion for the 2020 Berwick Bank (Marine Scotland – Licensing Operations Team (MS-LOT), 2021)². The key points and where they have been addressed in the NRA or [volume 2, chapter 13](#) are summarised in Table 4.1.

¹ It is noted that contact was also sought for Princess Cruises and Viking Ocean Cruises but neither was able to be reached.
² The Project is an amalgamation of two previously proposed and separate offshore wind farms – Berwick Bank Wind Farm and Marr Bank Wind Farm, which were initially to be located next to each other in the Firth of Forth Zone. An Offshore EIA Scoping Report for the 2020 Berwick Bank was shared with stakeholders in August 2020 and a corresponding Scoping Opinion was received in March 2021. The amalgamated Berwick Bank Wind Farm is assessed in this NRA. A new Scoping Report was issued to MS-LOT in October 2021, but a Scoping Opinion has not been published by MS-LOT at the time of writing. The content of the Scoping Opinion for the 2020 Berwick Bank is considered relevant, but not directly applicable for the Proposed Development.

Table 4.1 Summary of Key Points Raised During Consultation

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
MCA	9 June 2020, consultation meeting on 2020 Berwick Bank	Content with use of a limited study area [7 nm to the west] for the analysis of vessel traffic in the Scoping Report on the basis that this will be increased to 10 nm for the NRA.	The Proposed Development array area shipping and navigation study area used in the NRA is a 10 nm buffer around the Proposed Development array area (see section 1.1, noting that this is considered standard and is independent of the change from 2020 Berwick Bank.
		If vessel traffic surveys are undertaken during COVID-19 restrictions then it is important to ensure the outputs remain representative of the true vessel traffic picture, with suitable arrangements required to accompany the surveys to meet the requirements of MGN 543 [now superseded by MGN 654] including consultation with local stakeholders and a review of historical data (2019).	Consultation with local stakeholders has been undertaken to assist in the baseline characterisation of vessel traffic movements (see section 4). Long-term vessel traffic data predating the COVID-19 pandemic has been used to validate the vessel traffic survey data (see section 10 and Appendix E), noting that this is independent of the change from 2020 Berwick Bank.
		The intention to undertake the summer vessel traffic survey during the school summer holidays due to this being the typical peak period for leisure craft and fishing vessels is considered a reasonable approach.	Noted in section 5.2 and is independent of the change from 2020 Berwick Bank.
		No preference for proposed approaches to vessel traffic surveys so long as the approach is reasonable, justified and follows a sound process, noting that recreational activity is not as prominent in this area as elsewhere in the UK.	Noted and the MCA were updated on the methodology for the vessel traffic surveys prior to their commencement (see 8 July 2020 entry). This is independent of the change from 2020 Berwick Bank.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		The Applicant should ensure compliance with MGN 543 [now superseded by MGN 654] guidance and completion of the MGN Checklist to ensure all points are addressed. Recent changes to the Search and Rescue (SAR) guidance and checklist are noted. Cable routes and burial depths as well as hydrographic survey data provision to the MCA and UKHO also requires consideration.	<p>The NRA has been undertaken in line with MGN 654 (see section 2.2).</p> <p>The MGN 654 Checklist has been completed (see Appendix A), noting that the requirement to do this is independent of the change from the 2020 Berwick Bank.</p>
NLB	10 June 2020, consultation meeting on the 2020 Berwick Bank	The obvious deviation for vessel traffic currently passing north-south through the location of the Proposed Development would be further offshore (to the east).	Anticipated main commercial route deviations and the methodology for their determination have been defined for the Proposed Development in isolation scenario (see section 15.5) and the cumulative scenario (see section 15.6), noting that the NLB's comment remains relevant for the change from the 2020 Berwick Bank.
		Construction buoyage for Neart na Gaoithe (NnG) Offshore Wind Farm was installed in May 2020.	Noted in section 7.1 and section 7.3 and remains relevant for the change from the 2020 Berwick Bank.
		Once all the Firth of Forth projects are constructed, vessels may choose to transit through the arrays.	<p>Internal and external studies undertaken by Anatec on behalf of the UK Government and individual clients demonstrates that commercial vessels do not transit through arrays (see section 15.5.1).</p> <p>This stance has been reiterated by Regular Operators during consultation for the Project (see 24 September 2021, 27 September 2021 and 1 October 2021 entries), noting that these responses are in relation to the current Berwick Bank Wind Farm (rather than the 2020 Berwick Bank).</p>

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Content with proposed approach to vessel traffic surveys provided the MCA are satisfied as the MCA take the lead on the survey methodology. A 2020 survey could record lower recreational and commercial vessels but this can be overcome with consultation. NLB's tender vessels are still working.	<p>Noted in section 5.2.</p> <p>The MCA confirmed they were content with the methodology for the vessel traffic surveys (see 8 July 2020 entry), noting that this is independent of the change from the 2020 Berwick Bank.</p> <p>Consultation has been undertaken with Regular Operators and recreational stakeholders to assist in the baseline characterisation of vessel traffic movements (see section 4), including in relation to the current Berwick Bank Wind Farm (rather than the 2020 Berwick Bank).</p>
		Agreed proposed list of potential risks and no additional risks suggested.	Noted, and the list presented was not affected by the change from the 2020 Berwick Bank.
		The main north-south route, used mostly by tankers, will have to move a negligible amount, to avoid all projects, compared to their overall transit length. There is an east-west route through the proposed Berwick Bank Wind Farm which may be of concern for Forth Ports.	Anticipated main commercial route deviations have been defined for the cumulative scenario and include north-south routeing (see section 15.6.5) and east-west routeing (section 15.6.3 and section 15.6.6), noting that the NLB comment remains relevant for the change from the 2020 Berwick Bank.
		For lighting and marking, construction at the southern extent of the Proposed Development array area is discouraged as this could be awkward to mark due to the exposed perimeter which could leave isolated structures.	An indicative array layout has been assessed which includes a full build out of the Proposed Development array area but minimises the presence of isolated structures (see section 6.2.1), noting that the current Berwick Bank Wind Farm has a less exposed perimeter than that considered by 2020 Berwick Bank.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Regarding use of AIS for marking, corner structures usually have AIS aids to navigation, but further discussions will be appropriate once layouts are under consideration.	Noted in section 17.1.2.2 and is independent of the change from the 2020 Berwick Bank.
Forth Ports	12 June 2020, consultation meeting on the 2020 Berwick Bank	The Port Vessel Traffic Service (VTS) system does not extend as far out as the Firth of Forth developments and Forth Ports do not advise traffic that far offshore.	Noted in section 7.2.1 and remains the case for current Berwick Bank Wind Farm.
		The relatively infrequent use of Braefoot as an AIS destination in the Scoping Report vessel traffic data may be due to tankers headed for Braefoot being located further inshore outside the Proposed Development array area study area.	Noted in section 11.2 and remains the case for current Berwick Bank Wind Farm.
		There are other ports within the region that are not members of Forth Ports including Fife (Pittenweem) and East Lothian (Eyemouth, Dunbar).	Pittenweem Harbour, Eyemouth Harbour Trust and Dunbar Harbour Trust were contacted as part of the consultation outreach for the current Berwick Bank Wind Farm (see section 4.1)
		Most vessels as far offshore as the Proposed Development array area are likely to be a considerable length and so be broadcasting on AIS but there may be some fishing vessels present that do not carry AIS. There is also potential that fishing vessels may turn off their AIS whilst fishing but Forth Ports do not handle fishing vessels in their remit.	The vessel traffic survey data incorporates AIS, radar and visual observations recorded by survey vessels located on-site (see section 5.2), noting that this comment remains relevant for the current Berwick Bank Wind Farm.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Commercial cargo activity has been largely unaffected by the COVID-19 pandemic but there are currently no cruise ship visits whereas normally there are 125 per year. Container traffic is lower, but these are likely coastal and do not transit further north. Tankers are at usual levels. Naval activity has been lower and is not expected to pick up again in 2020.	Long-term vessel traffic data predating the COVID-19 pandemic has been used to validate the vessel traffic survey data (see section 5.3 and Appendix E). The disparity in passenger vessel activity is reflected in the vessel traffic survey data and long-term vessel traffic data, with the latter used to characterise passenger vessel movements (see section 10.1.2.6), noting that this is independent of the change from the 2020 Berwick Bank.
		Content with the vessel traffic survey options outlined.	Noted in section 5.2 and is independent of the change from the 2020 Berwick Bank.
		There are no terminal/berth changes planned that may affect vessel traffic in the future with vessel numbers expected to remain fairly consistent. There are no ferry routes currently within the area or planned in the future.	Noted in section 10.1.2, section 10.2.2 and section 15.1 and remains relevant for the current Berwick Bank Wind Farm.
		There is some regular container traffic but there may be a cumulative effect on the Forth and Tay, especially for larger vessels which may have to enter from the south.	Anticipated main commercial route deviations have been defined for the cumulative scenario and routeing in/out of the Firth of Forth (section 15.6) and remains relevant for the current Berwick Bank Wind Farm. Access to local ports has been identified as a hazard to be fed into the FSA undertaken in volume 2, chapter 13 .
MCA	8 July 2020, email correspondence on the 2020 Berwick Bank	Content with the intended approach to vessel traffic surveys with no concerns to raise.	Noted in section 5.2 and is independent of the change from the 2020 Berwick Bank.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
MCA	9 March 2021, Scoping Opinion for the 2020 Berwick Bank	<p>The EIA Report should supply detail on the possible impact on navigational issues for both commercial and recreational craft, specifically:</p> <ul style="list-style-type: none"> Collision risk; Navigational safety; Visual intrusion and noise; Risk management and emergency response; Marking and lighting of site and information to mariners; Effect on small craft navigational and communication equipment; The risk to drifting recreational craft in adverse weather or tidal conditions; and The likely squeeze of small craft into the routes of larger commercial vessels. 	<p>Vessel to vessel collision risk (including interaction between small craft and larger commercial vessels), navigational safety, visual intrusion, noise, emergency response capability/access and drifting vessel to structure collision risk are assessed in volume 2, chapter 13 with input taken from the hazard log (see Appendix B), noting that this comment was repeated in the MCA's scoping response for the current Berwick Bank Wind Farm.</p>
		<p>The region carries a significant amount of through traffic with a number of shipping routes in close proximity. Attention needs to be paid to routeing, particularly in heavy weather ensuring shipping can continue to make safe passage without large-scale deviations.</p>	<p>Main commercial routes have been identified within and in proximity to the Proposed Development array area (see section 11.2) and anticipated deviations post wind farm have been determined (see section 15.5 and 15.6).</p> <p>Analysis of adverse weather routeing has been undertaken (see section 12.2) and assessed in volume 2, chapter 13, noting that this comment was repeated in the MCA's scoping response for the current Berwick Bank Wind Farm.</p>

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		<p>The likely cumulative and in combination effects on shipping routes should also be considered, taking into account the proximity to other offshore wind farm developments including Inch Cape, NnG and Seagreen, and the impact on navigable sea room. Additionally, the proximity to other offshore wind farms in close proximity will need to be fully considered, with an appropriate assessment of the distances between boundaries and shipping routes as per MGN 543 [now superseded by MGN 654].</p>	<p>A screening process has been undertaken to determine which other offshore wind farm developments should be considered cumulatively (including NnG, Seagreen and Inch Cape) (see section 14.1.1), noting that this comment was repeated in the MCA's scoping response for the current Berwick Bank Wind Farm.</p> <p>The proximity of the Proposed Development array area to Seagreen and Inch Cape has been assessed in the form of a navigational corridor safety case (see section 19.1).</p> <p>A cumulative risk assessment has been undertaken in volume 2, chapter 13 with the anticipated main commercial route deviations for the cumulative scenario (see section 15.6) used as input.</p>
		<p>We note that a relatively high density of traffic was observed in the western section of the Proposed Development array area shipping and navigation study area, with routeing occurring primarily within, and inshore, of the Proposed Development array area.</p>	<p>Main commercial routes have been identified within and in proximity to the Proposed Development array area including the average number of vessels per day using each route (see section 11.2) and this remains relevant for the current Berwick Bank Wind Farm.</p>

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		An NRA will need to be submitted in accordance with MGN 543 [now superseded by MGN 654] (and MGN 372) and the MCA Methodology and should be accompanied by a detailed MGN 543 [now superseded by MGN 654] Checklist. On this understanding, the MCA are likely to be content with the approach.	<p>This document is an NRA, noting that this comment was repeated in the MCA's scoping response for the current Berwick Bank Wind Farm.</p> <p>The NRA has been undertaken in line with MGN 654 and its annexes (see section 2.2).</p> <p>The MGN 654 Checklist has been completed (see Appendix A).</p>
		Given that the Proposed Development array area comes to a point in the southern section, assurance is required that during layout considerations it will be ensured that dangerously protruding or isolated structures are avoided.	<p>The Proposed Development array area has been refined from that considered in the Scoping Report for the 2020 Berwick Bank (RPS Energy, 2020) including to soften the point referred to in the south-east (see section 6.1.1).</p> <p>An indicative array layout has been assessed which minimises the presence of isolated structures (see section 6.2.1).</p>
		Attention should be paid to cabling routes and where appropriate burial depth for which a Burial Protection Index study should be completed and subject to the traffic volumes, an anchor penetration study may be necessary. If cable protection measures are required the MCA will accept a 5% reduction in surrounding water depths referenced to Chart Datum (CD).	<p>As per section 17:</p> <ul style="list-style-type: none"> A cable burial risk assessment will be undertaken post consent to determine suitable burial depths for cables. The Proposed Development will comply with MGN 654 (MCA, 2021) including in relation to under keel clearance requirements. <p>This comment was repeated in the MCA's scoping response for the current Berwick Bank Wind Farm.</p>

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Particular consideration will need to be given to the implications of the site size and location on SAR resources and Emergency Response Cooperation Plans (ERCoP).	<p>Emergency response resources and historical maritime incidents (see section 9) within and in proximity to the Proposed Development have been considered, noting that this comment was repeated in the MCA's scoping response for the current Berwick Bank Wind Farm.</p> <p>Emergency response capability/access is assessed in volume 2, chapter 13 with input taken from the hazard log (see Appendix B).</p> <p>An ERCoP will be completed post consent as required under MGN 654 (MCA, 2021) (there will be full MGN 654 compliance as per section 17).</p>
		Attention should be paid to the level of surveillance, AIS and shore-based Very High Frequency (VHF) radio coverage and give due consideration for appropriate mitigation such as radar, AIS receivers and in-field, marine bank VHF radio communications aerial(s) (VHF voice with Digital Selective Calling (DSC)) that can cover the entire wind farm sites and their surrounding areas. A SAR Checklist will also need to be completed in consultation with the MCA.	<p>Consideration has been given to the use of appropriate mitigation to assist safe navigation (see section 17.2), noting that this comment was repeated in the MCA's scoping response for the current Berwick Bank Wind Farm.</p> <p>A SAR Checklist will be completed post consent as required under MGN 654 (MCA, 2021) (there will be full MGN 654 compliance as per section 17).</p>
		Hydrographic surveys should fulfil the requirements of the International Hydrographic Organisation (IHO) Order 1a standard, with the final data supplied as a digital full density dataset, and survey report to the MCA Hydrography Manager.	Hydrographic surveys will be undertaken in line with MGN 654 requirements (see section 20.8), noting that this comment was repeated in the MCA's scoping response for the current Berwick Bank Wind Farm.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		The Applicant may wish to consult with the local RNLI coxswains in the area.	The RNLI were consulted including via the Hazard Workshops (see section 4.1) for the current Berwick Bank Wind Farm.
NLB	9 March 2021, Scoping Opinion for the 2020 Berwick Bank	It is of great importance that traffic patterns are monitored throughout the development of the other offshore wind farms consented in the Outer Firth of Forth, and that any changes to the patterns are noted.	The Navigation Safety Plan (NSP) will be undertaken post consent and include consideration of traffic patterns.
		Allowing for the likelihood of changing vessel traffic patterns, NLB wish to remain in frequent dialogue with the Applicant to ensure that the most appropriate lighting and marking scheme is provided.	Lighting and marking of the Proposed Development will be agreed in consultation with NLB once the final array layout has been selected post consent (see section 17.1), noting that this comment was repeated in NLB's response to the current Berwick Bank Wind Farm.
Forth Ports	9 March 2021, Scoping Opinion for the 2020 Berwick Bank	With the cumulative effect of the development of offshore wind farms in the approaches to the Forth Estuary, it is recommended that an NRA is undertaken on passing traffic, with particular regard to vessels carrying cargoes such as oil and gas and any effect on established safe shipping routes.	This document is an NRA, noting that this comment remains relevant for the current Berwick Bank Wind Farm. Anticipated main commercial route deviations have been defined for the cumulative scenario including consideration of the different vessel types present on each route (section 15.6).

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Consideration should also be given to how traffic in the vicinity of the developments is managed and whether there is a need for an offshore/coastal VTS to be established.	<p>The movement of vessels in proximity to the Proposed Development is assessed in volume 2, chapter 13, noting that this comment remains relevant for the current Berwick Bank Wind Farm.</p> <p>Embedded mitigation measures to manage vessel traffic include an application for Safety Zones, buoyed construction area, guard vessel(s), marine coordination and promulgation of information (see section 17).</p>
RYA Scotland	9 March 2021, Scoping Opinion for the 2020 Berwick Bank	Around 25% of cruising vessels in these waters transmit an AIS signal.	<p>All recreational vessels recorded throughout the vessel traffic surveys were recorded on AIS rather than radar (see section 1.1), noting that this is independent of the change from the 2020 Berwick Bank.</p> <p>Additional sources have been used to characterise recreational vessel movements including the RYA Coastal Atlas (see section 5.1) and consultation with recreational representatives (see section 4.1).</p>
		Notices to Mariners and Kingfisher are not effective ways of communicating with recreational sailors. There is now a large number of bodies issuing Notices to Mariners on the east coast sometimes only for short periods and it is unrealistic for skippers of recreational craft, which may have come from outside the UK, to track down all relevant Notices to Mariners.	<p>In addition to Notice to Mariners and Kingfisher the Proposed Development array area, any cable installation works and final offshore export cables will be lit, marked and charted as required by UKHO and NLB, noting this is independent of the change from the 2020 Berwick Bank.</p>

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		The North and East Coast Regional Inshore Fisheries Group should also be consulted.	Consultation with fisheries organisations has been undertaken primarily as part of volume 2, chapter 12 for the current Berwick Bank Wind Farm although a number of fisheries organisations have attended the Hazard Workshops (see section 4.3.1).
SFF	9 March 2021, Scoping Opinion for the 2020 Berwick Bank	Commercial fisheries operations are so different from shipping and navigation that the two should be assessed separately.	Noted, effects on active commercial fishing have been considered primarily as part of volume 2, chapter 12 although where relevant effects have been assessed at a high level in volume 2, chapter 13 for the current Berwick Bank Wind Farm.
UK Chamber of Shipping	9 March 2021, Scoping Opinion for the 2020 Berwick Bank	Do not support the limiting of the Proposed Development array area shipping and navigation study area to 7 nm in the western reaches without strong explanation or other compensatory measures to ensure the full impact on shipping and navigation is scoped in.	The Proposed Development array area shipping and navigation study area used in the NRA is a 10 nm buffer of the Proposed Development array area (see section 1.1), noting that this is considered standard and is independent of the change from the 2020 Berwick Bank.
		Recommend that Marine Accident Investigation Branch (MAIB) accident data be sought back further than 2008 to enhance safety and build as complete a picture as possible.	MAIB incident data between 2000 and 2019 has been considered in the characterisation of historical incidents within and in proximity to the Proposed Development, although the earlier 10-year period (2000 to 2009) has only been considered qualitatively given the changes to safety standards/regulations and poorer levels of reporting of incidents during that period (see section 9.5). This approach is independent of the change from the 2020 Berwick Bank.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Recognise and agree that summer 2020 data may not be representative of normal traffic levels due to COVID-19 and suggest caution and supplementary data from 2019 or future years is necessary.	A new summer vessel traffic survey was undertaken in August 2022 and has been used alongside the winter 2021 vessel traffic data as the primary dataset for charactering vessel traffic movements. Long-term vessel traffic data predating the COVID-19 pandemic has been used to validate the vessel traffic survey data (see section 5.3 and Appendix E), noting that this is independent of the change from the 2020 Berwick Bank.
		Encouraged that cumulative risks of other offshore wind developments are being taken into consideration, but would like more information about the regional shipping and navigation study and the area of study.	A methodology has been outlined for the cumulative risk assessment and includes details of the spatial extent considered for each project scenario (see section 3.3) in relation to the current Berwick Bank Wind Farm.
		Some concerns over the potential deviation required by east-west commercial traffic, but recognise that such issues will be fully dealt with during the NRA process.	Anticipated main commercial route deviations have been defined for the cumulative scenario and include east-west routeing (see section 15.6.6), noting that the UK Chamber of Shipping's comment remains relevant for the change in the Berwick Bank Wind Farm. The Proposed Development array area has been refined based on consultation feedback (see section 6.1.1.1).
MCA	28 April 2021, consultation meeting on the 2020 Berwick Bank	Content with vessel traffic survey data but note that future case assessment will be key.	Noted in section 5.2 and is independent of the change from the 2020 Berwick Bank. The future case level of activity has been considered (see section 15) and anticipated main commercial route deviations have been defined (see section 15.5 and 15.6).

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Consideration/assessment for floating foundations will need to include under keel clearance and mooring arrangements.	Floating foundations are not included in the PDE (see section 6.2.2) for the current Berwick Bank Wind Farm.
		The CA should be consulted.	The CA were consulted including via the Hazard Workshops (see section 4.3) for the current Berwick Bank Wind Farm.
		Any navigation corridors will need to be in accordance with MGN 543 [now superseded by MGN 654]. Local consultation with regular users and ports is key for any corridor assessment. If the NRA shows that future traffic will regularly use any gap then it would need to be defined as a corridor and meet MGN requirements.	A navigational corridor safety case has been undertaken for the gap between the Proposed Development array area and Inch Cape and includes consultation feedback (see section 19.1). This is based on the current Berwick Bank Wind Farm.
Forth Ports	24 August 2021, consultation meeting	No concerns with the proposed study areas or immediate concerns relating to the vessel traffic survey data.	Noted in section 15.1.
		Suggest INEOS's terminal within the Firth of Forth and the Braefoot terminal (shared by Shell and ExxonMobil) as possible consultees.	INEOS and Shell were consulted including via the Hazard Workshops (see section 4.3).
		Pilots would be unlikely to have an interest in the Project or the Hazard Workshop given that pilotage work is focused within the Firth of Forth.	Considered as part of the assessment of access to local ports in volume 2, chapter 13 .
		No specific considerations in relation to future case traffic volumes. Within the next five years any volume changes out of the Forth are likely to be decreases (including 5% annually out of Hound Point) but beyond five years is difficult to forecast. There is a lease area in Dundee for development, but this will be in relation to an offshore wind base.	Considered in section 15.1.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
NLB	10 September 2021, consultation meeting	Particular attention needs to be paid to the potential corridors between offshore wind farms that may be created.	A navigational corridor safety case has been undertaken for the gap between the Proposed Development array area and Seagreen and the gap between the Proposed Development array area and Inch Cape and includes consultation feedback (see section 19.1).
UK Chamber of Shipping	10 September 2021, consultation meeting	Given the large scale of the Proposed Development array area it may be worth considering whether any extension is required to the standard 10 nm buffer study area applied.	The 10 nm buffer has been defined to provide local context to the analysis of risks and is suitable for collection of radar data (see section 1.1).
		Queried whether any occasional traffic related to movement of jack-ups, semi-submersibles and other platforms was observed in the long-term vessel traffic data, noting that they are often towed and with restricted manoeuvrability.	Relevant operations are discussed in section 10.1.2.4.
		Ports as far as Dundee and Aberdeen are worth approaching.	Forth Ports were consulted including via the Hazard Workshop (noting that the Port of Dundee is operated by Forth Ports) and Aberdeen Harbour Board were contacted as part of the consultation outreach (see section 4.1).
HAV Ship Management	24 September 2021, Regular Operator response	The Proposed Development array area will slightly increase the distance of passage of vessels but no problems are foreseen with the safety of our vessels, including in adverse weather conditions and when considering the cumulative scenario with the other Firth of Forth and Tay developments.	Considered in the assessment of anticipated main commercial route deviations for the cumulative scenario which include routes used by HAV Ship Management operated vessels (see section 15.6.3 and section 15.6.6).
		Our vessels will not choose to make passage internally through the array.	Considered in section 15.5.1.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
Evergas	27 September 2021, Regular Operator response	The Proposed Development array area will have an impact on routing, especially for vessels coming from the north with increases in passage distance of approximately 30 nm. The Proposed Development array area will limit the available area for manoeuvring.	Considered in the assessment of anticipated main commercial route deviations which include a route used by Evergas operated vessels (see section 15.5.1). The Proposed Development array area has been refined based on consultation feedback, including at the south to reduce the size of any deviation around the south (see section 6.1.1.1).
		Inch Cape and Seagreen will have a minor effect on routing but due to the position and large area covered by the Proposed Development array area, the overall effect will be greater.	Considered in the assessment of anticipated main commercial route deviations for the cumulative scenario which include a route used by Evergas operated vessels (see section 15.6.2).
		Our vessels will not make passage internally within the array.	Considered in section 15.5.1.
Royal Northumberland Yacht Club	27 September 2021, email correspondence	We are based in Blyth which is far enough south of the Proposed Development although any navigational information would be of interest in due course to our members passing this way in the future.	Noted.
MCA	28 September 2021, first Hazard Workshop	Suggest that the ScotWind announcement is taken into account for post wind farm routing depending upon the sites which are awarded.	A screening process has been undertaken to determine which other offshore wind farm developments should be considered cumulatively (including the ScotWind areas) (see section 19.1).

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Queried whether deviations due to the presence of Seagreen will be included in the baseline and whether any further vessel traffic data will be collected following the start of the construction of Seagreen.	Seagreen is considered as part of the baseline with main commercial route deviations considering the Proposed Development (for the project in isolation risk assessment, see section 15.5) and Inch Cape (for the cumulative risk assessment, see section 15.6) considered. A summer vessel traffic survey was undertaken in August 2022 to ensure deviations due to the presence of Seagreen are sufficiently incorporated into the baseline (see section 5.2).
		An adjustment to the north-west boundary of the Proposed Development array area should be considered to allow vessels more space in between the Proposed Development array area and Inch Cape.	The Proposed Development array area has been refined based on consultation feedback, including at the north-west to increase the width of the gap between the Proposed Development array area and Inch Cape (see section 6.1.1.1).
NLB	28 September 2021, first Hazard Workshop	Large vessels would be more comfortable passing outside to the east of all the offshore wind farm developments but smaller vessels could come inside between the Proposed Development array area and Inch Cape.	Considered in the assessment of anticipated main commercial route deviations for the cumulative scenario (see section 15.6.2 and section 15.6.5).
RYA Scotland	28 September 2021, first Hazard Workshop	The RYA Coastal Atlas is the highest quality dataset available for recreational vessel movements for which the COVID-19 pandemic (and possibly EU Exit) has had a large effect. Weather is very impactful for recreational vessels and only 20% are currently transmitting via AIS.	The RYA Coastal Atlas has been used as an additional source to characterise recreational vessel movements (see section 5.1). All recreational vessels recorded throughout the vessel traffic surveys were recorded on AIS rather than radar (see section 1.1)

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Current recreational vessel data should be multiplied by five to obtain a more accurate estimate, although it is very difficult to predict the future baseline.	Considered in section 1.1.
		Continental vessels may be less familiar with the presence of the Proposed Development and so are more likely to navigate internally through the array.	Considered as part of the assessment of internal allision risk for recreational vessels in volume 2, chapter 13 .
		A focus of commercial vessels through the gap between the Proposed Development array area and Inch Cape may discourage recreational vessels from navigating in proximity.	Considered in the assessment of anticipated main commercial route deviations for the cumulative scenario (see section 15.6.2 and section 15.6.5). RLB has been reduced (see section 6.1.1).
CA	28 September 2021, first Hazard Workshop	Recreational users generally avoid arrays initially but as they become more common and familiar there is increased comfort with internal navigation noting that this alleviates concerns over encountering commercial vessels.	Considered as part of the assessment of internal allision risk for recreational vessels in volume 2, chapter 13 .
		There are 22,000 fishing spots along the coast between Arbroath and Montrose and so up to 2 nm out to sea is a no-go zone for recreational vessels. The potential for potters to push recreational craft in the array to where commercial vessels are is a cause for concern.	Considered in the assessment of anticipated main commercial route deviations for the cumulative scenario (see section 15.6.2 and section 15.6.5).
		Transits per day should not be used when considering project vessel movements as they shift change. A large number of transits occur at this time and in areas where recreational traffic is located.	At this stage of the Project high-level information relating to vessel movements is provided in terms of return trips but the possible lack of uniformity in transits is noted (see section 6.5).

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
Forth Ports	28 September 2021, first Hazard Workshop	Smaller vessels could pass west of all the offshore wind farm developments if considered a less risky option but for tankers the water depth would be an additional consideration. If vessels are forced to pass west of all the offshore wind farm developments, then Forth Ports will have to contact vessels asking for intentions.	Water depths and the need for Forth Ports to contact vessels are considered in the assessment of anticipated main commercial route deviations for the cumulative scenario (see section 15.6.2 and section 15.6.5). Considered in the assessment of anticipated main commercial route deviations for the cumulative scenario (see section 15.6.5). RLB has been reduced at the western extent (see section 6.1.1).
		There were approximately 120 cruise vessels into the Forth and Tay in 2019 compared with none in 2020 and few in 2021. There are currently 125 booked up for 2022 and therefore 2019 is the most accurate year for passenger vessel data.	The disparity in passenger vessel activity is reflected in the vessel traffic survey data collected in 2020/21. A new vessel traffic survey was undertaken in August 2022 and has been principally used to characterise passenger vessel movements (see section 10.1.2.6).
		Several jack-ups have been towed in the area over the last couple of years.	Relevant operations are discussed in section 10.1.2.4.
RNLI	28 September 2021, first Hazard Workshop	Changes relating to where incidents occur (due to the channelling of vessel traffic) may have a bearing on the future location of SAR assets.	The current location of SAR resources in the region is summarised in section 9 and emergency response capability/access is assessed in volume 2, chapter 13 with input taken from the hazard log (see Appendix B).

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
RNLI	28 September 2021, email correspondence	By potentially displacing vessel traffic westward and inshore to the north of the Firth of Forth, it could in turn increase occurrence of incidents between Anstruther and Arbroath, especially in relation to leisure craft, which would not pass east of the Proposed Development array area give the tight corridor to the west.	Emergency response capability/access is assessed in volume 2, chapter 13 with input taken from the hazard log (see Appendix B).
Forth Yacht Clubs Association	28 September 2021, email correspondence	<p>The Proposed Development is not believed to present a significant hazard to recreational cruising vessels, provided that:</p> <ul style="list-style-type: none"> Current national standards for minimum blade tip height above Mean Sea Level (MSL) is maintained at 24 m; Array boundaries and isolated structures are properly identified by visual and AIS devices and are shown on Admiralty Charts; and The array is not defined as a navigational prohibited area (except for local restrictions immediately adjacent to individual structures). 	<p>The minimum blade tip height (above Lowest Astronomical Tide (LAT)) is 37 m (see section 6.2.2).</p> <p>Consideration has been given to the use of appropriate mitigation to assist safe navigation (see section 17.2).</p> <p>Embedded mitigation measures include marking on charts (see section 17).</p> <p>During no phase of the development will the Proposed Development array area be designated as an area to be avoided (ATBA) (see section 6.1.1).</p>
		Habitual coastal cruising routes for smaller recreational vessels generally lie inshore of the Proposed Development array area while larger craft on east coast transits will likely pass offshore, thereby also reducing exposure to the existing hazard created by the plethora of creel pot markers. Such vessels will generally be equipped with current technology capable of determining the position and nature of such obstructions.	Noted in section 10.1.2.3 and considered in section 15.6.5.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Given the nature of unplanned risks in small craft navigation, such as foundering, fire or collision, emergency access provision should be included in the design of individual structures to enable personnel to escape from the water while summoning or awaiting assistance.	Embedded mitigation measures (see section 18) include compliance with MGN 654 (MCA, 2021). This includes liaison with the MCA on the potential need for suitable access onto structures for third parties in an emergency.
North Star Shipping	1 October 2021, Regular Operator response	We do not foresee any impact on the routing of any specific vessels including safety concerns and adverse weather routing.	Considered in the assessment of anticipated main commercial route deviations for the cumulative scenario which include a route used by North Star Shipping operated vessels (see section 15.6.5).
		Passage planning is down to individual Master's considerations, however we do not foresee Masters choosing to make passage internally through the array.	Considered in section 15.5.1.
Evergas	5 October 2021, email correspondence	Confirmed that the deviation for routing passing south of NnG will involve passing south and then east of the array.	Considered in the assessment of anticipated main commercial route deviations which include a route used by Evergas operated vessels (see section 15.6.2).
		As a gas carrier, significant precaution is taken including allowing for unforeseen machinery failure and therefore keeping close to shore would result in a difficult situation in the event of machinery failure. This includes navigation through the gap between the Proposed Development array area and Inch Cape which would be a shorter route, but the longer alternative is considered safer and would be used.	Considered in the assessment of anticipated main commercial route deviations which include a route used by Evergas operated vessels (see section 15.5.1) and considered in the assessment of vessel displacement in volume 2, chapter 13 , noting that the gap between the Proposed Development array area and Inch Cape is now wider.
RYA Scotland	22 October 2021, email correspondence	The data sources, mitigation measures and list of consultees presented in the Scoping Report (RPS Energy, 2021) are sufficient and appropriate.	Noted.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		The cumulative effects of all offshore developments between the border with England and Duncansby Head should be considered as these will be encountered by vessels on passage from the south to the Caledonian Canal and the Northern Isles and vice versa.	A screening process has been undertaken to determine which other offshore developments should be considered cumulatively, with a 50 nm buffer of the Proposed Development array area used as the limit for screening on the basis that beyond 50 nm there is not anticipated to be a direct pathway (see section 3.3).
UK Chamber of Shipping	26 October 2021, email correspondence	There is growing concern for the narrow channel between the Proposed Development array area and Inch Cape leading to vessel traffic either passing east or west of both developments. In particular, those pushed west may get close to spoil grounds and extensive potting areas. As such a change to the western boundary of the Proposed Development array area to create a wider and more meaningful channel for north-south traffic is suggested.	The Proposed Development array area has been refined based on consultation feedback, including at the north-west to increase the width of the gap between the Proposed Development array area and Inch Cape (see section 6.1.1.1).
NLB	27 October 2021, Scoping response	Of particular interest is the ‘funnelling’ of vessel traffic between both existing and proposed offshore developments, and an assessment of these interactions, along with the increased allision and collision risk, is welcomed.	<p>The proximity of the Proposed Development array area to Seagreen and Inch Cape has been assessed in the form of a navigational corridor safety case (see section 19.1), noting that the Proposed Development array area has been refined based on consultation feedback, including at the north-west to increase the width of the gap (see section 6.1.1.1).</p> <p>A cumulative risk assessment has been undertaken in volume 2, chapter 13 and includes consideration of vessel to vessel collision risk and vessel to structure allision risk.</p>

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
MCA	16 November 2021, Scoping response	The vessel traffic surveys, 12 months of AIS data from 2019 and additional recreational data and consultation feedback is acceptable to the MCA.	Noted in section 5.2.
		Consideration of electromagnetic deviation on ships' compasses should be included within the assessment. The MCA would be willing to accept a three-degree deviation for 95% of the cable route. For the remaining 5% of the cable route no more than five degrees will be attained. The MCA may request a deviation survey post the cable being laid.	Electromagnetic interference is assessed in section 13.6 and includes consideration of the MCA's requirement.
		The wind turbine layout design will require MCA approval prior to construction to minimise the risks to surface vessels, including rescue boats, and Search and Rescue aircraft operating within the site. Any additional navigation safety and/or Search and Rescue requirements, as per MGN 654 Annex 5, will be agreed at the approval stage.	As per section 17, there will be full MGN 654 compliance including consideration of SAR access in liaison with the MCA.
UK Chamber of Shipping	19 November 2021, Scoping response	While the obligation to achieve Net Zero Carbon by 2050 (2045 in Scotland) is supported, the planning and consultation system must also support the wider shipping industry to ensure that navigational safety is not compromised nor economic contribution from the shipping industry jeopardised, as stated within Paragraph 2.6.162 of National Policy Statements EN-3.	The National Policy Statements are not applicable to projects within the Scottish waters, however the essence of the comment is recognised and considered through the NRA.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Recognise that within the cumulative assessment the wider area will be considered, however given the scale of the Proposed Development and its proximity to three consented wind farms, there are concerns that a 10 nm study area is insufficient and suggest that this needs extended, especially to the west and the north to take in the other wind farm areas.	The 10 nm buffer has been defined to provide local context to the analysis of risks and is suitable for collection of radar data (see section 1.1) and is in line with MGN 654 requirements.
		The Proposed Development array area has the potential to amount to considerable navigational squeeze, between it and other developments as the gaps to Inch Cape and Seagreen are minimal. Traffic may choose to route entirely west of the sites resulting in interaction with shallower waters, large amounts of fishing activity and the Forth Ports VTS requesting the intention of vessels. Or traffic may choose to transit entirely east of the sites with greater deviation and further from SAR resources.	Considered in the assessment of anticipated main commercial route deviations for the cumulative scenario (see section 15.6.2).
		Recommend redefining the Proposed Development array area to increase in size the gaps to Inch Cape and Seagreen.	The Proposed Development array area has been refined based on consultation feedback, including at the north-west to increase the width of the gap between the Proposed Development array area and Inch Cape (see section 6.1.1.1).

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Since the vessel traffic data presented is not representative of Inch Cape and Seagreen at full build out there will need to be detailed examination and scenario modelling for traffic behaviour.	<p>A summer vessel traffic survey was undertaken in August 2022 to ensure deviations due to the presence of Seagreen are sufficiently incorporated into the baseline (see section 5.2).</p> <p>The future presence of Inch Cape has been considered in the assessment of anticipated main commercial route deviations for the cumulative scenario (see section 15.6.2).</p>
Ministry of Defence (MoD)	19 November 2021, Scoping response	Defence maritime navigational interests should be considered noting the Proposed Development overlaps two military danger areas and MoD Naval Practice and Exercise Areas (PEXA) X5641 and X5642.	Military features have been considered in the establishment of the baseline environment (see section 7.5) and military vessels have been considered within the assessment of effects (see volume 2, chapter 13) which is summarised in section 18.
Intrada Ship Management	15 December 2021, Regular Operator response	In good weather some vessels on voyage to/from Inverness will make passage across Seagreen and the Proposed Development array area; hence there will be some deviation (plus increased steaming time, more fuel, potentially a missed tide with resultant lost time).	Considered in the assessment of anticipated main commercial route deviations which include a route used by Intrada operated vessels (see section 15.6.2).
		In adverse weather the [Intrada] vessels tend to be closer to the coast but the Inch Cape and NnG have potential to limit the options to the Master for safe passage.	Adverse weather is considered in section 11.

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		There is a pinch point between Inch Cape and the Proposed Development array area forcing traffic to be closer than necessary and increasing the risk of close quarters navigation, or worse (collision along with environmental impacts that can create, let alone injury/life).	The gap between the cumulative proposed developments is considered in section 19.1, noting that the Proposed Development array area has been refined based on consultation feedback, including at the north-west to increase the width of the gap between the Proposed Development array area and Inch Cape (see section 6.1.1.1).
		In adverse weather this pinch point will be even worse. Vessels are slow to respond in adverse weather vessels and need more sea room to turn. In adverse weather Masters will want to find a course and speed that minimises rolling and pitching, and they would not want to deviate from that, but they would have to adjust course as wind and sea direction changes. The presence of the cumulative developments undermine that and the pinch point threatens it completely, if as expected there is an exclusion zone as well.	Adverse weather is considered in section 11, noting that the Proposed Development array area has been refined based on consultation feedback, including at the north-west to increase the width of the gap between the Proposed Development array area and Inch Cape (see section 6.1.1.1). There will be no exclusion during the construction or operation of the project. Safety zones may be in place and are detailed in section 17.
		Intrada vessels also carry deck cargoes, which is an added consideration for the Master in making safe passage and minimising rolling/pitching.	Adverse weather is considered in section 11.
		The Grangemouth trade (transit routes) will also be impacted by the Proposed Development array area.	Cumulative commercial traffic routeing is considered in section 15.6 and considers routes inwards and outwards from the Forth.
MS-LOT	4 February 2022, Scoping opinion	Highlight the Scoping response from the UK Chamber of Shipping and advise that the concerns raised are addressed prior to the EIA Report submission, including agreement on the extent of the shipping and navigation study area.	The Proposed Development array area shipping and navigation study area has been defined to provide local context to the analysis of risks and is suitable for collection of radar data (see section 1.1).

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		The point raised by the UK Chamber of Shipping in relation to the movement of rigs, semisubmersibles and non-regular traffic should be considered and further engagement with the UK Chamber of Shipping is recommended.	Relevant operations are discussed in section 10.1.2.4 and data has been provided by Forth Ports (see section 10.2.2.5).
		Agree with the impacts detailed in the Scoping Report but advise that representations from the MCA, NLB, UK Chamber of Shipping and RYA Scotland are fully addressed. Additionally, it is advised that defence maritime navigational interests must be considered and assessed in the EIA Report and therefore the MoD's representation should be considered.	Scoping responses submitted by the MCA, NLB, UK Chamber of Shipping, RYA Scotland and MoD have been addressed (see various entries in Table 4.1).
		Highlight the representations from the MCA, NLB, UK Chamber of Shipping and RYA Scotland which must be fully addressed. This includes with regard to the likely cumulative and in combination effects on shipping routes and the cumulative impacts of other wind farms and offshore developments in proximity.	Scoping responses submitted by the MCA, NLB, UK Chamber of Shipping and RYA Scotland have been addressed (see various entries in Table 4.1). A cumulative risk assessment has been undertaken in volume 2, chapter 13 with the anticipated main commercial route deviations for the cumulative scenario (see section 15.6) used as input.
Forth Ports	27 July 2022, Second Hazard Workshop	Offshore rig work is sporadic and could include periods of high activity which drops off for months at a time. Many of the rigs are towed into Dundee and then heavy lift vessels are used to transport them to the Firth of Forth.	Oil and gas vessel traffic movements are characterised in section 10.2.2.5, and data has been provided by Forth Ports (see section 10.2).

Stakeholder	Date and Form of Correspondence	Point Raised	Response and Where Addressed in the NRA
		Given the proximity of the Proposed Development array area to the other three offshore wind farm developments in the region, there could be a crossroads formed for vessel traffic.	Cumulative collision risk has been considered in section 19) and a navigation corridor safety case for the gap between the Proposed Development array area and Inch Cape has been undertaken (see section 19.1).
		The area is known to experience significant bad weather.	Noted as part of the assessment of vessel displacement in section 12.2.
RYA Scotland	27 July 2022, Second Hazard Workshop	The change in the Proposed Development array area boundary will make the gap between other wind farms less problematic and some recreational vessels may also cut across the eastern extent of Inch Cape leaving more space.	Noted as part of the assessment of vessel displacement at the cumulative level in section 15.6.2.
		The alignment of the western boundary of the Proposed Development array area and Seagreen is a positive change given that when passage planning it will be more obvious how vessels will transit through the area.	Noted as part of the assessment of vessel displacement at the cumulative level in section 15.6.2.
FMA including representation of SFF	27 July 2022, Second Hazard Workshop	Most of the larger tankers will navigate the inside route closer to shore and so the Marr Bank may prove to increase risk to these vessels, particularly in adverse weather.	Noted as part of the assessment of vessel displacement in section 12.2.
Scottish Whitefish Producers Association	27 July 2022, Second Hazard Workshop	The proposed minimum spacing may be insufficient to allow safe navigation in any weather conditions. Fewer larger wind turbines are therefore preferable.	Noted as part of the assessment of vessel displacement in section 12.3.

4.3 Hazard Workshops

A key element of the consultation undertaken was the Hazard Workshops, meetings of local and national marine stakeholders to identify and discuss potential shipping and navigation hazards. Using the information gathered from the first Hazard Workshop, a hazard log was produced to be used as input into the risk assessment undertaken in **volume 2, chapter 13**. Using the information gathered from the second Hazard Workshop – following changes to the extent of the Proposed Development array area – the hazard log was updated.

This ensured that expert opinion and local knowledge was incorporated into the hazard identification process and that the hazard log was site-specific.

4.3.1 Hazard Workshop Attendance

The first Hazard Workshop was held via teleconferencing (due to restrictions incurred by the COVID-19 pandemic) on 28 September 2021 and was attended by all of the organisations listed below:

- MCA;
- NLB;
- UK Chamber of Shipping;
- RYA Scotland;
- CA;
- Evergas;
- FMA including representation of SFF;
- RNLI;
- Forth Ports;
- INEOS; and
- Shell.

Other Regular Operators were also given the opportunity to attend the first Hazard Workshop.

The second Hazard Workshop was held via teleconferencing on 27 July 2022 and was attended by all of the organisations listed below:

- MCA;
- NLB;
- UK Chamber of Shipping;
- RYA Scotland;
- FMA including representation of SFF;
- RNLI;
- Forth Ports;
- Scottish Whitefish Producers Association;
- FIR for ‘Eyemouth to Cove’, ‘Port Seton’, and ‘Montrose and Arbroath’; and
- Royal Northumberland Yacht Club.

4.3.2 Hazard Workshop Process and Hazard Log

During the Hazard Workshops, key maritime hazards associated with the construction, operation and maintenance and decommissioning of the Proposed Development were identified and discussed. Where appropriate, hazards were considered by vessel type to ensure risk control options could be identified on a type-specific basis.

Following the first Hazard Workshop, the risks associated with the identified hazards were ranked in the hazard log based upon the discussions held during the workshop. Where appropriate, mitigation measures were identified, including any additional measures required to reduce the risks to ALARP. The hazard log was then provided to the Hazard Workshop attendees for comment.

Following the second Hazard Workshop, the hazard log was updated based on reconsideration of the previously identified hazards and associated risks during the workshop. The hazard log was again provided to the Hazard Workshop attendees for comment and their feedback incorporated into the NRA.

The hazard log has been used to inform the risk assessment undertaken in **volume 2, chapter 13** and is presented in full in Appendix B.

5 Data Sources

This section summarises the main data sources used to characterise the shipping and navigation baseline relative to the Proposed Development.

5.1 Summary of Data Sources

The main data sources used in assessing the shipping and navigation baseline relative to the Proposed Development are outlined in Table 5.1.

Table 5.1 Data Sources Used to Inform Shipping and Navigation Baseline

Data	Source(s)	Purpose
Vessel traffic	AIS, radar, and visual observation summer survey data for the Proposed Development array area shipping and navigation study area (14 days, August 2022).	Characterising vessel traffic movements within and in proximity to the Proposed Development array area.
	AIS, radar, and visual observation winter survey data for the Proposed Development array area shipping and navigation study area (14 days, January 2021).	
	AIS summer survey data for the Proposed Development export cable corridor shipping and navigation study area (14 days, August 2022).	Characterising vessel traffic movements within and in proximity to the Proposed Development export cable corridor.
	AIS winter survey data for the Proposed Development export cable corridor shipping and navigation study area (14 days, January 2021).	
	AIS data for the Proposed Development array area shipping and navigation study area (12 months, 2019).	Validation of survey data for Proposed Development array area shipping and navigation study area.
	AIS, radar, and visual observation summer survey data for the Proposed Development array area shipping and navigation study area (14 days, July 2020).	
	Anatec's ShipRoutes database (2022).	
	UK ports: ship arrivals (Department for Transport (DfT), 2022).	Characterising vessel traffic movements in relation to ports local to the Proposed Development.
	UK Coastal Atlas of Recreational Boating (RYA, 2019).	Characterising recreational activity in proximity to the Proposed Development.
Maritime incidents	MAIB marine accidents database (2000 to 2019).	Review of historical maritime incidents within and in proximity to the Proposed Development.
	RNLI incident data (2010 to 2019).	
	DfT UK civilian SAR helicopter taskings (April 2015 to March 2022).	
Other navigational features	Admiralty Chart 213 (UKHO, 2020). Admiralty Charts 156, 160, 175, 190, 210, 268, 273, 278, 734, 735, 1407, and 1409 (UKHO, 2022).	Characterising other navigational features within

Data	Source(s)	Purpose
Weather	Admiralty Sailing Directions North Sea (West) Pilot NP54 (UKHO, 2021).	and in proximity to the Proposed Development.
	Marine Scotland military exercise and danger areas (2019).	
	Wind direction data from Fugro Metocean study undertaken between 2010 and 2012.	Characterising weather conditions in proximity to the Proposed Development for use as input to the collision and allision risk modelling.
	Significant wave height data from Vortex modelling at 10 m height.	
	Tidal data from Admiralty Chart 1407 (UKHO, 2022).	
	Visibility data from Admiralty Sailing Directions North Sea (West) Pilot NP54 (UKHO, 2021).	Identifying periods of adverse weather in proximity to the Proposed Development coinciding with the long-term vessel traffic dataset.
	Case studies of past weather events (Met Office, 2019).	

5.2 Vessel Traffic Surveys

The vessel traffic surveys were undertaken in agreement with the MCA and NLB. Two 14-day AIS, radar, and visual observation surveys undertaken in summer 2022 (2 to 16 August 2022) and winter 2021 (11 to 24 January 2021) have been considered within the baseline for a total of 28 full days, with an earlier survey undertaken in summer 2020 and long-term dataset from 2019 used as validation (see Appendix E and Appendix F).

A number of vessel tracks recorded during the Proposed Development array area survey periods were classified as temporary (non-routine), such as the tracks of the survey vessel, other non-routeing survey vessels and vessels associated with the construction of Neart na Gaoithe (NnG) and Seagreen. These have therefore been excluded from the analysis.

The dataset is assessed in full in section 10.

5.3 Long-Term Vessel Traffic Data

Long-term vessel traffic data consisting of AIS covering 12 months in 2019 was collected from coastal receivers. Taking into account the distance offshore of the Proposed Development array area, the long-term vessel traffic data is considered to be comprehensive for the Proposed Development array area shipping and navigation study area. The assessment of this dataset allowed seasonal variations to be captured and any tangible effects of the COVID-19 pandemic to be observed.

The dataset is assessed in full in Appendix E.

5.4 Data Limitations

5.4.1 Automatic Identification System Data

For the purposes of the NRA, it has been assumed that vessels under an obligation to broadcast information via AIS have done so, both in the vessel traffic surveys and long-term vessel traffic data. It has also been assumed that the details broadcast via AIS (such as vessel type and dimensions) are accurate unless clear evidence to the contrary was identified during Anatec's thorough quality assurance of the data.

5.4.2 Vessel Traffic Data for Proposed Development Export Cable Corridor

The MCA and NLB were content with the methodology for vessel traffic data collection. This method used only the AIS dataset to characterise vessel movements within the Proposed Development export cable corridor shipping and navigation study area. Consequently, this dataset has limitations associated with non-AIS targets.

5.4.3 COVID-19 Pandemic

It is widely accepted that the COVID-19 pandemic has had a substantial effect on shipping movements globally. Therefore, the vessel traffic survey data collected in winter 2021 may be influenced by COVID-19 pandemic. However, in line with best practices the Applicant has agreed the approach to data collection with relevant stakeholders, including the MCA.

Additionally, long-term vessel traffic data predating the COVID-19 pandemic has been used as a secondary source for characterising vessel traffic movements. A 12-month dataset covering 2019 has been referenced where relevant in the characterisation of the vessel traffic baseline. Analysis of the dataset in full is presented in Appendix E.

5.4.4 Historical Incident Data

Although all UK commercial vessels are required to report accidents to the Marine Accident Investigation Branch (MAIB), this is not mandatory for non-UK vessels unless they are in a UK port, within 12 nm of territorial waters (noting that the Proposed Development array area is located approximately 18 nm offshore at the closest point), or carrying passengers to a UK port. There are also no requirements for non-commercial recreational craft to report accidents to the MAIB.

The RNLI incident data cannot be considered comprehensive of all Incidents in the shipping and navigation study areas. Although hoaxes and false alarms are excluded, any incident to which a RNLI resource was not mobilised has not been accounted for in this dataset.

5.4.5 United Kingdom Hydrographic Office Admiralty Charts

The UKHO Admiralty Charts are updated periodically, and therefore the information shown may not reflect the real-time features within the region with total accuracy. For aids to navigation, only those charted and considered key to establishing the shipping and navigation baseline are shown.

During consultation, input has been sought from relevant stakeholders regarding the navigational features baseline. Navigational features are based upon the most recently available UKHO Admiralty Charts and Sailing Directions at the time of writing.

6 Project Design Envelope Relevant to Shipping and Navigation

The NRA reflects the PDE, which is outlined in full in **volume 2, chapter 3**. The following subsections outline the maximum extent of the Proposed Development for which any shipping and navigation hazards are assessed.

6.1 Proposed Development Boundaries

6.1.1 Proposed Development Array Area

The Proposed Development array area is located approximately 30 nm (56 km) east of the entrance to the Firth of Forth, largely covering the Marr Bank in the western half, and partially covering the Berwick Bank at the south-eastern extent. The total area covered by the Proposed Development array area is approximately 294 square nautical miles (nm²) (1,008 square kilometres (km²)) with water depths ranging between 34 and 64 m below Chart Datum (CD).

All surface piercing structures (wind turbines and offshore substation platforms) will be located entirely within the Proposed Development array area, inclusive of blade overfly. The coordinates defining the boundary of the Proposed Development array area are illustrated in Figure 6.1 and provided in Table 6.1. During no phase of the development will the Proposed Development array area be designated as an Area to Be Avoided (ATBA), with navigation only restricted where Safety Zones are active (see section 17).

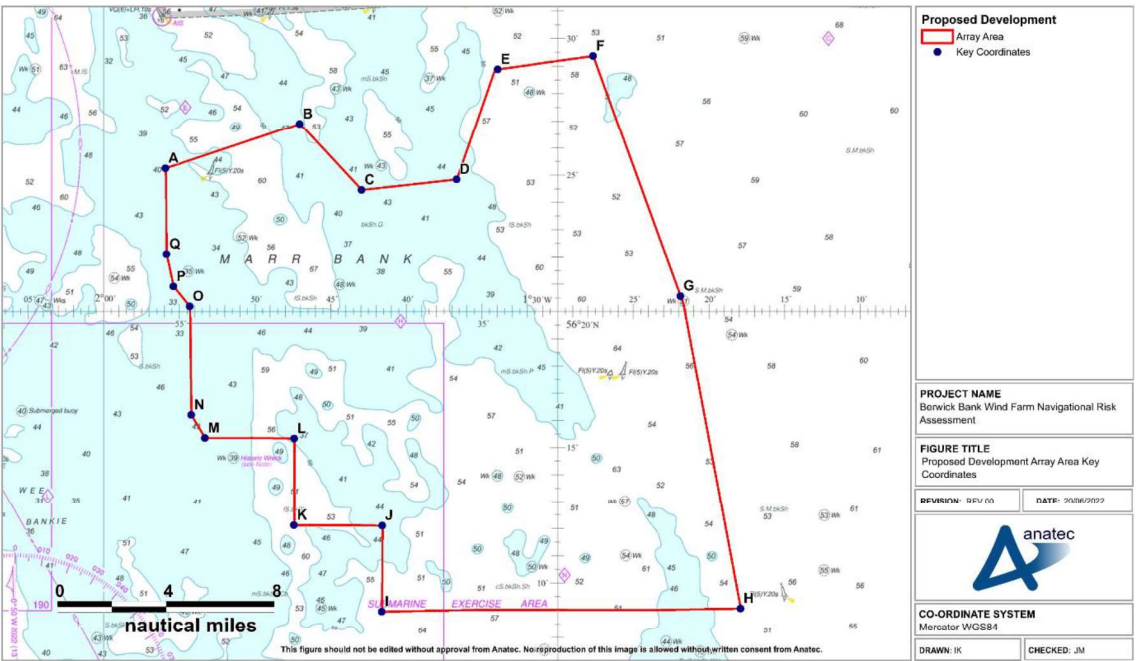


Figure 6.1 Proposed Development Array Area Coordinates

Table 6.1 Coordinates for the Proposed Development Array Area

Point	Latitude (World Geodetic System 1984 (WGS84))	Longitude (WGS84)	Point	Latitude	Longitude
A	56° 25' 15.29" N	001° 55' 54.38" W	J	56° 12' 05.81" N	001° 41' 34.71" W
B	56° 26' 53.97" N	001° 47' 01.94" W	K	56° 12' 06.63" N	001° 47' 25.20" W
C	56° 24' 27.35" N	001° 42' 56.29" W	L	56° 15' 19.63" N	001° 47' 23.81" W
D	56° 24' 50.82" N	001° 36' 39.54" W	M	56° 15' 20.88" N	001° 53' 18.33" W
E	56° 28' 53.53" N	001° 33' 56.25" W	N	56° 16' 11.66" N	001° 54' 12.83" W
F	56° 29' 22.56" N	001° 27' 38.91" W	O	56° 20' 11.40" N	001° 54' 18.67" W
G	56° 20' 33.93" N	001° 21' 51.82" W	P	56° 20' 55.43" N	001° 55' 22.88" W
H	56° 09' 03.42" N	001° 17' 53.10" W	Q	56° 22' 06.25" N	001° 55' 50.75" W
I	56° 08' 56.70" N	001° 41' 36.78" W			

6.1.1.1 Refinement of the Proposed Development Array Area

The Proposed Development array area has been refined from that considered in the Scoping Report for the 2020 Berwick Bank (RPS Energy, 2020), the 2021 Scoping Report (RPS Energy (2021) and at the time of the first Hazard Workshop in September 2021. These refinements are presented in Figure 6.2.

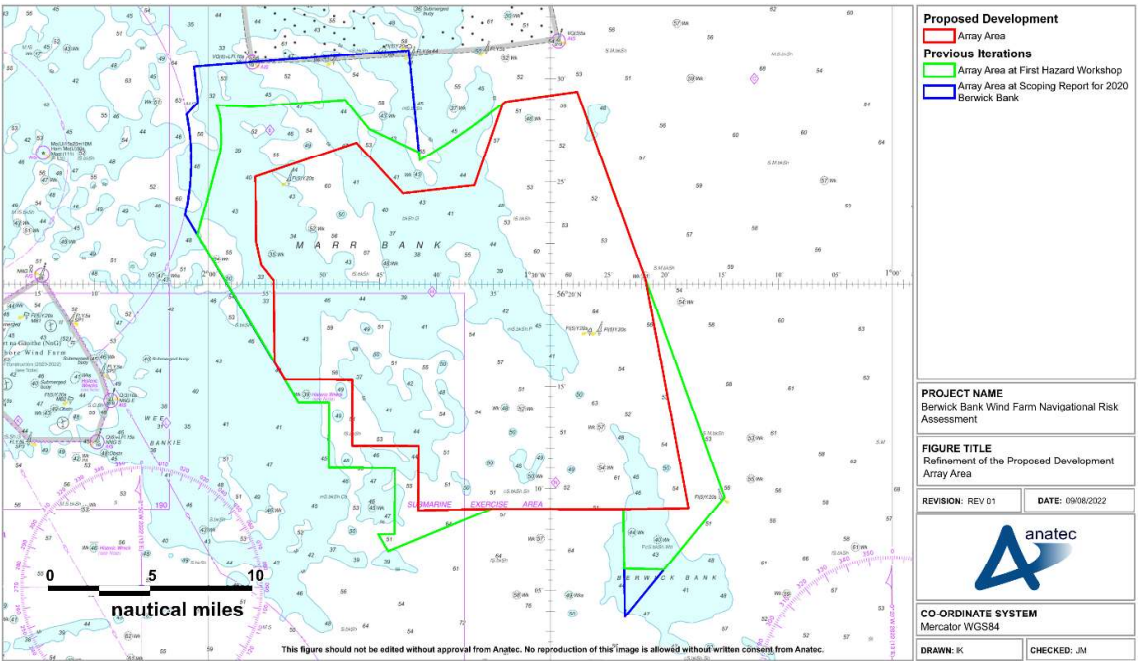


Figure 6.2 Refinement of the Proposed Development Array Area

Following the Scoping Report for the 2020 Berwick Bank, the more pointed south-eastern corner was softened, primarily due to concerns raised by shipping and navigation stakeholders. Additionally, the north-western section of the Proposed Development array area – part of the original proposed Marr Bank Wind Farm development, which was combined with the 2020 Berwick Bank to form the current Berwick Bank Wind Farm – was amended to create a gap between the Proposed Development array area and Seagreen and increase the width of the gap between the Proposed Development array area and Inch Cape. This version of the Proposed Development array area was presented at the first Hazard Workshop.

Following the Scoping Report and the first Hazard Workshop, the north-western section of the Proposed Development array area was again amended to increase the width of the gap between the Proposed Development array area and Seagreen and the Proposed Development array area and Inch Cape. The south-western and south-eastern sections of the Proposed Development array area were also refined further. This version of the Proposed Development array area was presented at the second Hazard Workshop and is considered throughout this NRA.

The Proposed Development array area represents a 23% reduction in extent from that considered in the Scoping Report and a 30% reduction in extent from that considered in the Scoping Report for the 2020 Berwick Bank (when considering the Berwick Bank and Marr Bank developments combined).

6.1.2 Proposed Development Export Cable Corridor

The Proposed Development export cable corridor runs between the southern boundary of the Proposed Development array area and the landfall point at Skateraw. The total area is approximately 49 nm² (168 km²) with water depths within the Proposed Development export cable corridor ranging between 3 and 64 m below CD.

The offshore export cables will be located fully within the Proposed Development export cable corridor. The key coordinates defining the boundary of the Proposed Development export cable corridor are illustrated in Figure 6.3 and provided in Table 6.2.

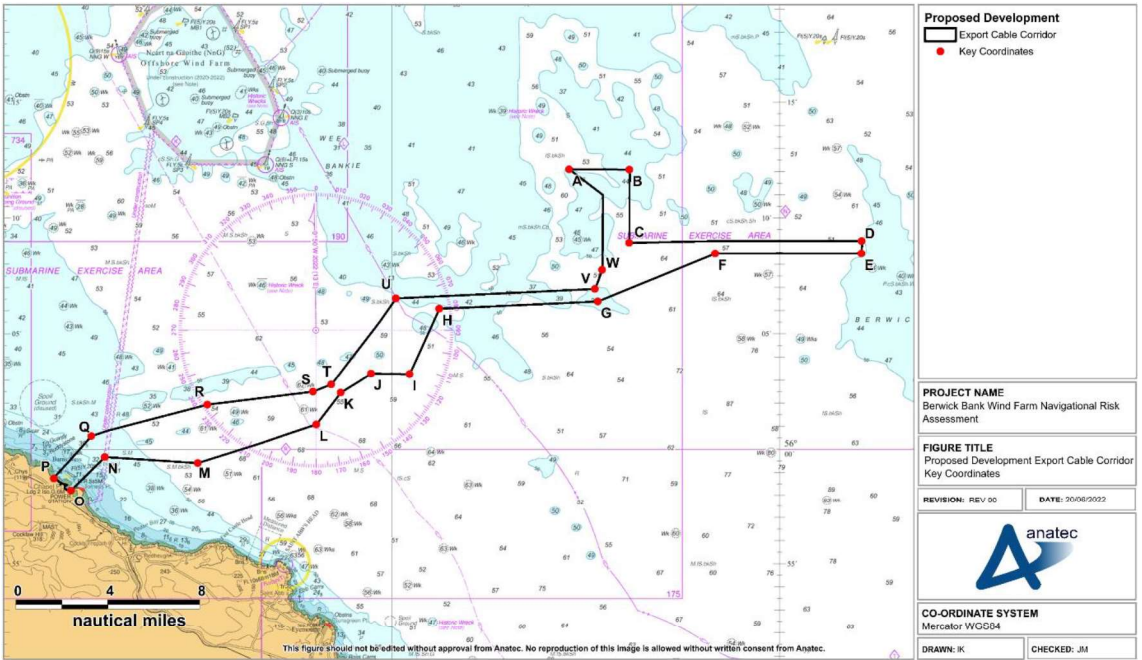


Figure 6.3 Proposed Development Export Cable Corridor Key Coordinates

The Proposed Development export cable corridor has also been refined from that considered in the first Hazard Workshop, with a second landfall location at Thorntonloch removed. A secondary export cable option to Blyth (the Cambois connection) is also under consideration and is considered as part of the cumulative risk assessment (see section 14.1.3).

Table 6.2 Key Coordinates for the Proposed Development Export Cable Corridor

Point	Latitude	Longitude	Point	Latitude	Longitude
A	56° 12' 06.67" N	001° 46' 15.17" W	M	55° 59' 24.57" N	002° 15' 00.30" W
B	56° 12' 05.81" N	001° 41' 34.71" W	N	55° 59' 39.89" N	002° 22' 12.17" W
C	56° 08' 56.70" N	001° 41' 36.78" W	O	55° 58' 12.94" N	002° 24' 49.15" W
D	56° 09' 00.70" N	001° 23' 36.62" W	P	55° 58' 43.90" N	002° 26' 07.91" W
E	56° 08' 28.36" N	001° 23' 36.74" W	Q	56° 00' 34.35" N	002° 23' 14.70" W
F	56° 08' 28.59" N	001° 34' 56.40" W	R	56° 01' 55.83" N	002° 14' 15.11" W
G	56° 06' 24.23" N	001° 44' 02.07" W	S	56° 02' 29.87" N	002° 06' 04.99" W
H	56° 06' 05.11" N	001° 56' 17.93" W	T	56° 02' 48.76" N	002° 04' 39.42" W
I	56° 03' 15.31" N	001° 58' 36.13" W	U	56° 06' 32.18" N	001° 59' 40.32" W
J	56° 03' 16.70" N	002° 01' 34.93" W	V	56° 06' 56.29" N	001° 44' 14.70" W
K	56° 02' 27.08" N	002° 03' 56.31" W	W	56° 07' 45.96" N	001° 43' 41.16" W
L	56° 01' 04.84" N	002° 05' 49.50" W			

6.2 Surface Infrastructure

6.2.1 Indicative Array Layout

Up to 317 surface structures will be installed within the Proposed Development array area, consisting of up to 307 wind turbines and 10 offshore substation platforms. The final positions of surface structures have not yet been defined, but for the purposes of the NRA an indicative worst case array layout has been determined and is presented in Figure 6.4.

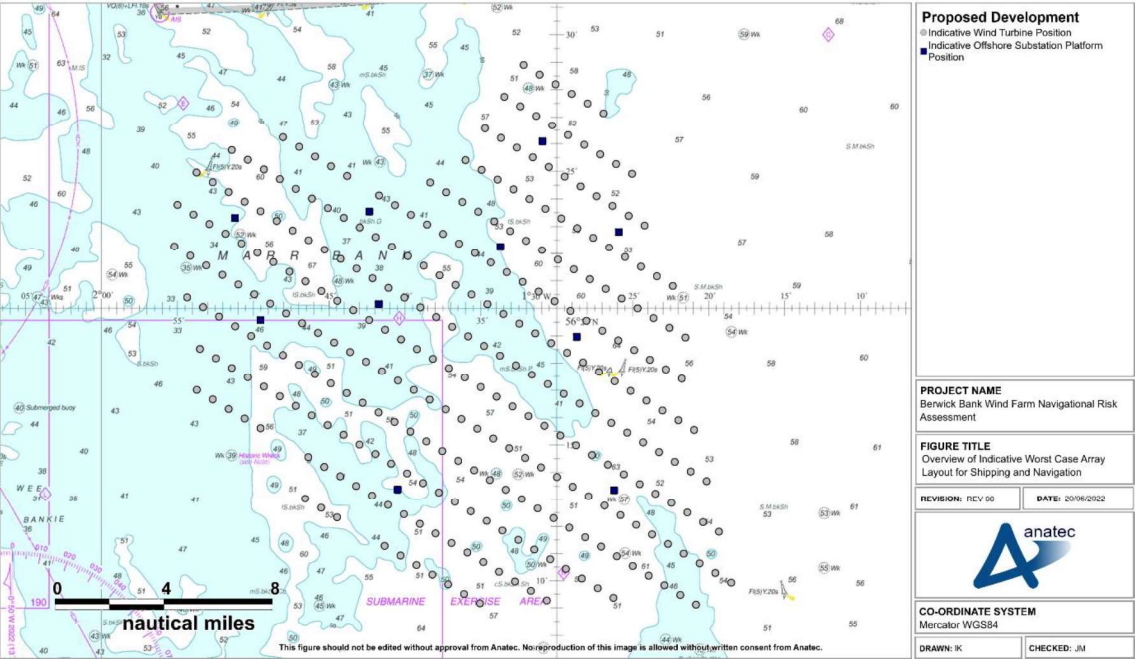


Figure 6.4 Overview of Indicative Worst Case Array Layout for Shipping and Navigation

The indicative worst case array layout consists of a full build out of the Proposed Development array area to maximise the spatial extent of vessel deviations and the maximum possible number of surface structures to maximise exposure for passing (or adrift) vessels.

The minimum spacing within the PDE is 1,000 m, however with the indicative layout relevant for shipping and navigation this spacing varies as follows. The indicative array layout includes at least two lines of orientation³ for wind turbines with a minimum spacing between wind turbines (measured centre-to-centre) of 1,265 m. The minimum spacing within the PDE is 1,000 m, with this spacing considered within the risk assessment where appropriate. The offshore substation platforms are evenly spaced between the wind turbine rows, giving an overall minimum spacing between structures for the indicative array layout (measured

³ In the event that the Project brings forward a single line of orientation layout post-consent, it is acknowledged that additional assessment will be required in line with MGN 654 requirements. This includes the undertaking of a safety justification to demonstrate that risk to navigation and SAR is ALARP, in consultation with the MCA.

centre-to-centre) of 1,265 m, in the northeast-southwest direction. The minimum spacing between structures in a northwest-southeast orientation is 1,780 m.

6.2.2 Wind Turbines

The wind turbines within the indicative array layout each have a maximum rotor diameter of 222 m and maximum blade tip height (above LAT) of between 257 and 267 m. However, the maximum design scenario values for shipping and navigation are associated with the largest possible wind turbines (which would not be used for the indicative array layout). These are 310 m for rotor diameter and between 307 and 355 m for maximum blade tip height.

Piled jackets and suction caisson jackets foundations have been considered as the maximum design scenario for shipping and navigation as these foundation types provide the maximum structure dimension at the sea surface, and therefore maximise exposure for passing (or adrift) vessels. The maximum design scenario for the wind turbines, which assume use of a piled jacket or suction caisson jacket foundation design, are provided in Table 6.3.

Table 6.3 Wind Turbines Maximum Design Scenario for Shipping and Navigation

Parameter	Maximum Design Scenario for Shipping and Navigation
Foundation type	Piled jacket/suction caisson jacket
Diameter of jacket leg	3.5 m
Jacket leg spacing at sea surface	30 m
Number of legs	4
Overall dimensions at sea surface	33.5×33.5 m
Maximum blade tip height (above LAT)	307 m to 355 m
Minimum blade tip height (above LAT)	37 m
Maximum rotor diameter	310 m

Floating foundations are not included in the PDE. Further descriptions of the foundation types under consideration are provided in **volume 2, chapter 3**.

6.2.3 Offshore Substation Platforms

The offshore substation platforms will be installed on piled jackets or suction caisson jacket foundations, with two types of substation under consideration – High Voltage Alternating Current (HVAC) and High Voltage Direct Current (HVDC). For HVAC offshore substation platforms the maximum topside dimensions are 39×39 m and for HVDC offshore substation platforms are 100×85 m.

6.3 Subsea Infrastructure

Three types of subsea cables will be installed: inter-array cables, interconnector cables and offshore export cables. Each category of subsea cables is summarised in the following subsections.

6.3.1 Inter-Array Cables

The inter-array cables will be fully installed within the Proposed Development array area to connect individual wind turbines to each other and to the offshore substation platforms. Up to 661 nm (1,225 km) of inter-array cables will be required with up to 78 crossings, although the final length and number of crossings will depend upon the final array layout. The maximum height of inter-array cable crossings will be 3.5 m.

6.3.2 Interconnector Cables

The interconnector cables will be fully installed within the Proposed Development array area to provide interlink connections between the offshore substation platforms. Up to 46 nm (85 km) of interconnector cables will be required, although the final length will depend upon the final array layout.

6.3.3 Offshore Export Cables

The offshore export cables will be installed within the Proposed Development export cable corridor to carry the electricity generated by the wind turbines to the landfall location (Skateraw). Up to eight offshore export cables and 471 nm (872 km) of offshore export cables will be required with up to 16 crossings. The maximum height of offshore export cables crossings will be 3.5 m.

6.3.4 Cable Burial and Protection

Where available, the primary means of cable protection will be by seabed burial. The extent and method by which the subsea cables will be buried will depend on the results of a detailed seabed survey of the final subsea cable routes and associated cable burial risk assessment. However, a minimum burial depth of 0.5 m for all subsea cables associated with the Proposed Development is assumed as part of the maximum design scenario.

Where cable burial is not possible, alternative cable protection methods may be deployed which will be determined within the cable burial risk assessment. These methods may include a combination of rock installation, concrete mattresses, rock bags, cast iron shells, sleeving and Cable Protection Systems (CPS). It is assumed that up to 15% of all subsea cables may require cable protection as part of the maximum design scenario with a maximum cable protection height of 3 m and width of 20 m (excluding crossings).

6.4 Timescales

6.4.1 Construction Phase

The offshore construction phase will indicatively commence in December 2025, last for up to eight years, and be undertaken in up to three phases.

6.4.2 Operation and Maintenance Phase

The operation and maintenance phase will last for up to 35 years.

6.4.3 Decommissioning Phase

The decommissioning phase will generally be the reverse of the construction phase in terms of duration, vessel types and vessel numbers. It is anticipated that all sea surface structures will be completely removed above the seabed and all subsea cables will be left in situ (although best practice will be followed at the time of decommissioning).

6.5 Vessel and Helicopter Numbers

This subsection provides an overview of maximum vessel numbers for each activity and phase of the Proposed Development. Details relating to the routes to be undertaken by vessels associated with the Proposed Development are not available at this stage but will be defined as part of marine coordination (see section 6.5.2). Return trips may not occur uniformly throughout each phase depending on factors such as relevant activities and crew transfer times.

6.5.1 Construction Phase

Up to 10,964 return trips by construction vessels (excluding site preparation activities) may be made throughout the construction phase. The maximum number of vessel types associated with construction phase activities are summarised in Table 6.4.

Table 6.4 Maximum Vessel Numbers per Vessel Type for Construction Phase

Vessel Type	Relevant Installation Activities	Maximum Number of Vessels	Maximum Number of Return Trips
Main installation vessel	<ul style="list-style-type: none">Wind turbine foundations;Wind turbines;Offshore substation platform foundations; andOffshore substation platform topsides.	9	297

Vessel Type	Relevant Installation Activities	Maximum Number of Vessels	Maximum Number of Return Trips
Cargo barge	<ul style="list-style-type: none">Wind turbine foundations;Offshore substation platform foundations; andOffshore substation platform topsides.	14	194
Support vessel	<ul style="list-style-type: none">Wind turbine foundations;Wind turbines; andLandfall.	9	714
Tug/anchor handler	<ul style="list-style-type: none">Wind turbine foundations;Offshore substation platform foundations;Offshore substation platform topsides;Inter-array cables; andLandfall.	22	794
Cable installation vessel	<ul style="list-style-type: none">Inter-array cables; andOffshore export cables.	6	36
Guard vessel	<ul style="list-style-type: none">Wind turbine foundations;Wind turbines;Offshore substation platform foundations;Offshore substation platform topsides;Inter-array cables;Offshore export cables; andLandfall.	22	1,488
Survey vessel	<ul style="list-style-type: none">Inter-array cables;Offshore export cables; andLandfall.	8	464
Crew Transfer Vessel (CTV)	<ul style="list-style-type: none">Wind turbine foundations;Wind turbines;Offshore substation platform foundations;Offshore substation platform topsides;Inter-array cables;Offshore export cables; andLandfall.	14	3,342

Vessel Type	Relevant Installation Activities	Maximum Number of Vessels	Maximum Number of Return Trips
Scour/cable protection installation vessel	<ul style="list-style-type: none">Wind turbine foundations;Wind turbines;Offshore substation platform foundations;Inter-array cables; andOffshore export cables.	10	3,390
Resupply vessel	<ul style="list-style-type: none">Wind turbine foundations; andWind turbines.	20	245

Additionally, up to 3,214 return trips by up to 13 helicopters may be made during the construction phase.

6.5.2 Operation and Maintenance Phase

Up to 2,323 return trips per year by operation and maintenance vessels may be made throughout the operation and maintenance phase.⁴ The maximum number of vessel types associated with the operation and maintenance phase are summarised in Table 6.5.

Table 6.5 Maximum Vessel Numbers per Vessel Type for Operation and Maintenance Phase

Vessel Type	Maximum Number of Vessels	Maximum Number of Return Trips
CTV	4	832 per year
Jack-up vessel	1	2 per year
Cable repair vessel	1	5 over the 35-year operation and maintenance phase
Service Operations Vessel (SOV)	2	26 per year
SOV daughter craft	2	4 per day
Cable survey vessel	1	1 return trip (four-week survey)
Excavator/backhoe dredger	1	5 over the 35-year operation and maintenance phase

⁴ Assuming that a cable repair vessel or excavator/backhoe dredger are not required more than once per year.

During both the construction and operation and maintenance phases, logistics will be managed by a marine coordination team. An integrated Health, Safety and Environment (HSE) management system will be in place to ensure control of all vessels and their respective works. The Project will be operational 24/7.

6.5.3 Decommissioning Phase

As noted in section 6.4.3, the decommissioning phase will generally be the reverse of the construction phase including in terms of vessel types and vessel numbers.

6.6 Maximum Design Scenario

The maximum design scenario for each shipping and navigation hazard is provided in Table 6.6 and is based on the parameters described in the previous subsections.

Table 6.6 Maximum Design Scenario by Hazard for Shipping and Navigation

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Vessel displacement	Construction	<ul style="list-style-type: none"> Single continuous construction phase of up to 96 months; Full build out of the Proposed Development array area; Buoyed construction area encompassing the maximum extent of the Proposed Development array area including presence of 500 m construction Safety Zones and 50 m pre commissioning Safety Zones; Up to eight offshore export cables with total length 471 nm (872 km); Up to 22 guard vessels making up to 1,488 return trips; Up to eight survey vessels making up to 464 return trips; Up to 14 CTVs making up to 3,342 return trips; and Up to ten cable protection installation vessels making up to 3,390 return trips. 	Largest possible extent, greatest number of vessel activities associated with the Proposed Development export cable corridor (noting that construction/decommissioning vessel activities associated with the Proposed Development array area will be contained within the buoyed construction/decommissioning area) and greatest duration resulting in the maximum spatial and temporal effect on vessel displacement.
	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Full build out of the Proposed Development array area; and Presence of 500 m operational Safety Zones for major maintenance activities. 	
	Decommissioning	The maximum design scenario for the decommissioning phase will be similar to the construction phase noting that from a shipping and navigation perspective the activities during both of these phases will be similar.	

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Increased vessel to vessel collision risk between a third-party vessel and a project vessel	Construction	<ul style="list-style-type: none"> Single continuous construction phase of up to 96 months; Full build out of the Proposed Development array area; Buoyed construction area encompassing the maximum extent of the Proposed Development array area including presence of 500 m construction Safety Zones and 50 m pre commissioning Safety Zones; Up to nine main installation vessels making up to 297 return trips; Up to 14 cargo barges making up to 194 return trips; Up to nine support vessels making up to 714 return trips; Up to 22 tug/anchor handlers making up to 794 return trips; Up to six cable installation vessels making up to 36 return trips; Up to 22 guard vessels making up to 1,488 return trips; Up to eight survey vessels making up to 464 return trips; Up to 14 CTVs making up to 3,342 return trips; Up to ten cable protection installation vessels making up to 3,390 return trips; and Up to 20 resupply vessels making up to 245 return trips. 	Largest possible extent, greatest number of vessel movements and activities associated with the Proposed Development and greatest duration resulting in the maximum spatial and temporal effect on vessel to vessel collision risk involving a third-party vessel and a project vessel.

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Full build out of the Proposed Development array area; Presence of 500 m operational Safety Zones for major maintenance activities; Up to four CTVs making up to 832 return trips per year; Up to one jack-up vessel making up to two return trips per year; Up to one cable repair vessel making up to five return trips throughout the operation and maintenance phase; Up to two SOVs making up to 26 return trips per year; Up to two SOV daughter craft making up to four movements per day around the Proposed Development array area; Up to one cable survey vessel making one return trip per year; and Up to one excavator/backhoe dredger making up to five return trips throughout the operation and maintenance phase. 	
	Decommissioning	The maximum design scenario for the decommissioning phase will be similar to the construction phase noting that from a shipping and navigation perspective the activities during both of these phases will be similar.	

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Increased vessel to vessel collision risk between third-party vessels	Construction	<ul style="list-style-type: none"> Single continuous construction phase of up to 96 months; Full build out of the Proposed Development array area; Buoyed construction area encompassing the maximum extent of the Proposed Development array area including presence of 500 m construction Safety Zones and 50 m pre commissioning Safety Zones; Up to eight offshore export cables with total length 471 nm (872 km); Up to six cable installation vessels making up to 36 return trips; Up to 22 guard vessels making up to 1,488 return trips; Up to eight survey vessels making up to 464 return trips; Up to 14 CTVs making up to 3,342 return trips; and Up to ten cable protection installation vessels making up to 3,390 return trips. 	Largest possible extent, greatest number of construction vessel activities associated with the Proposed Development export cable corridor (noting that construction/decommissioning vessel activities associated with the Proposed Development array area will be contained within the buoyed construction/decommissioning area) and greatest duration resulting in the maximum spatial and temporal effect on vessel to vessel collision risk between third-party vessels.
	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Full build out of the Proposed Development array area; and Presence of 500 m operational Safety Zones for major maintenance activities. 	
	Decommissioning	The maximum design scenario for the decommissioning phase will be similar to the construction phase noting that from a shipping and navigation perspective the activities during both of these phases will be similar.	

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Vessel to structure allision risk	Construction	<ul style="list-style-type: none"> Single continuous construction phase of up to 96 months; Full build out of the Proposed Development array area; Buoyed construction area encompassing the maximum extent of the Proposed Development array area including presence of 500 m construction Safety Zones and 50 m pre commissioning Safety Zones; Up to 307 wind turbines and ten offshore substation platforms partially constructed or not yet commissioned and located as per Figure 6.4; Wind turbines on piled jacket or suction caisson jacket foundations; and Offshore substation platforms on piled jacket or suction caisson jacket foundations. 	Largest possible extent, greatest number of surface infrastructure and greatest duration resulting in the maximum spatial and temporal effect on vessel to structure allision risk.
	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Full build out of the Proposed Development array area; Up to 307 wind turbines and 10 offshore substation platforms located as per Figure 6.4; Wind turbines on piled jacket or suction caisson jacket foundations; and Offshore substation platforms on piled jacket or suction caisson jacket foundations. 	
	Decommissioning	The maximum design scenario for the decommissioning phase will be similar to the construction phase noting that from a shipping and navigation perspective the activities during both of these phases will be similar.	

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Reduced access to local ports	Construction	<ul style="list-style-type: none"> Single continuous construction phase of up to 96 months; Full build out of the Proposed Development array area; Buoyed construction area encompassing the maximum extent of the Proposed Development array area including presence of 500 m construction Safety Zones and 50 m pre commissioning Safety Zones; Up to nine main installation vessels making up to 297 return trips; Up to 14 cargo barges making up to 194 return trips; Up to nine support vessels making up to 714 return trips; Up to 22 tug/anchor handlers making up to 794 return trips; Up to six cable installation vessels making up to 36 return trips; Up to 22 guard vessels making up to 1,488 return trips; Up to eight survey vessels making up to 464 return trips; Up to 14 CTVs making up to 3,342 return trips; Up to ten cable protection installation vessels making up to 3,390 return trips; and Up to 20 resupply vessels making up to 245 return trips. 	Largest possible extent, greatest number of vessel activities associated with the Proposed Development and greatest duration resulting in the maximum spatial and temporal effect on access to local ports.

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Full build out of the Proposed Development array area; Presence of 500 m operational Safety Zones for major maintenance activities; Up to four CTVs making up to 832 return trips per year; Up to one jack-up vessel making up to two return trips per year; Up to one cable repair vessel making up to five return trips throughout the operation and maintenance phase; Up to two SOVs making up to 26 return trips per year; Up to one cable survey vessel making one return trip per year; and Up to one excavator/backhoe dredger making up to five return trips throughout the operation and maintenance phase. 	
	Decommissioning	The maximum design scenario for the decommissioning phase will be similar to the construction phase noting that from a shipping and navigation perspective the activities during both of these phases will be similar.	

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Reduction of under keel clearance	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Up to 661 nm (1,225 km) of inter-array cables; Up to 51 nm (94 km) of interconnector cables; Up to eight offshore export cables with total length 471 nm (872 km); Minimum burial depth of 0.5 m for all subsea cables; Cable protection requirement for up to 15% of all subsea cables; Maximum cable protection height of 3 m and width of 20 m for all subsea cables (excluding crossings); Up to 78 inter-array cable crossings with maximum height of 3.5 m; and Up to 16 offshore export cables crossings with maximum height of 3.5 m. 	Largest possible extent of seabed infrastructure and greatest duration resulting in the maximum spatial and temporal effect on under keel clearance.

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Anchor interaction with subsea cables	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Up to 661 nm (1,225 km) of inter-array cables; Up to 51 nm (94 km) of interconnector cables; Up to eight offshore export cables with total length 471 nm (872 km); Minimum burial depth of 0.5 m for all subsea cables; Cable protection requirement for up to 15% of all subsea cables; Maximum cable protection height of 3 m and width of 20 m for all subsea cables (excluding crossings); Up to 78 inter-array cable crossings with maximum height of 3.5 m; and Up to 16 offshore export cables crossings with maximum height of 3.5 m. 	Largest possible extent of seabed infrastructure and greatest duration resulting in the maximum spatial and temporal effect on anchor interaction with subsea cables.

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Interference with marine navigation, communications and position fixing equipment	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Full build out of the Proposed Development array area; Presence of 500 m operational Safety Zones for major maintenance activities; Up to 307 wind turbines and 10 offshore substation platforms partially constructed or not yet commissioned and located as per Figure 6.4; Wind turbines on piled jacket or suction caisson jacket foundations; Offshore substation platforms on piled jacket or suction caisson jacket foundations; Up to 661 nm (1,225 km) of inter-array cables; Up to 46 nm (85 km) of interconnector cables; and Up to eight offshore export cables with total length 471 nm (872 km). 	Largest possible extent of surface and seabed infrastructure resulting in the maximum spatial and temporal effect on interference with marine navigation, communications and position fixing equipment.

Potential Hazard	Phase(s)	Maximum Design Scenario for Shipping and Navigation	Justification
Reduction of emergency response capability	Operation and maintenance	<ul style="list-style-type: none"> Operation and maintenance phase of up to 35 years; Full build out of the Proposed Development array area; Up to 307 wind turbines and ten offshore substation platforms partially constructed or not yet commissioned and located as per Figure 6.4; Up to four CTVs making up to 832 return trips per year; Up to one jack-up vessel making up to two return trips per year; Up to one cable repair vessel making up to five return trips throughout the operation and maintenance phase; Up to two SOVs making up to 26 return trips per year; Up to two SOV daughter craft making up to four movements per day around the Proposed Development array area; Up to one cable survey vessel making one return trip per year; and Up to one excavator/backhoe dredger making up to five return trips throughout the operation and maintenance phase. 	Largest possible extent, greatest number of vessel activities associated with the Proposed Development, greatest number of surface infrastructure and greatest duration resulting in the maximum spatial and temporal effect on emergency response capability.

7 Navigational Features

A plot of navigational features in proximity to the Proposed Development array area and export cable corridor is presented in Figure 7.1. Each of the features shown is discussed in the following subsections and has been identified using the most detailed UKHO Admiralty Charts available.

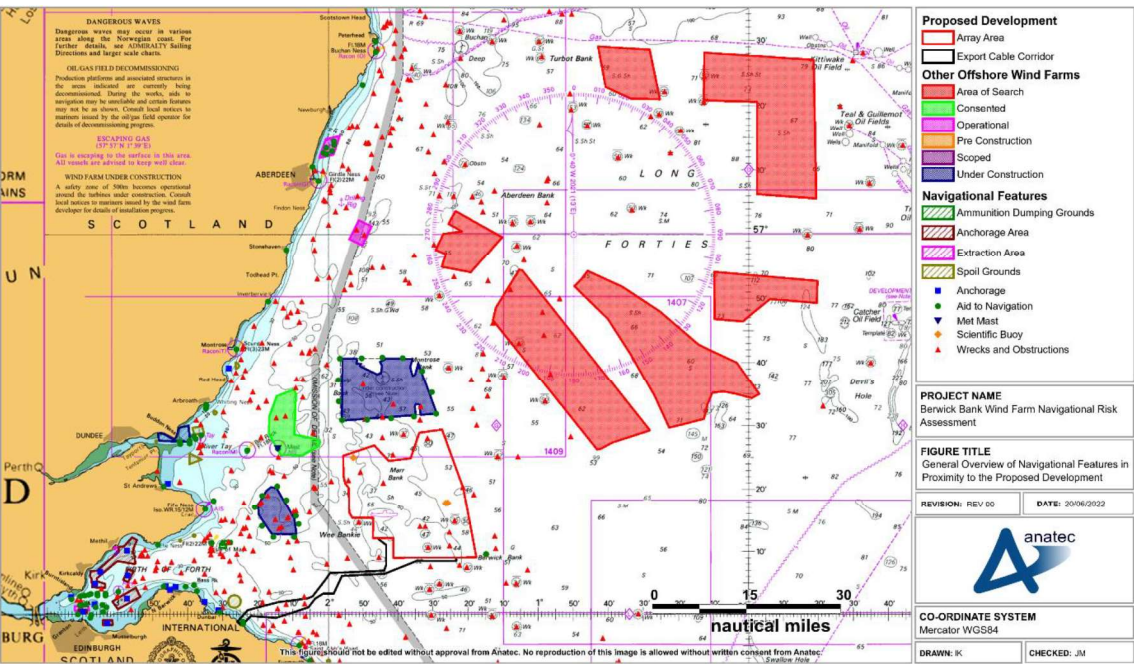


Figure 7.1 General Overview of Navigational Features in Proximity to the Proposed Development

7.1 Other Offshore Wind Farm Developments

A plot of nearby other offshore wind farm developments in proximity to the Proposed Development is presented in Figure 7.2, colour-coded by development status.

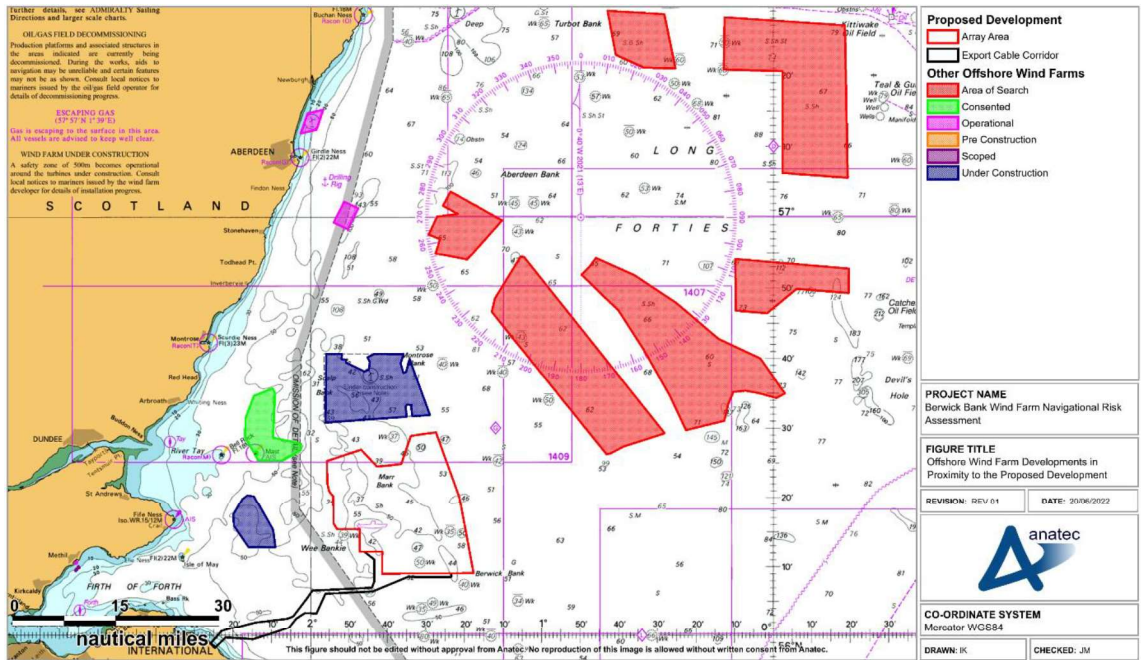


Figure 7.2 Offshore Wind Farm Developments in Proximity to the Proposed Development

The closest offshore wind farm developments to the Proposed Development array area are Seagreen Offshore Wind Farm (hereafter referred to as 'Seagreen') located approximately 2.7 nm to the north, and Inch Cape Offshore Wind Farm (hereafter referred to as 'Inch Cape') located approximately 4.1 nm to the west. It is noted that these distances are measured between the consented boundaries of the respective developments⁵.

Seagreen is under construction with the construction buoyage deployed in September 2021 and the development expected to be fully commissioned in November 2023 (Seagreen Wind Energy Ltd., 2020). A variation to development parameters for Inch Cape was consented in June 2019, with CfD secured in July 2022 (Department for Business, Energy and Industrial Strategy (BEIS), 2022).

NnG is also located in the region, approximately 8.8 nm to the west of the Proposed Development array area. NnG is under construction with the construction buoyage deployed in May 2020 and the development expected to be fully commissioned in November 2022 (EDF, 2020).

Other offshore wind farm developments in the region include Kincardine (operational), European Offshore Wind Deployment Centre (EOWDC) (operational), Forthwind (scoped) and ScotWind sites Cluaran Deas Ear, Morven, Bellrock, Campion, Mara Mhor, and Ossian (all areas of search). Further details are included in section 14.1.

⁵ The closest distance to the final array layout for Seagreen is approximately 2.3 nm measured from the centre of the closest structure location. A final array layout for Inch Cape has not yet been published.

7.2 Ports and Related Services

A plot of nearby ports and harbours is presented in Figure 7.3. It is noted that there are other ports and harbours within the Firth of Forth not labelled in Figure 7.3, but for clarity only the more prominent ports and harbours are shown. Ports and harbours within the Firth of Forth are considered collectively throughout the NRA.

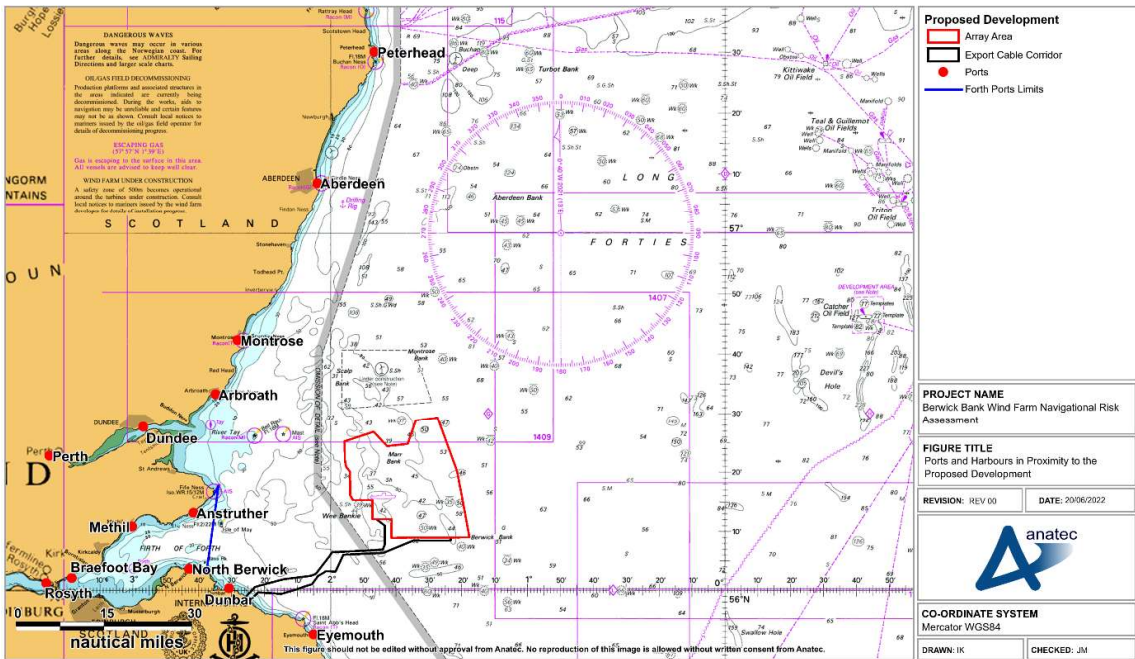


Figure 7.3 Ports and Harbours in Proximity to the Proposed Development

The closest port or harbour to the Proposed Development array area is Arbroath Harbour, located approximately 23 nm to the north-west, on the Angus coast. The Admiralty Sailing Directions describe Arbroath as “mainly a fishing port used by small and medium-sized fishing vessels” which is also occupied by a yacht marina (UKHO, 2021).

Montrose Port is located approximately 24 nm to the north-west on the Angus coast and is described by the Admiralty Sailing Directions as “a commercial port and a supply base for the offshore oil industry” (UKHO, 2021).

7.2.1 Ports and Harbours within the Firth of Forth

The Firth of Forth contains many ports and harbours of varying sizes, including:

- Aberdour;
- Anstruther;
- Braefoot Bay;
- Burntisland;
- Cockenzie;
- Crail;
- Grangemouth;
- Granton;
- Leith;
- Methil;
- North Berwick;
- North Queensferry;
- Pettycur Pier;
- Pittenweem;
- Rosyth; and
- St. Monans.

Grangemouth is “the largest port in Scotland” and handles “all types of vessels, including container vessels, tankers and LPG carriers” (UKHO, 2021). Rosyth, Leith and Braefoot Bay are also prominent ports which handle a range of vessel types.

A VTS – the Forth and Tay Navigation Service – is operated from Grangemouth with “all vessels of 50 GT and over required to report on passing the eastern limit and at all subsequent reporting points” (UKHO, 2021). Forth Ports have confirmed during consultation that the VTS does not extend as far out as the Firth of Forth offshore wind farm developments, including the Proposed Development array area. Forth Ports do not advise vessel traffic as far offshore as the Proposed Development array area.

7.2.2 Vessel Arrivals

The number of vessel arrivals at ports in the region, as reported by the Department for Transport (DfT), is presented in Figure 7.4. These statistics exclude some vessel movements which occur within port or harbour limits, but nevertheless give a clear indication of the relative traffic levels and trends.

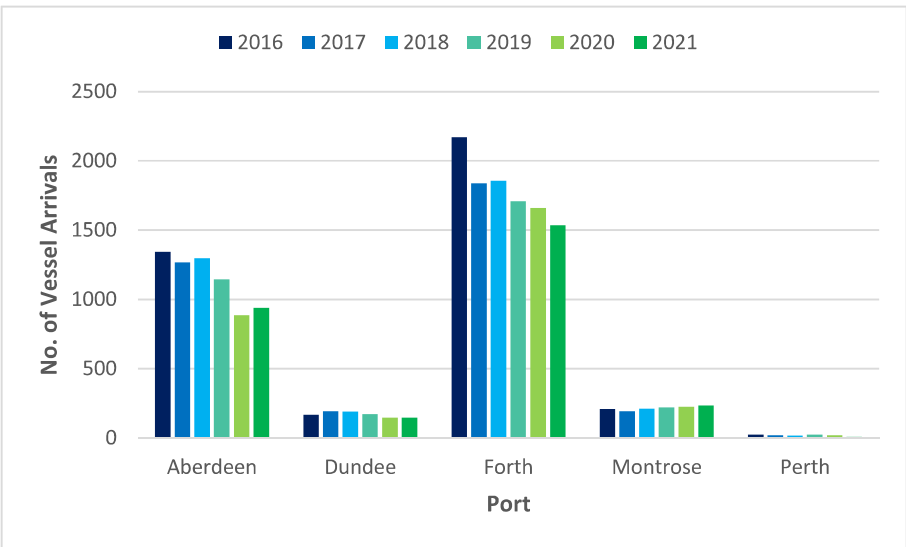


Figure 7.4 Vessel Arrivals to Commercial Ports in Proximity to the Proposed Development

As a collective, ports in the Forth are the most frequented commercial ports in the area followed by Aberdeen, although both ports have experienced a slight downward trend in vessel arrivals in recent years. In the case of Aberdeen, this may be partially related to the effects of COVID-19 pandemic.

7.3 Aids to Navigation

A plot of nearby aids to navigation is presented in Figure 7.5. The information provided in Figure 7.5 and the following text is current as of August 2022.

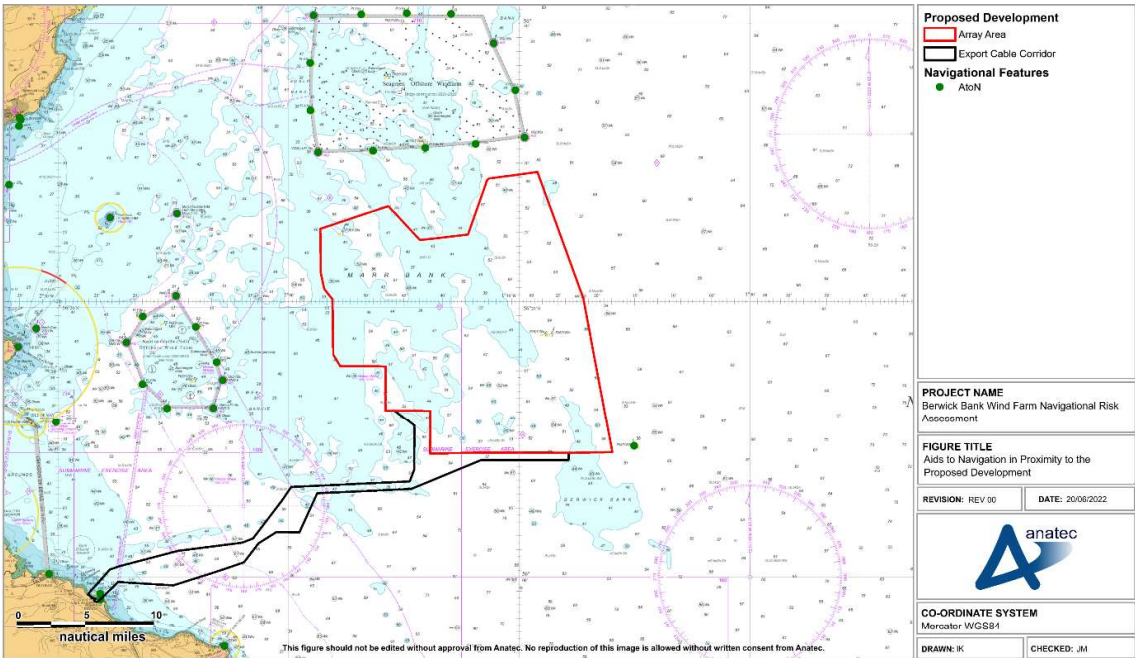


Figure 7.5 Aids to Navigation in Proximity to the Proposed Development

There are no aids to navigation located within the Proposed Development array area – there are, however, scientific buoys and Light Detection and Ranging (Lidar) equipment present to gauge readings.

There is one aid to navigation located within the Proposed Development export cable corridor, a special mark situated in the approaches to Torness Power Station at the Skateraw landfall location.

There is a group of nine aids to navigation located west of the Proposed Development array area. These form the construction buoyage for NnG, and were deployed in May 2020, as confirmed by NLB during consultation. They are expected to be removed following the commissioning of the development, anticipated in November 2022 (EDF, 2020). Similarly, there is a group of 13 aids to navigation north of the Proposed Development array area that form the construction buoyage for Seagreen that were deployed in September 2021 and expected to be removed in September 2023 post-commissioning of the development.

The Inch Cape Met Mast and Bell Rock Lighthouse, both located west of the Proposed Development array area, also serve as aids to navigation.

7.4 Anchorage Locations

The majority of anchorage locations in the region are located within the Firth of Forth, where there are numerous designated anchorages and small vessel anchorages. Outside the Forth, there are designated anchorage points in close proximity to various coastal ports and harbours including off Dunbar, between St. Abbs and Eyemouth, off St. Andrews and in Lunan Bay to the south of Montrose.

The closest anchorage location to the Proposed Development array area is the designated anchorage point between St. Abbs and Eyemouth located approximately 19 nm to the south-west. The closest anchorage location to the Proposed Development export cable corridor is the designated anchorage off Dunbar located approximately 3.5 nm to the west of the Skateraw landfall location.

7.5 Military Practice and Exercise Areas

Military Practice and Exercise Areas (PEXA) close to the Proposed Development array area are presented in Figure 7.6.

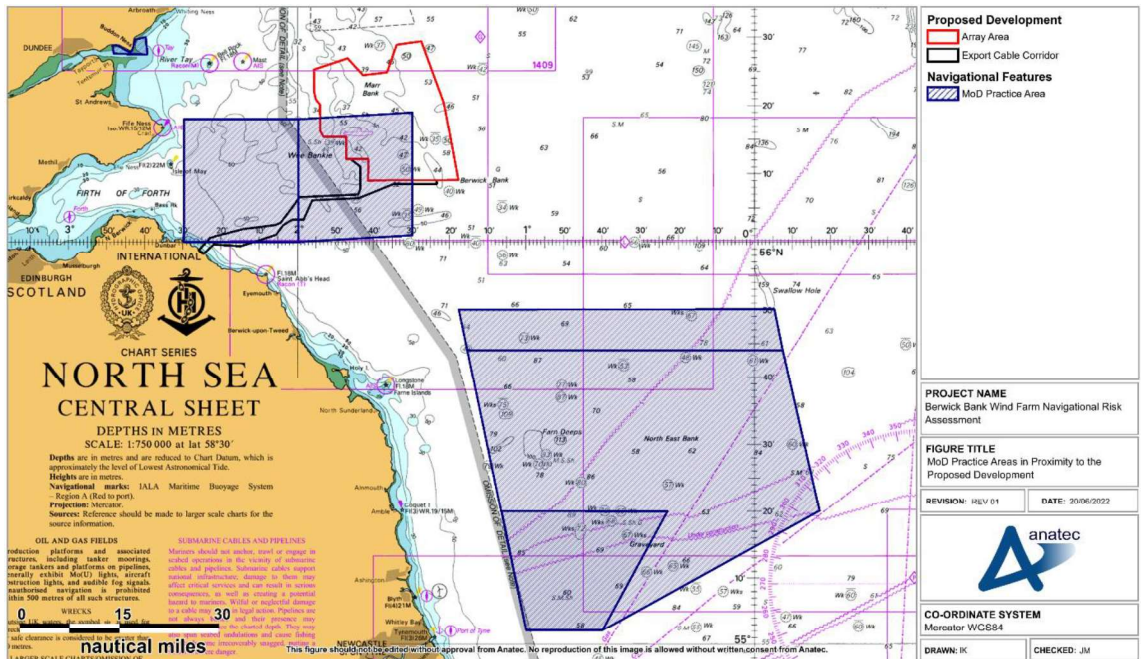


Figure 7.6 MoD Practice Areas in Proximity to the Proposed Development (Marine Scotland, 2019)

There are two MoD naval PEXAs located within the Outer Firth of Forth (X5641 and X5642), with area X5642 overlapping the Proposed Development array area. There is also a firing practice area off the Northumberland coast (Druridge Bay) located approximately 19 nm to the south of the Proposed Development array area, covering an area of approximately 2,300 nm².

In addition, there is a smaller firing range (Barry Buddo) located approximately 24 nm to the west of the Proposed Development array area, at the mouth of the River Tay.

No restrictions are placed on the right to transit a military PEXA at any time, although mariners are advised to exercise caution. Exercises and firing only occur when the area is considered to be clear of all shipping.

There are not anticipated to be any hazards to shipping and navigation users associated with military PEXAs, although military vessels are considered as part of the baseline characterisation of vessel traffic movements in section 10.

7.6 Charted Wrecks

A plot of charted wrecks is presented in Figure 7.7. Charted wrecks are those detailed on UKHO Admiralty Charts and are considered to pose a risk to surface navigation or subsea operations. Further details relating to wrecks are provided in volume 4, appendix 22 and the Marine Archaeology Technical Report which accompanies the Application.

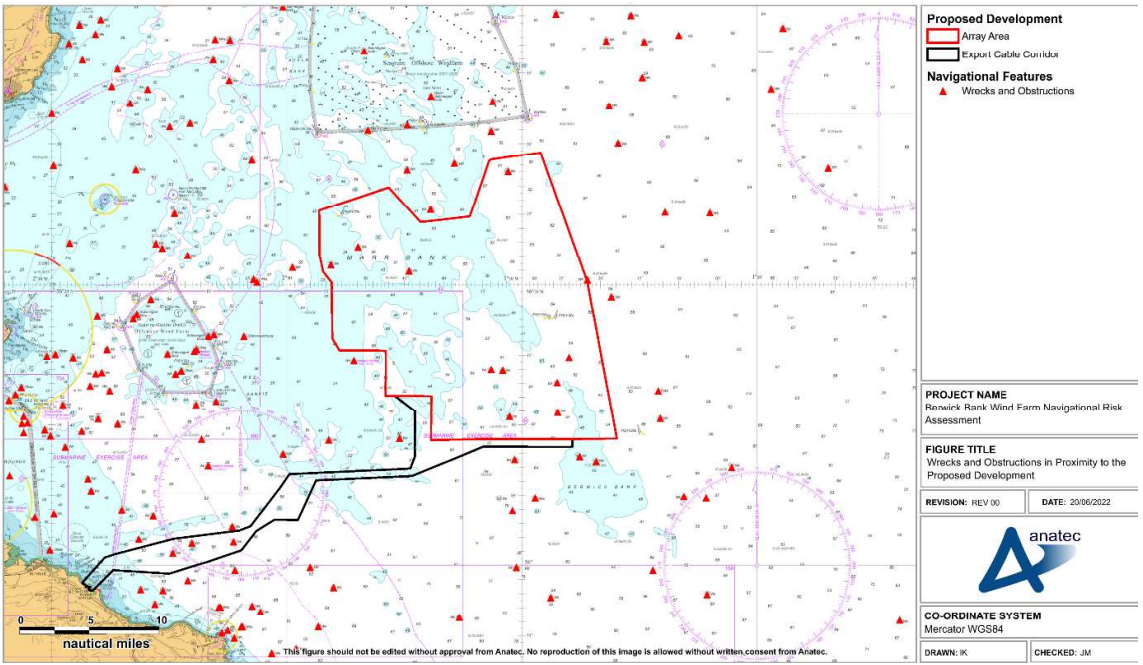


Figure 7.7 Wrecks and Obstructions in Proximity to the Proposed Development

There are 10 charted wrecks located within the Proposed Development array area, with the shallowest at 35 m below CD, in the north-west of the Proposed Development array area. There are three charted wrecks located within the Proposed Development export cable corridor, all in the nearshore area.

7.7 Other Features

7.7.1 International Maritime Organization Routeing Measures

There are no IMO routeing measures in the region.

7.7.2 Oil and Gas Infrastructure

There is no surface oil and gas infrastructure in the region, with the closest surface infrastructure the *BW Catcher* Floating Production Storage and Offloading (FPSO) at the

Catcher Area Development, located approximately 73 nm to the east of the Proposed Development array area.

There are some wellheads located in the region, with the closest an abandoned well located approximately 5.9 nm to the north of the Proposed Development array area. All other wells in the region are also abandoned.

7.7.3 Marine Aggregate Dredging Areas

There are no marine aggregate dredging areas in the region, noting that there are no marine aggregate dredging areas currently licensed in Scotland.

7.7.4 Spoil Grounds

There are two areas of spoil ground located approximately 20 nm west of the Proposed Development array area in the approaches to the Firth of Tay. There is also an area of spoil ground located approximately 1.5 nm from the Proposed Development export cable corridor, close to the Skateraw landfall location.

7.7.5 Ammunition Disposal Grounds

There are two ammunition disposal grounds (disused) located approximately 11 nm west of the Proposed Development array area immediately east of the Isle of May.

7.7.6 Submarine Cables and Pipelines

There are no existing submarine cables or pipelines in the region. The export cable associated with NnG is currently being installed and runs between the south-west of the Proposed Development array area and Thorntonloch, on the East Lothian coast. Likewise, the export cable associated with Seagreen is currently being installed and runs between the west of the Proposed Development array area and Carnoustie, on the Angus coast.

7.7.7 Marine Environment High Risk Areas

There is a Marine Environment High Risk Areas (MEHRA) for the Isle of May, located approximately 21 nm west of the Proposed Development at the entrance to the Firth of Forth. MEHRAs are areas along the UK coast designed to “inform [ships’] Masters of areas where there is a real prospect of a problem arising. This prime purpose stands alone and regardless of any consequential defensive measures” (Lord Donaldson, 1994).

8 Meteorological Ocean Data

This section presents meteorological and oceanographic statistics local to the Proposed Development. The data presented in this section had been used as input to the collision and allision risk modelling (see section 16).

8.1 Wind

Based on wind direction data modelled by Vortex at a nearby location and at 10 m height, the proportion of the wind direction within each 30-degree interval is presented in Figure 8.1 in the form of a wind rose. It can be seen that winds are predominantly from the west to the south.

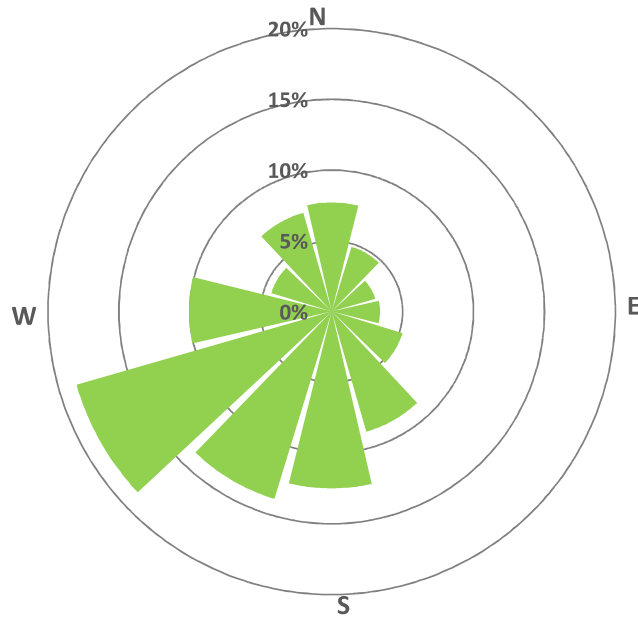


Figure 8.1 Wind Direction Distribution for Proposed Development

8.2 Wave

Based on significant wave height data recorded by Fugro between December 2010 and May 2012 at a location within the Proposed Development array area, the proportion of the sea state within each of three defined ranges, where the sea state is based upon significant wave height, is presented in Table 8.1. It should be noted that the percentages presented are rounded to one decimal place.

Table 8.1 Sea State Distribution for Proposed Development

Sea State	Proportion (%)
Calm (<1 m)	29.9
Moderate (1 to 5 m)	70.0
Severe (≥5 m)	0.2

8.3 Visibility

Based on information provided in the Admiralty Sailing Directions (UKHO, 2021), the proportion of poor visibility (defined as the proportion of a year where the visibility can be expected to be less than 1 km) is 3%.

8.4 Tide

From UKHO Admiralty Chart 1407, currents within and in proximity to the Proposed Development are set in a generally north to south direction on the flood tide and north to south direction on the ebb tide. The greatest peak flood tidal rate is 1.4 knots (kt) and the greatest peak ebb tidal rate is also 1.4 kt. The peak speed and corresponding direction data for the flood and ebb tides for the relevant tidal diamonds on UKHO Admiralty Chart 1407 are presented in Table 8.2

Table 8.2 Peak Flood and Ebb Tidal Data in Proximity to Proposed Development

Tidal Diamond (Chart 1407)	Flood Tide		Ebb Tide	
	Direction (°)	Peak Speed (knots)	Direction (°)	Peak Speed (knots)
A	186	1.4	007	1.4
B	191	1.2	016	1.2
C	183	0.9	013	0.8
E	199	1.1	032	1.2
H	176	1.0	356	1.1
L	169	0.9	352	0.9
N	203	0.8	026	0.8
R	292	0.7	108	0.6
S	182	0.6	001	0.7
T	342	0.7	138	0.6

Based upon the available data, no hazards are expected at high water that would not also be expected at low water, and vice versa. The wind farm structures are not expected to result in any additional risk on the existing tidal streams in relation to their effect on existing shipping and navigation users.

9 Emergency Response

This section summarises the existing Search and Rescue (SAR) resources in the region, and issues being considered in relation to the Proposed Development.

9.1 Search and Rescue Helicopters

In July 2022, the Bristow Group were awarded a new 10-year contract by the MCA (as an executive agency of the DfT) beginning in September 2024 to provide helicopter SAR operations in the UK. Bristow have been operating the service since April 2015.

The SAR helicopter service is currently operated out of 10 base locations around the UK, with the closest to the Proposed Development located at Inverness Airport, approximately 94 nm to the north-west. This base operates two AgustaWestland 189 (AW189) helicopters. As part of the new MCA contract, Bristow will also launch two new seasonal bases in Fort William and Carlisle, with the latter likely to be relevant to the Proposed Development.

Of particular note to the Proposed Development array area and export cable corridor is the Prestwick SAR helicopter base 100 nm west of the Proposed Development array area, from which all SAR helicopter taskings in the Proposed Development export cable corridor departed from (see section 9.1.2).

The DfT has produced data on civilian SAR helicopter activity in the UK by the Bristow Group on behalf of the MCA between April 2015 and March 2021.

9.1.1 Proposed Development Array Area

The locations of SAR helicopter taskings within the Proposed Development array area shipping and navigation study area is presented in Figure 9.1, colour-coded by tasking type.

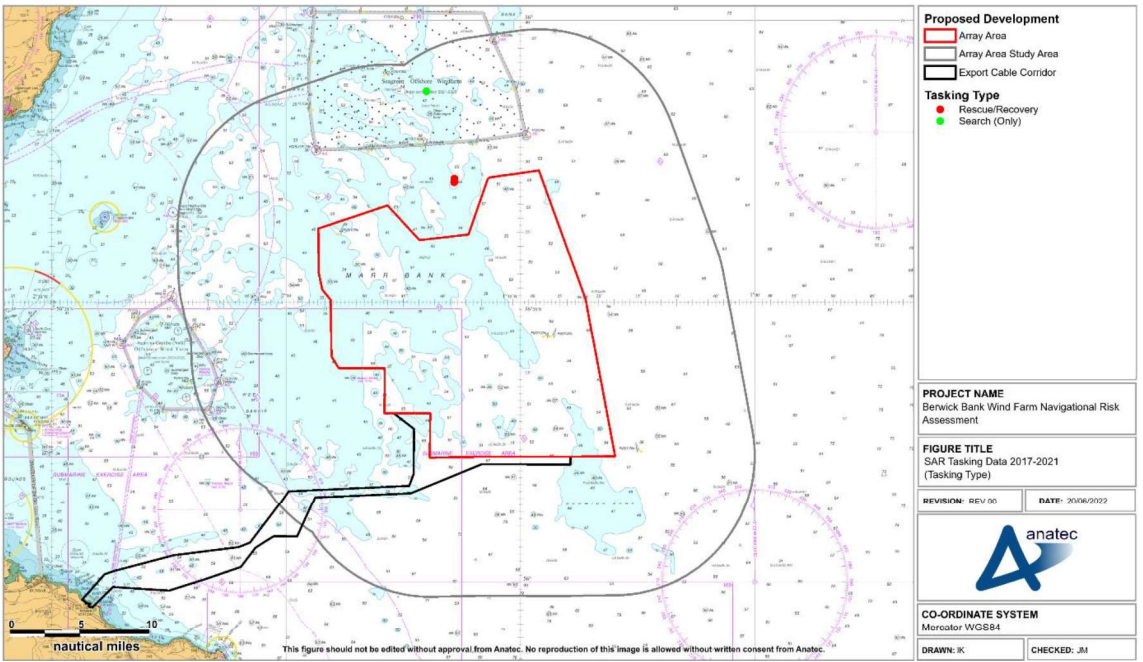


Figure 9.1 DfT SAR Helicopter Taskings Data within Proposed Development Array Area Shipping and Navigation Study Area by Type (2015 to 2021)

There were two unique SAR incidents in the Proposed Development array area shipping and navigation study area between April 2015 and March 2021. Both taskings originated from the Inverness base with one involving a rescue/recovery and one involving a search only. The rescue/recovery tasking was supported and completed. The search-only tasking was complete with no casualties found. No SAR incidents were recorded within the Proposed Development array area itself.

9.1.2 Proposed Development Export Cable Corridor

The locations of SAR helicopter taskings within the Proposed Development export cable corridor shipping and navigation study area is presented in Figure 9.2, colour-coded by tasking type.

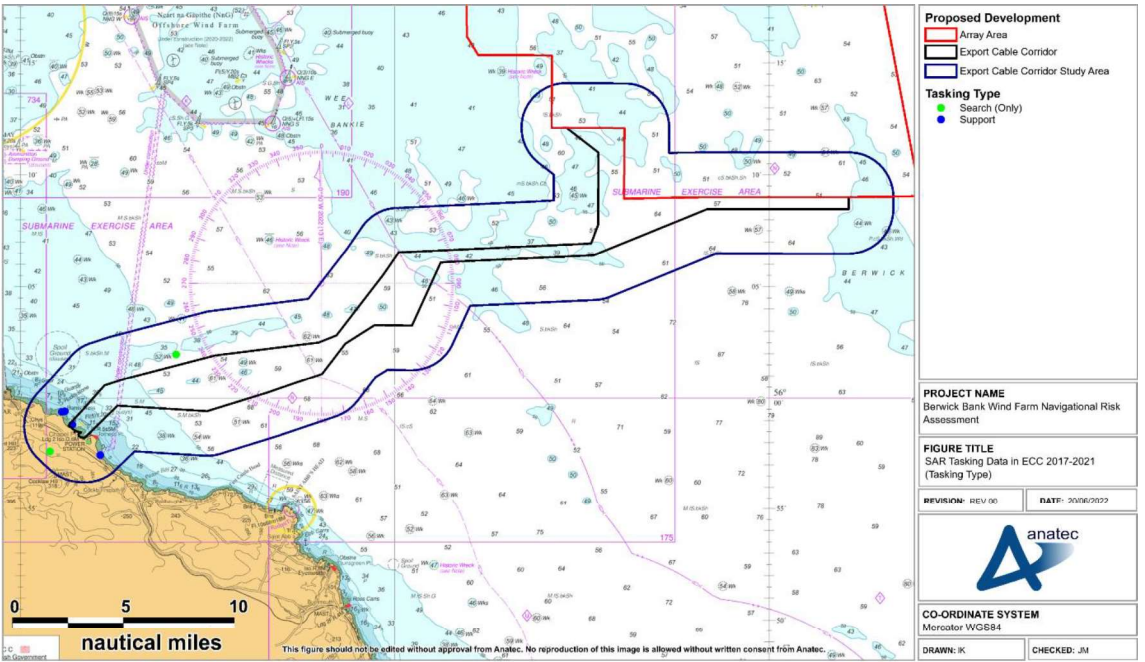


Figure 9.2 DfT SAR Helicopter Taskings Data within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Type (2015 to 2021)

There were six SAR incidents in the Proposed Development export cable corridor shipping and navigation study area between April 2015 and March 2021. All six taskings originated from the Prestwick base. Only one incident was maritime, with three being coastal, and the other two being land-based. The maritime tasking involved a rescue/recovery and was terminated on scene.

9.2 Royal National Lifeboat Institution

The RNLI is organised into six divisions, with the relevant region for the Proposed Development being 'Scotland'. Based out of more than 230 stations around the UK, there are over 400 active lifeboats across the RNLI fleet, including both all-weather lifeboats (ALB) and inshore lifeboats (ILB). RNLI lifeboats are available on a 24-hour basis throughout the year.

The closest RNLI station to the Proposed Development array area is at Eyemouth, located approximately 19 nm to the south-west, where both an ALB and ILB are in use. It is noted that the RNLI have a strategic performance standard of reaching casualties up to a maximum of 100 nm offshore.

As noted in section 9.2, the RNLI have a strategic performance standard of reaching casualties up to a maximum of 100 nm offshore.

The locations of incidents responded to by the RNLI within the Proposed Development array area shipping and navigation and export cable corridor study areas between 2010 and 2019 are presented in Figure 9.3, colour-coded by incident type. The same data is presented in

Figure 9.4, colour-coded by casualty type. It is noted that hoaxes and false alarms have been excluded from the analysis.

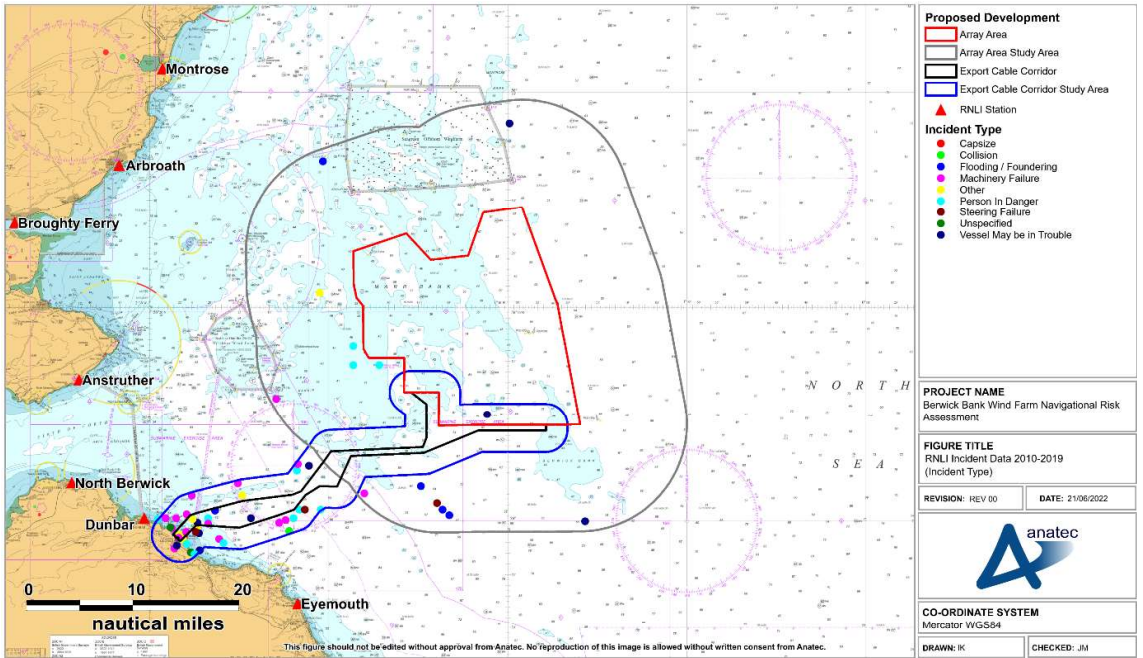


Figure 9.3 RNLI Incident Data within Proposed Development Array Area Shipping and Navigation and Export Cable Corridor Study Areas by Incident Type (2010 to 2019)

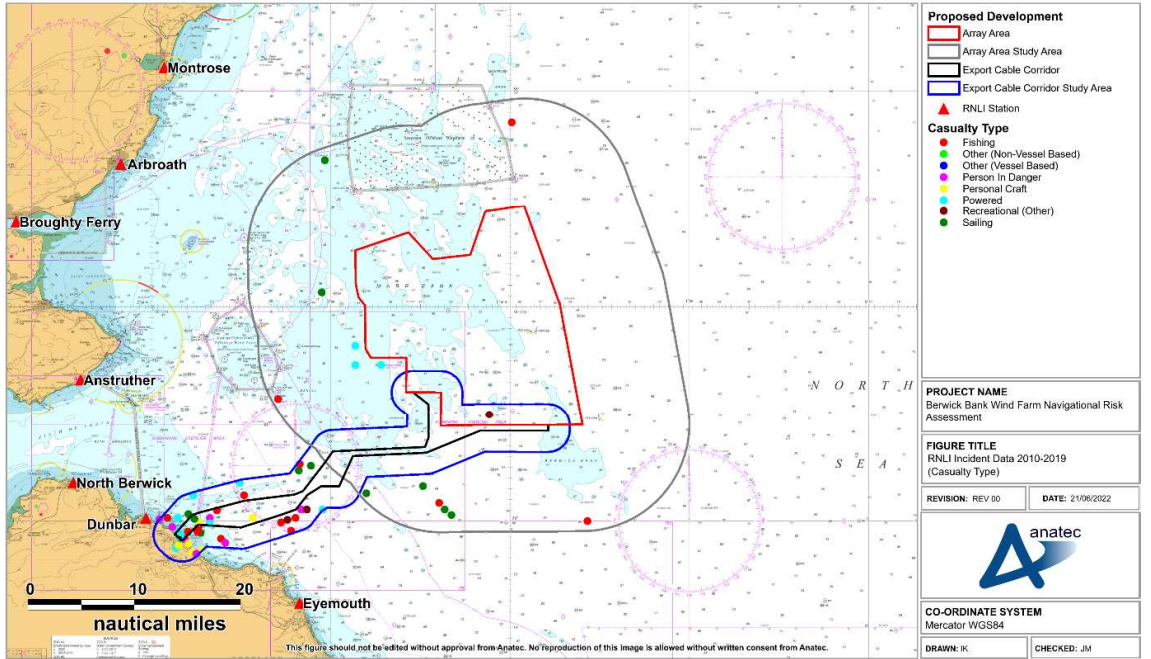


Figure 9.4 RNLI Incident Data within Proposed Development Array Area Shipping and Navigation and Export Cable Corridor Study Areas by Casualty Type (2010 to 2019)

A total of 14 RNLI lifeboat launches to 11 unique incidents were reported within the Proposed Development array area shipping and navigation study area, corresponding to an average of one unique incident per year. Incidents were primarily located inshore of the Proposed Development array area.

Of the 14 unique incidents in the Proposed Development array area shipping and navigation study area, the most frequently recorded incident types were flooding/foundering and vessel may be in trouble (27% each). The other incident types recorded were machinery failure (18%), other (9%), person in danger (9%), and steering failure (9%).

Of the 14 unique vessels related to the recorded incidents in the Proposed Development array area shipping and navigation study area, the most frequently recorded casualties were recreational sailing vessels (45%) and fishing vessels (36%).

There was one incident recorded within the Proposed Development array area itself, involving an 'other recreational' vessel which may be in trouble.

The most common base stations recorded for lifeboat launches for incidents in the Proposed Development array area shipping and navigation study area was Eyemouth (45%) followed by Dunbar (18%) and Montrose (18%). Lifeboat launches were also reported out of the stations at Arbroath and Stonehaven.

A total of 65 RNLI lifeboat launches to 48 unique incidents were reported within the Proposed Development export cable corridor shipping and navigation study area, corresponding to an

average of approximately five unique incidents per year. Incidents were primarily located close to the shoreline.

Of the 48 unique incidents in the Proposed Development export cable corridor shipping and navigation study area, the most frequently recorded incident types were machinery failure (36%) and person in danger (20%). Other recorded incident types included vessel may be in trouble (18%), collision (4%), steering failure (4%), capsized (2%), and flooding/foundering (2%). Incidents classed as ‘other’ comprised 13% of all unique incidents in the Proposed Development export cable corridor shipping and navigation study area. Incidents where the type was unspecified were not included in this analysis.

Of the 48 unique incidents in the Proposed Development export cable corridor shipping and navigation study area, recorded casualty types included fishing vessels (25%), powered recreational vessels (21%), person in danger (17%), personal craft (17%), sailing recreational vessels (10%), other recreational vessels (6%), other (non-vessel based) (2%), and other (vessel based) (2%).

There were nine incidents recorded within the Proposed Development export cable corridor itself, corresponding to approximately one incident per year. Of these incidents, the most frequently recorded incident types were machinery failure and vessel may be in trouble (22% each). Incidents where the type was unspecified were not included in this analysis. The most frequently recorded casualty types were personal craft (33%), fishing vessels (22%), and powered recreational vessels (22%).

The base station recorded for lifeboat launches for incidents in the Proposed Development export cable corridor shipping and navigation study area was Dunbar.

9.3 Maritime Rescue Coordination Centres and Joint Rescue Coordination Centres

Her Majesty’s Coastguard (HMCG), a division of the MCA, is responsible for requesting and tasking SAR resources made available to other authorities and for coordinating the subsequent SAR operations (unless they fall within military jurisdiction).

The HMCG coordinates SAR operations through a network of 11 Maritime Rescue Coordination Centres (MRCC), including a Joint Rescue Coordination Centre (JRCC) based in Hampshire.

All of the MCA’s operations, including SAR, are divided into three geographical regions. The ‘Scotland’ region covers the area encompassing the Proposed Development.

Each region is divided into six districts with its own MRCC, which coordinates the SAR response for maritime and coastal emergencies within its own district boundaries. The closest MRCC to the Proposed Development is at Aberdeen, located approximately 40 nm north of the Proposed Development array area.

9.4 Global Maritime Distress and Safety System

The Global Maritime Distress and Safety System (GMDSS) is a maritime communications system used for emergency and distress messages, vessel to vessel routing communications and vessel to shore routine communications. It is implemented globally and vessels engaged in international voyages are obliged to carry GMDSS certified communication equipment.

There are four GMDSS sea areas, and in the UK, it is the responsibility of the MCA to ensure Very High Frequency (VHF) coverage from coastal stations within sea area A1. The Proposed Development is located within an A1 sea area, as shown in Figure 9.5, and therefore in the event of an emergency any vessel located in proximity to the Proposed Development would be able to contact HMCG via VHF.

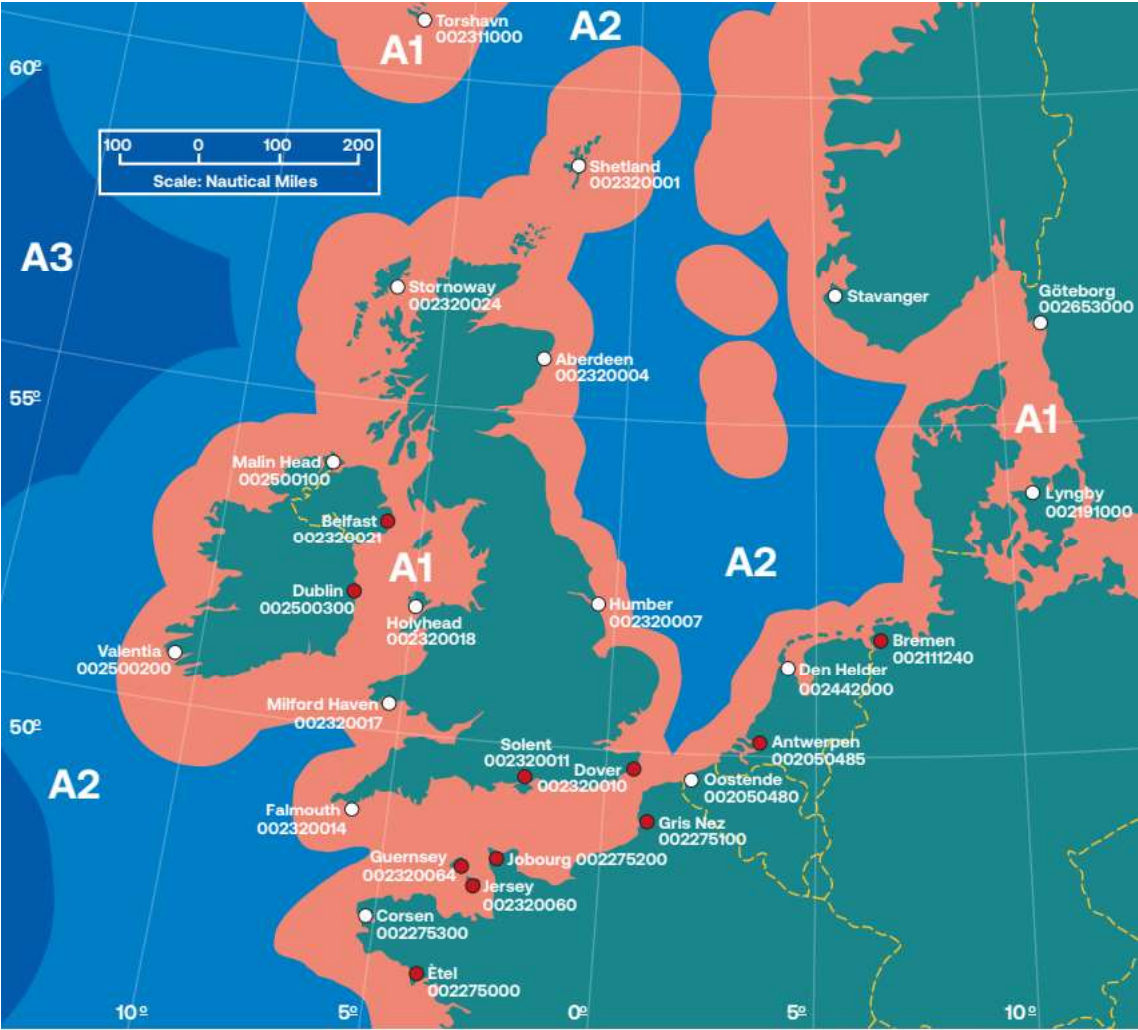


Figure 9.5 GMDSS Sea Areas (MCA, 2021)

9.5 Marine Accident Investigation Branch

All UK flagged vessels and non-UK flagged vessels in UK territorial waters (12 nm), a UK port, or carrying passengers to a UK port are required to report incidents to the MAIB.

The locations of accidents, injuries and hazardous incidents reported to the MAIB within the Proposed Development array area shipping and navigation and export cable corridor study areas between 2010 and 2019 are presented in Figure 9.6, colour-coded by incident type. The same data is presented in Figure 9.7, colour-coded by vessel type.

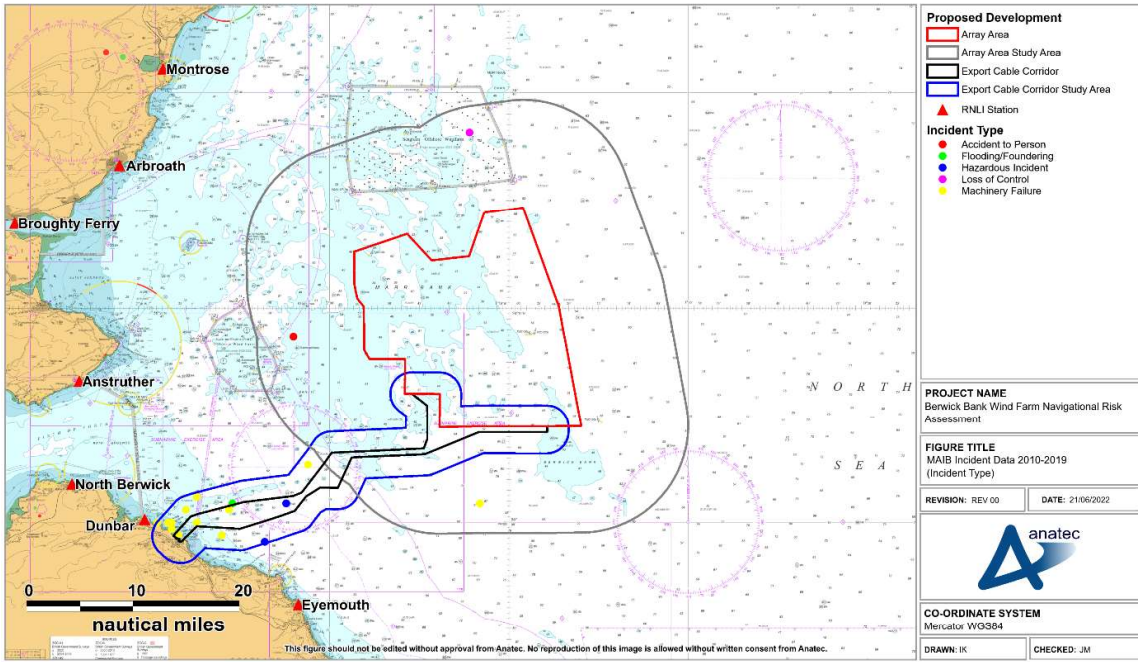


Figure 9.6 MAIB Incident Data within Proposed Development Array Area Shipping and Navigation and Export Cable Corridor Study Areas by Incident Type (2010 to 2019)

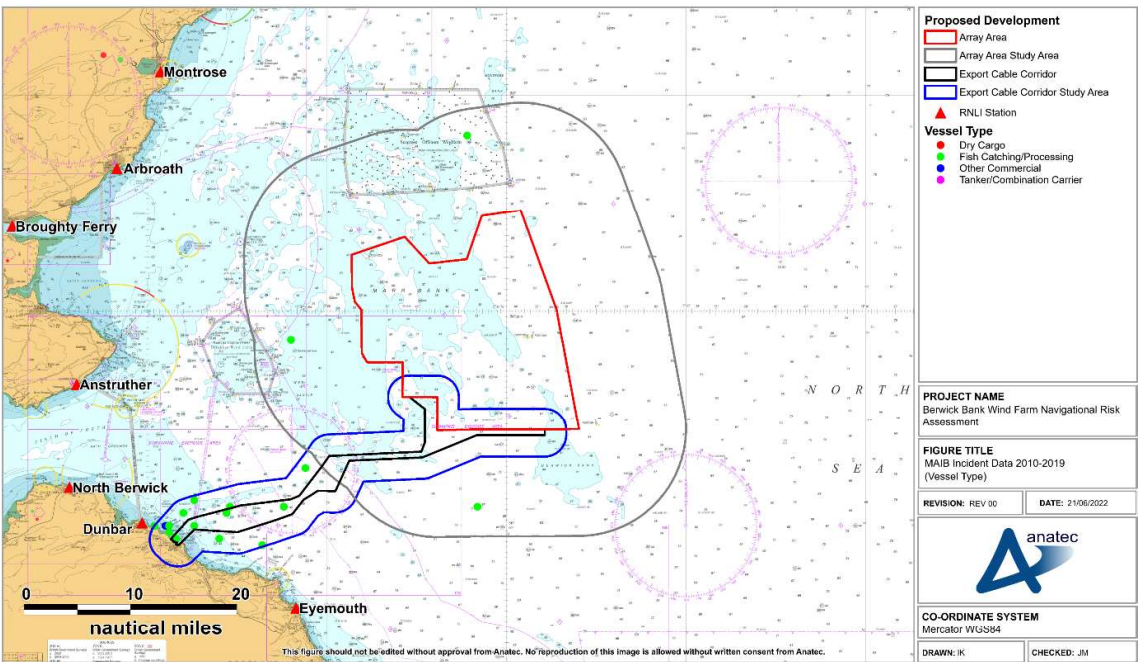


Figure 9.7 MAIB Incident Data within Proposed Development Array Area Shipping and Navigation and Export Cable Corridor Study Areas by Vessel Type (2010 to 2019)

A total of three unique incidents were reported to the MAIB within the Proposed Development array area shipping and navigation study area, corresponding to an average of approximately one incident every three years. Two of these incidents occurred inshore of the Proposed Development array area with the other occurring north of the Proposed Development array area. No incidents were reported to the MAIB within or offshore of the Proposed Development array area, with the closest reported approximately 5 nm west of the Proposed Development array area.

Of the three incidents, there was one instance each of machinery failure, loss of control, and accident to person. All three incidents involved a fishing vessel. None of the incidents required the incident vessel to be towed or salvaged. There was one injury recorded, but no fatalities occurred.

A review of older MAIB incident data within the Proposed Development array area shipping and navigation study area between 2000 and 2009 indicates that the number of incidents has decreased over time, with four unique incidents recorded in the ten-year period, corresponding to an average of one incident every two to three years. Of the recorded incidents, all four incident types were machinery failure. Three of the vessels involved were fish catching/processing, with the other being a tanker.

A total of 14 unique incidents were reported to the MAIB within the Proposed Development export cable corridor shipping and navigation study area, corresponding to an average of approximately one to two incidents every year. Two of these incidents involved two vessels,

resulting in a total of 16 vessels involved in incidents. Incidents were primarily located close to the shoreline.

Of the 14 unique incidents in the Proposed Development export cable corridor shipping and navigation study area, the most frequently recorded incident type was machinery failure (79%). The other two incident types recorded were hazardous incidents (14%) and flooding/foundering (7%).

Of the 16 vessels involved in the incidents in the Proposed Development export cable corridor shipping and navigation study area, the most frequently recorded vessel type was fishing vessels (81%).

There were four incidents recorded within the Proposed Development export cable corridor itself, all of which occurred close to the shoreline. Three of these incidents related to machinery failure for a fishing vessel with the other related to a hazardous incident between a tanker and a fishing vessel. None of the incidents required the incident vessel to be towed or salvaged. There were no injuries or fatalities noted for any of the recorded incidents.

A review of older MAIB incident data within the Proposed Development export cable corridor shipping and navigation study area between 2000 and 2009 indicates that the number of incidents has also decreased over time, with 18 unique incidents recorded in the ten-year period, corresponding to an average of just under two incidents every year. There were two instances of hazardous incidents between two vessels – one between a dry cargo vessel and fish catching/processing vessel, and another between a passenger cargo vessel and fish catching/processing vessel. Of the total recorded incidents in the Proposed Development export cable corridor, incident types were primarily machinery failure (72%), with hazardous incidents (22%) and accident to person (6%) also noted. Vessel types primarily involved included fish catching/processing (70%) and dry cargo (10%).

9.6 Historical Offshore Wind Farm Incidents

As of August 2022, there are 41 fully commissioned and generating offshore wind farms in the UK, ranging from the North Hoyle Offshore Wind Farm (fully commissioned in 2003) to Triton Knoll Offshore Wind Farm (fully commissioned in 2022). These developments consist of approximately 18,850 fully operational wind turbine years.

9.6.1 Incidents Involving UK Offshore Wind Farm Developments

MAIB incident data has been used to collate a list of historical collision and allision incidents involving UK offshore wind farm developments, which are summarised in Table 9.1. Other sources have also been used to produce this list including the UK Confidential Human Factors Incident Reporting Programme (CHIRP) for Aviation and Maritime, International Marine Contractors Association (IMCA) and basic web searches. This list is limited to collision and allision incidents given their specific relevance to shipping and navigation. Only incidents that have been formally reported are captured.

The worst consequences reported for vessels involved in a collision or allision incident involving a UK offshore wind farm development have been related to minor flooding, with no life-threatening injuries to persons reported.

As of August 2022, there have been no collisions as a result of the presence of an offshore wind farm in the UK. The only reported collision incident in relation to a UK offshore wind farm involved a project vessel hitting a third-party vessel whilst in harbour.

As of August 2022, there have been 13 reported⁶ cases of an allision between a vessel and a wind turbine (under construction, operational or disused) in the UK, with all but two involving a support vessel for the development and the errant vessel in each case under power rather than drifting. Therefore, there has been an average of 1,570 years of wind turbine operation per wind turbine allision incident in the UK. This is a conservative calculation given that only operational wind turbine years have been included (whereas allision incidents counted include non-operational wind turbines).

⁶ Reported to an accident investigation branch or an anonymous reporting service. Unconfirmed incidents have not been considered noting that to date only one further alleged incident has been rumoured but there is no evidence to confirm.

Table 9.1 Summary of Historical Collision and Allision Incidents Involving UK Offshore Wind Farm Developments

Incident Vessel	Incident Type	Date	Description of Incident	Vessel Damage*	Harm to Persons	Source
Project	Allision – project vessel with wind turbine	7 August 2005	A vessel involved with the installation of wind turbines underestimated the effect of the current and allided with the base of a wind turbine whilst manoeuvring alongside it. Minor damage was sustained to a gangway on the vessel, the wind turbine tower and a wind turbine blade.	Minor damage to gangway on the vessel	None	MAIB
Project	Allision – project vessel with wind turbine	29 September 2006	When approaching a wind turbine, an offshore services vessel was struck by the tip of a wind turbine blade which was rotating rather than secured in a fixed position.	None	None	MAIB
Project	Allision – project vessel with disused pile	8 February 2010	The Skipper on-board a work boat slipped their hand on the throttle controls whilst in proximity to a disused pile. There was insufficient time to correct the error and the vessel struck the pile. A passenger moving around the interior of the vessel was thrown off his feet. Although not known at the time, the passenger was later diagnosed with back injuries. No serious damage was caused to the vessel.	Minor	Injury	MAIB
Project	Collision – third party vessel with project vessel	23 April 2011	A third-party catamaran was hit by a project guard vessel within a harbour.	Moderate	None	MAIB

Incident Vessel	Incident Type	Date	Description of Incident	Vessel Damage*	Harm to Persons	Source
Project	Allision – project vessel with wind turbine	18 November 2011	The Officer of the Watch (OOW) on-board a cable-laying vessel fell asleep and woke to find the vessel inside a wind farm. He attempted to manoeuvre the vessel out of the wind farm on autopilot but the settings did not allow a quick turn and the vessel struck the foundations of a partially completed wind turbine. The vessel suffered two hull breaches.	Major	None	MAIB
Project	Collision – project vessel with service vessel	2 June 2012	A CTV became lodged under the boat landing equipment of a flotel. Nine persons were safely evacuated and transferred to a nearby vessel before being brought back into port.	Moderate	None	UK CHIRP
Project	Allision – project vessel with wind turbine	20 October 2012	The OOW misjudged the distance from a wind turbine monopile and made contact with the vessel's stern resulting in minor damage.	Minor	None	MAIB
Project	Allision – project vessel with buoy	21 November 2012	A wind farm passenger transfer catamaran struck a buoy at high speed whilst supporting operation for an offshore wind farm. The vessel was abandoned by the crew of 12 with the vessel having been holed, causing extensive flooding. There were however no injuries. It was found that the Master had unknowingly altered the vessel's course and had not been formally assessed to determine his suitability for the role.	Major	None	MAIB

Incident Vessel	Incident Type	Date	Description of Incident	Vessel Damage*	Harm to Persons	Source
Project	Allision – project vessel with wind turbine	21 November 2012	A work boat allided with the unlit transition piece of a wind turbine at moderate speed. The impact caused all five persons on-board to be forced out of their seats. The vessel was able to proceed to port unassisted with no water ingress incurred, although there was some structural damage. It was found that the vessel's Master had relied too heavily on visual cues and there had been insufficient training with navigation equipment. The wind turbine transition piece had been reported as unlit although the defect reporting system had failed to promulgate a navigation warning.	Moderate	None	MAIB
Project	Allision – project vessel with wind turbine	1 July 2013	After disembarking passengers at an offshore substation, a service vessel's jets were disengaged, but the vessel jet drive suffered a failure which resulted in an allision with a wind turbine foundation. The vessel suffered some damage whereas the wind turbine foundation was not damaged.	Minor	None	IMCA Safety Flash
Project	Allision – project vessel with wind turbine	14 August 2014	A standby safety vessel allided with a wind turbine pile and consequently leaked marine gas oil and a surface sheen trailed from the vessel. Under its own power the vessel moved away from environmentally sensitive areas until the leak was stopped.	Minor with pollution	None	UK CHIRP
Third party	Allision – fishing vessel with wind turbine	26 May 2016	A crew member on-board a fishing vessel left the autopilot on, resulting in an allision with a wind turbine. A lifeboat attended the incident.	Moderate	Injury	Web search (RNLI, 2016)

Incident Vessel	Incident Type	Date	Description of Incident	Vessel Damage*	Harm to Persons	Source
Third party	Allision – fishing vessel with wind turbine	24 May 2018	A fishing vessel allided with a wind turbine within an under-construction wind farm.	Unknown	Unknown	Anatec in-house AIS data
Third party	Allision – recreational vessel with buoy	12 August 2018	A recreational vessel allided with a buoy associated with a tidal device, mistaking the light as being from a lighthouse located much further away. The vessel's mast was broken, and Radar reflector on the buoy lost.	Moderate	None	Anatec consultation meeting with a client (2021)
Project	Allision – project vessel with wind turbine jacket	14 February 2019	A vessel undertaking a survey at an offshore wind farm ran too close to a wind farm jacket whilst under autopilot.	Minor	None	MAIB
Project	Allision – project vessel with wind turbine	16 January 2020	A project vessel servicing a number of wind turbines allided with a wind turbine whilst transiting back to port resulting in a member of the crew coming into contact with the railings. The vessel proceeded unaided back to port where the man was subsequently taken to hospital to obtain doctors' advice.	None	Injury	Web search (Vessel Tracker, 2020)
Project	Allision – project vessel with wind turbine	27 January 2020	Project vessel allision with WTG. Minor damage to vessel and WTG sustained, with no personal injuries.	Minor	None	Marine Safety Forum
Third-party	Allision – fishing vessel with wind turbine	9 June 2022	Fishing vessel allision with WTG resulting in damage to vessel and two minor injuries for crew members. RNLI lifeboat escorted vessel under its own power to port.	Minor	Injury	Web search (RNLI, 2022)

*As per incident reports

9.6.2 Incidents Involving Non-UK Offshore Wind Farms

It is acknowledged that collision and allision incidents involving non-UK offshore wind farm developments have also occurred. However, it is not possible to maintain a comprehensive list of such incidents.

One high profile non-UK incident which is noted is that involving a bulk carrier in January 2022 which dragged anchor during a storm in Dutch waters and collided with another anchored vessel. The vessel began to take on water, leading to all crew members being evacuated by helicopter. The vessel then continued to drift towards shore including though an under construction offshore wind farm where it allided with a WTG foundation and a platform foundation before being taken under tow.

9.6.3 Incidents Responded to by Vessels Associated with UK Offshore Wind Farm Developments

A list has been collated from news reports, basic web searches and experience of working with existing offshore wind farm developments, of historical incidents responded to by vessels associated with UK offshore wind farm developments. This list is summarised in Table 9.2. It is noted that the initial causes of these incidents were not related to the associated offshore wind farms.

Table 9.2 comprises known incidents that were responded to by a wind farm vessel. Additional incidents associated with wind farms themselves are also known to have occurred. These incidents typically involve an accident to person which requires medical attention (including emergency response) but does not affect the operation of the vessel involved.

Table 9.2 Historical Incidents Responded to by Vessels Associated with UK Offshore Wind Farm Developments

Incident Type	Date	Related Development	Description of Incident	Source
Capsize	21 June 2018	Walney Offshore Wind Farm	HMCG issued mayday relay broadcast following trimaran capsize. Support vessel for Walney arrived and recovered two persons from the water who were then winched onboard a Coastguard helicopter.	Web search (4C Offshore, 2018)
Capsize	5 November 2018	Race Bank Offshore Wind Farm	Fishing vessel capsized resulting in two persons in the water. Vessel operating at the nearby Race Bank reported to have assisted with the rescue which also involved a Belgian military helicopter and the RNLI.	Web search (British Broadcasting Corporation (BBC), 2018)
Vessel in distress	15 May 2019	London Array Offshore Wind Farm	Yacht in difficult sought shelter by tying up to a WTG but suffered damage and a person in the water. Support vessel for London Array identified and secured the casualty vessel and recovered the person in the water. The support vessel raised the alarm to the Coastguard. The Coastguard later instructed the support vessel to return to port and seek medical assistance for the casualty vessel's occupant.	Web search (The Isle of Thanet News, 2019)

Incident Type	Date	Related Development	Description of Incident	Source
Drifting	7 July 2019	Gwynt y Môr Offshore Wind Farm	Speedboat suffered mechanical failure stranding four persons. Support vessel for Gwynt y Môr responded to an 'all-ships' broadcast from the Coastguard and prevented the casualty vessel drifting into the Gwynt y Môr array. The support vessel later towed the casualty vessel back towards port.	Web search (Renews, 2019)
Machinery failure	28 September 2019	Race Bank Offshore Wind Farm	Fishing vessel suffered mechanical failure and launched flares. Guard vessel and SOV for Race Bank both immediately offered assistance until the MCA's arrival on-scene.	Internal daily progress report received by Anatec
Vessel in distress	13 December 2019	Race Bank Offshore Wind Farm	Passing vessel got into difficulty and guard vessel for Race Bank was requested to assist. The Coastguard later requested that the guard vessel tow the casualty vessel into port.	Internal daily progress report received by Anatec
Search	21 May 2020	Walney Offshore Wind Farm	Coastguard contacted guard vessel for Walney reporting red flare sighting at the wind farm. Guard vessel proceeded to undertake search but did not find anything to report.	Internal daily progress report received by Anatec
Aircraft crash	15 June 2020	Hornsea Project One	United States (US) jet crashed into sea during routine flight. CTV and SOV for Hornsea Project One joined the search for the missing pilot.	Web search (4C Offshore, 2020)
Fire/explosion	15 December 2020	Dudgeon Offshore Wind Farm	Fishing vessel experienced explosions on board with crew injured. SOV for Dudgeon deployed its Fast Rescue Boat (FRB) and evacuated the casualty vessel.	Web search (Offshore WIND, 2020)
Vessel in distress	3 June 2021	Robin Rigg	Wind farm CTV fire alarm sounded, with the engine then shut down. A support vessel for Robin Rigg was able to assist in escorting the vessel to port.	Web search (Vessel Tracker, 2021)
Drifting	17 July 2021	Neart na Gaoithe	Small dinghy with two children aboard drifted offshore due to strong winds. A guard vessel associated with NNG was able to retrieve the children.	Web search (Edinburgh Evening News, 2021)
Allision	9 June 2022	Westermost Rough	Fishing vessel allided with a WTG at Westermost Rough. A supply vessel was among the responders as a RNLI lifeboat escorted the vessel under its own power to port.	Web search (Vessel Tracker, 2022)

10 Vessel Traffic Movements

This section presents an analysis of vessel traffic movements in relation to the Proposed Development array area and export cable corridor. The methodology for vessel traffic data collection, including details of the on-site vessel traffic surveys, is provided in section 5.2.

10.1 Proposed Development Array Area

A number of vessel tracks recorded during the Proposed Development array area survey periods were classified as temporary (non-routine), such as the tracks of the survey vessel, other non-routeing survey vessels and vessels associated with the construction of NnG and Seagreen. These have therefore been excluded from the analysis.

A plot of the vessel tracks recorded during a 14-day survey period in August 2022, colour-coded by vessel type and excluding temporary traffic, is presented in Figure 10.1. A plot of the vessel tracks recorded during a further 14-day survey period in January 2021, colour-coded by vessel type and excluding temporary traffic, is presented in Figure 10.2.

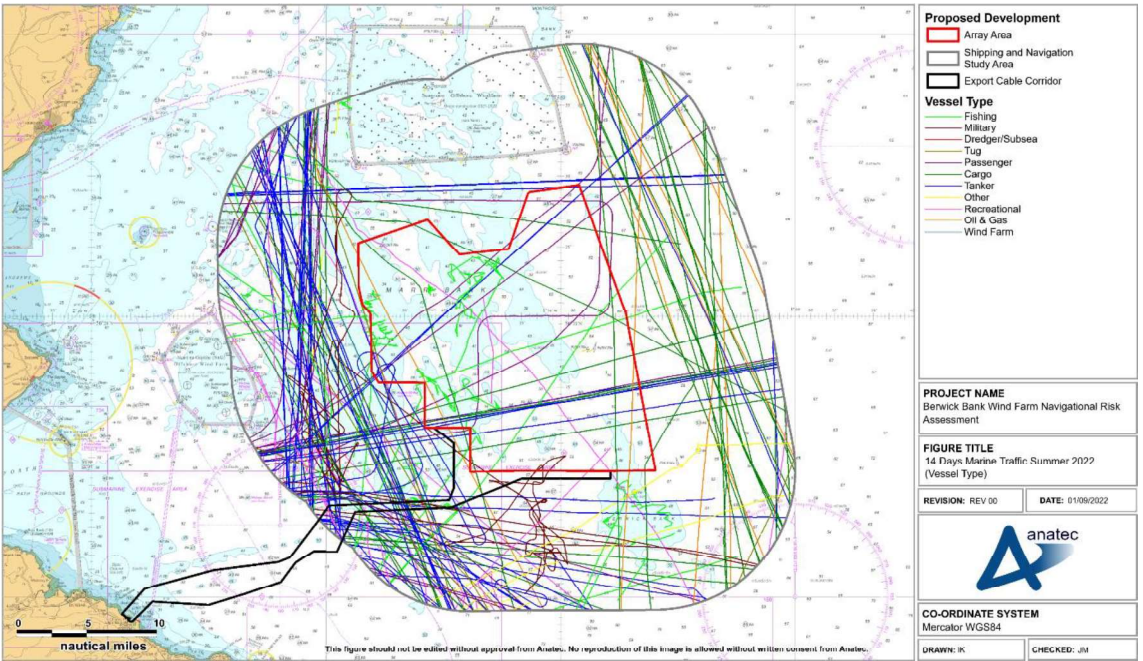


Figure 10.1 Vessel Traffic Movements within Proposed Development Array Area Shipping and Navigation Study Area by Vessel Type (14 Days Summer 2022)

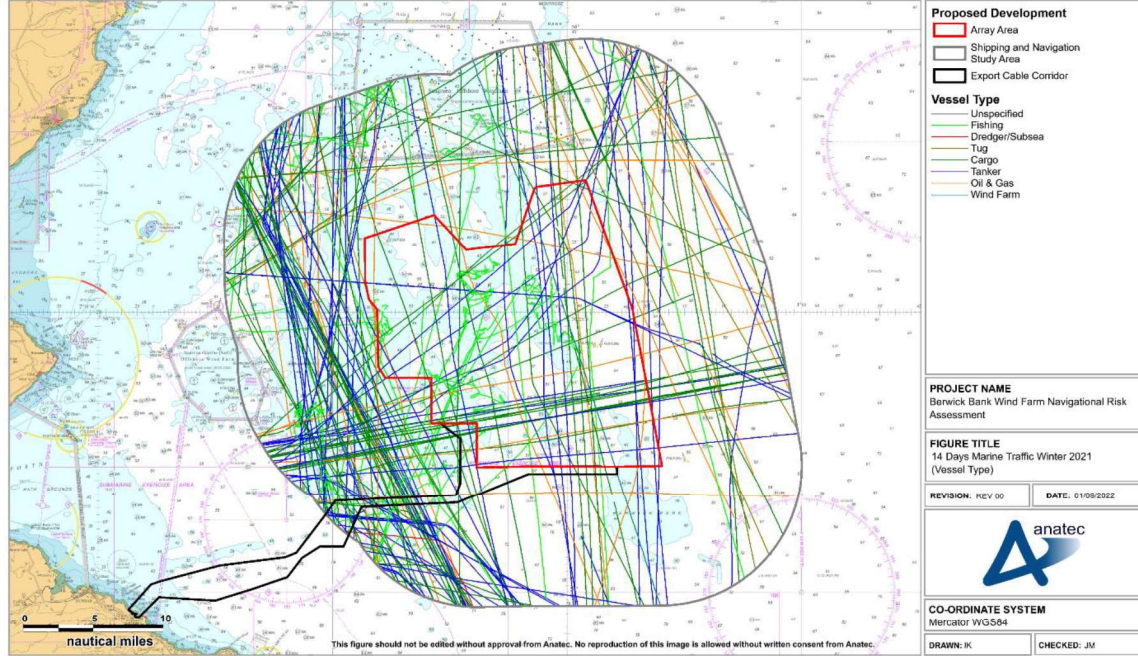


Figure 10.2 Vessel Traffic Movements within Proposed Development Array Area Shipping and Navigation Study Area by Vessel Type (14 Days Winter 2021)

Plots of the vessel tracks for the summer and winter survey periods converted to a density heat map are presented in Figure 10.3 and Figure 10.4, respectively. It can be seen that, during the summer period there is negligible vessel density where the Proposed Development array area overlaps Seagreen. In contrast, during the winter period (which predates the start of Seagreen construction) some vessel density was observed where the Proposed Development array area overlaps Seagreen.

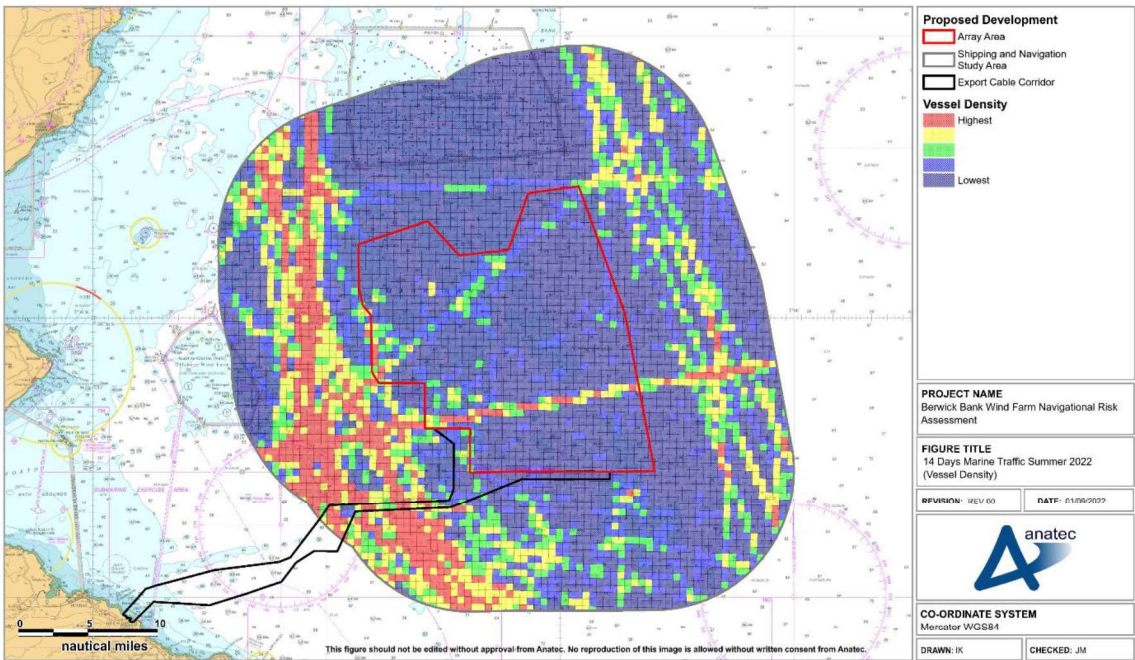


Figure 10.3 Vessel Density Heat Map within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2022)

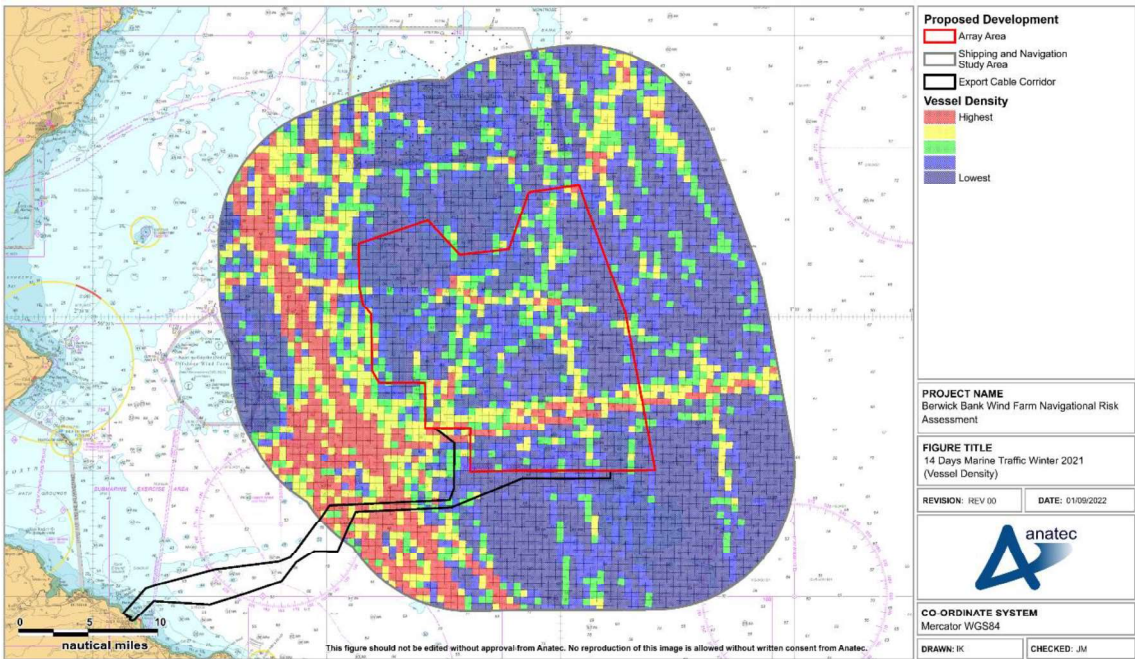


Figure 10.4 Vessel Density Heat Map within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Winter 2021)

10.1.1 Vessel Counts

For the 14 days analysed in the summer survey period, there was an average of 14 unique vessels per day recorded within the Proposed Development array area shipping and navigation study area. In terms of vessels intersecting the Proposed Development array area itself, there was an average of three to four unique vessels per day.

The daily number of unique vessels recorded within the Proposed Development array area shipping and navigation study area and the Proposed Development array area itself during the summer survey period are presented in Figure 10.5. Since the survey commenced and concluded midway through the first and last days of the summer survey period (as described in section 5.2), the first and last days are partial.

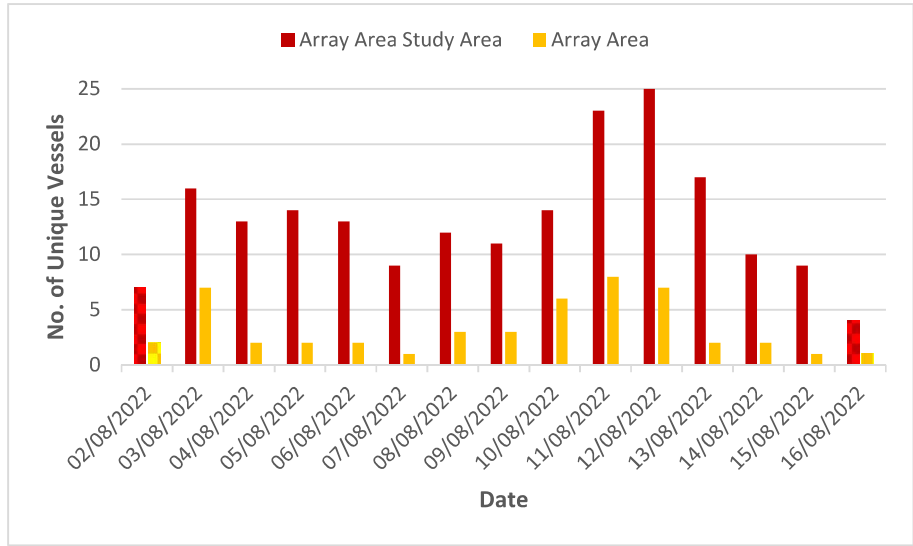


Figure 10.5 Unique Vessels per Day within the Proposed Development Array Area and Shipping and Navigation Study Area (14 Days Summer 2022)

Throughout the summer survey period, approximately 25% of unique vessel tracks recorded within the Proposed Development array area shipping and navigation study area intersected the Proposed Development array area itself.

The busiest day recorded within the Proposed Development array area shipping and navigation study area throughout the summer survey period was 12 August when 25 unique vessels were recorded. The busiest days recorded within the Proposed Development array area itself throughout the summer survey period was 11 August when eight unique vessels were recorded.

The quietest full days recorded within the Proposed Development array area shipping and navigation study area throughout the summer survey period were 7 August and 1 August when nine unique vessels were recorded each. The quietest full days recorded within the Proposed Development array area itself throughout the summer survey period were 7 August and 15 August when one unique vessel was recorded each.

For the 14 days analysed in the winter survey period, there was an average of 14 unique vessels per day recorded within the Proposed Development array area shipping and navigation study area. In terms of vessels intersecting the Proposed Development array area itself, there was an average of five unique vessels per day.

The daily number of unique vessels recorded within the Proposed Development array area shipping and navigation study area and the Proposed Development array area itself during the winter survey period are presented in Figure 10.6.

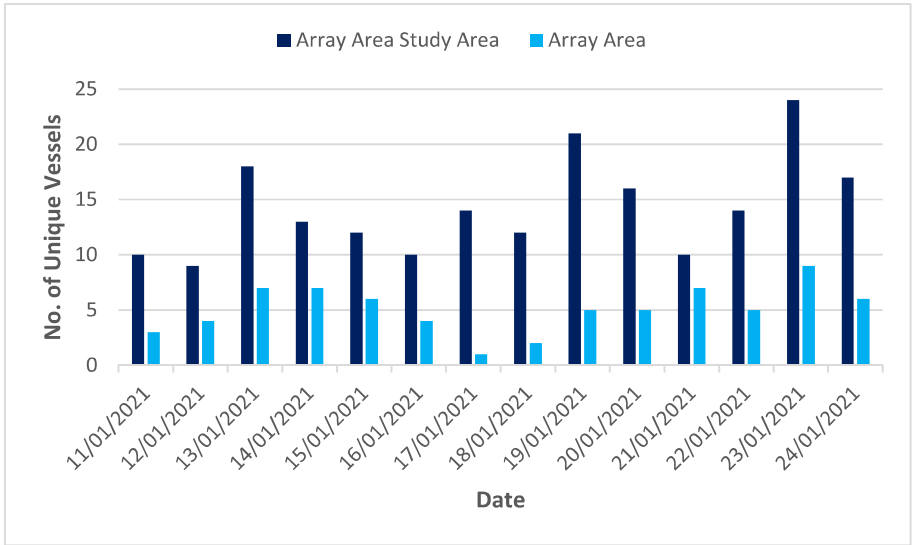


Figure 10.6 Unique Vessels per Day within Proposed Development Array Area and Shipping and Navigation Study Area (14 Days Winter 2021)

Throughout the winter survey period approximately 36% of unique vessel tracks recorded within the Proposed Development array area shipping and navigation study area intersected the Proposed Development array area itself.

The busiest day recorded within the Proposed Development array area shipping and navigation study area throughout the winter survey period was 23 January when 24 unique vessels were recorded. The busiest day recorded within the Proposed Development array area itself throughout the winter survey period was also 23 January when nine unique vessels were recorded.

The quietest day recorded within the Proposed Development array area shipping and navigation study area throughout the winter survey period was 12 January when nine unique vessels were recorded. The quietest day recorded within the Proposed Development array area itself throughout the winter survey period was 17 January when one unique vessel was recorded.

10.1.2 Vessel Types

The percentage distribution of the main vessel types recorded within the Proposed Development array area shipping and navigation study area and the Proposed Development array area itself is presented in Figure 10.7.

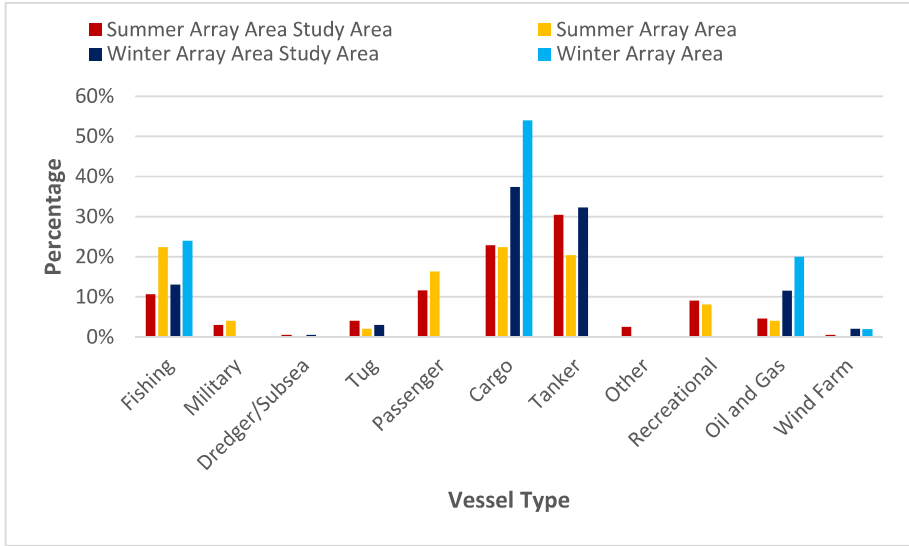


Figure 10.7 Vessel Type Distribution within Proposed Development Array Area and Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Throughout the summer period, the most common vessel types in the Proposed Development array area shipping and navigation study area were tankers (30%), cargo vessels (23%), and passenger vessels (12%). Throughout the winter period, the most common vessel types were cargo vessels (37%), tankers (32%), and fishing vessels (13%).

It is noted that no commercial ferries were identified in the winter vessel traffic survey data, which aligns with feedback provided by Forth Ports during consultation (see 10 June 2020 entry in Table 4.1).

10.1.2.1 Cargo Vessels

The tracks of cargo vessels recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2022 survey period are presented in Figure 10.8. Following this, the tracks of cargo vessels recorded within the Proposed Development array area shipping and navigation study area throughout the winter 2021 survey period are presented in Figure 10.9.

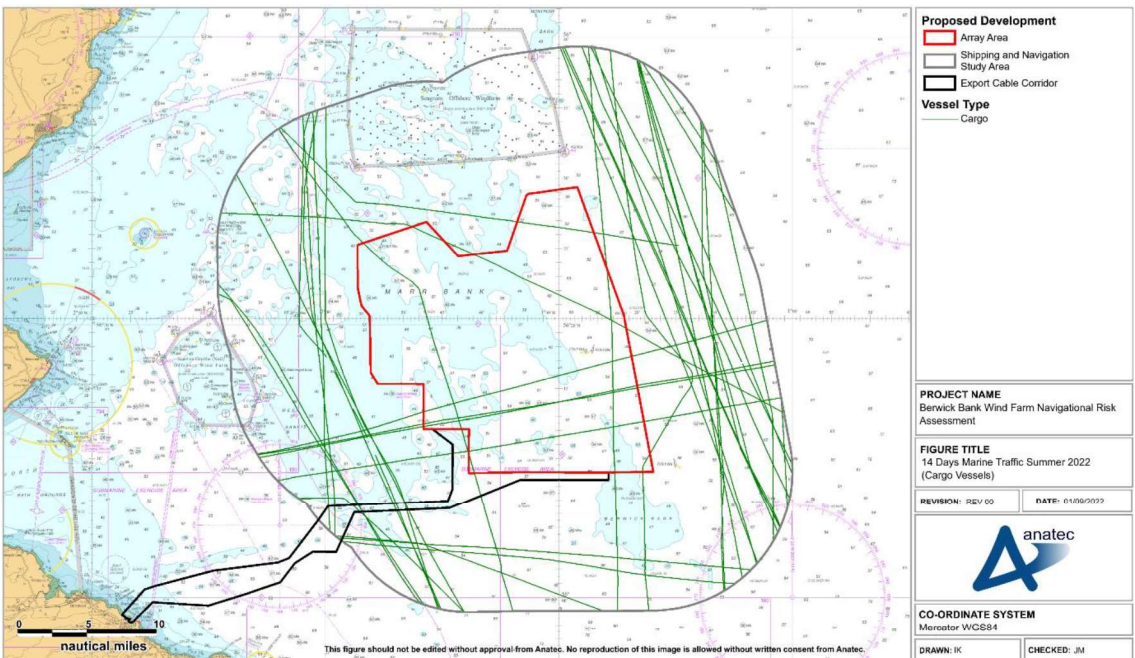


Figure 10.8 Cargo Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2022)

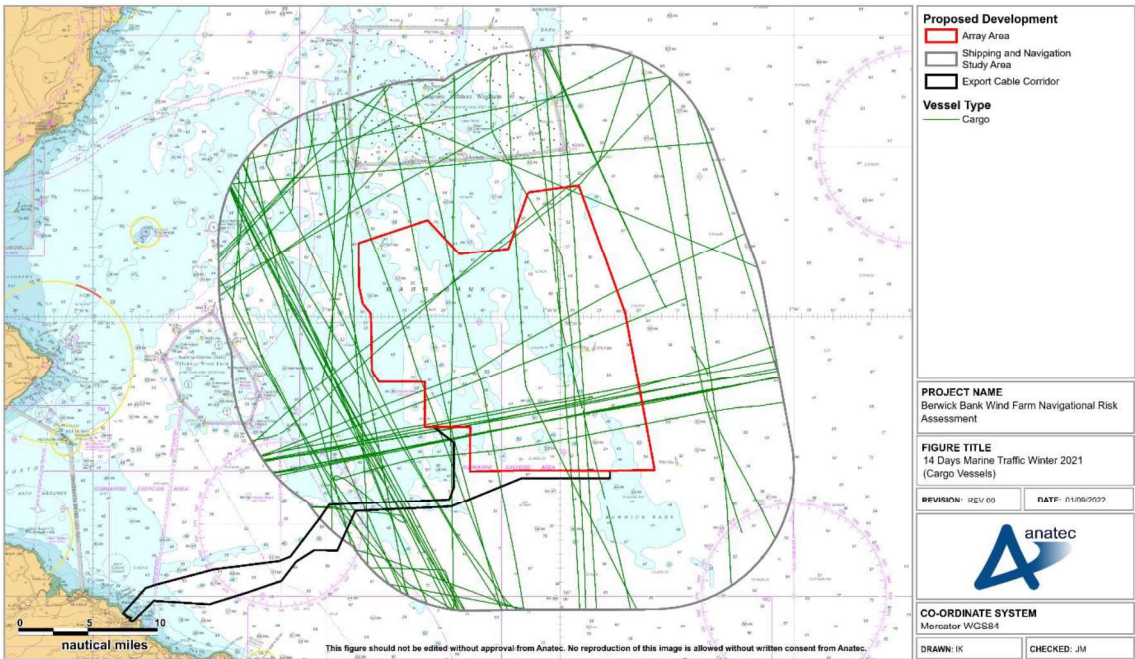


Figure 10.9 Cargo Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Winter 2021)

Throughout the survey periods an average of four unique cargo vessels per day were recorded within the Proposed Development array area shipping and navigation study area. Regular

cargo vessel routing included north-south following the UK east coast, north-west-south-east out of Montrose and east-west out of the Firth of Forth. Cargo vessels avoided the Seagreen buoyed construction area during the summer period.

The majority of cargo vessels recorded within the Proposed Development array area shipping and navigation study area were general cargo (79%). Other subtypes included bulk carriers (10%) and containerships (8%).

10.1.2.2 Tankers

The tracks of tankers recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2022 survey period are presented in Figure 10.10. Following this, the tracks of tankers recorded within the Proposed Development array area shipping and navigation study area throughout the winter 2021 survey period are presented in Figure 10.11.

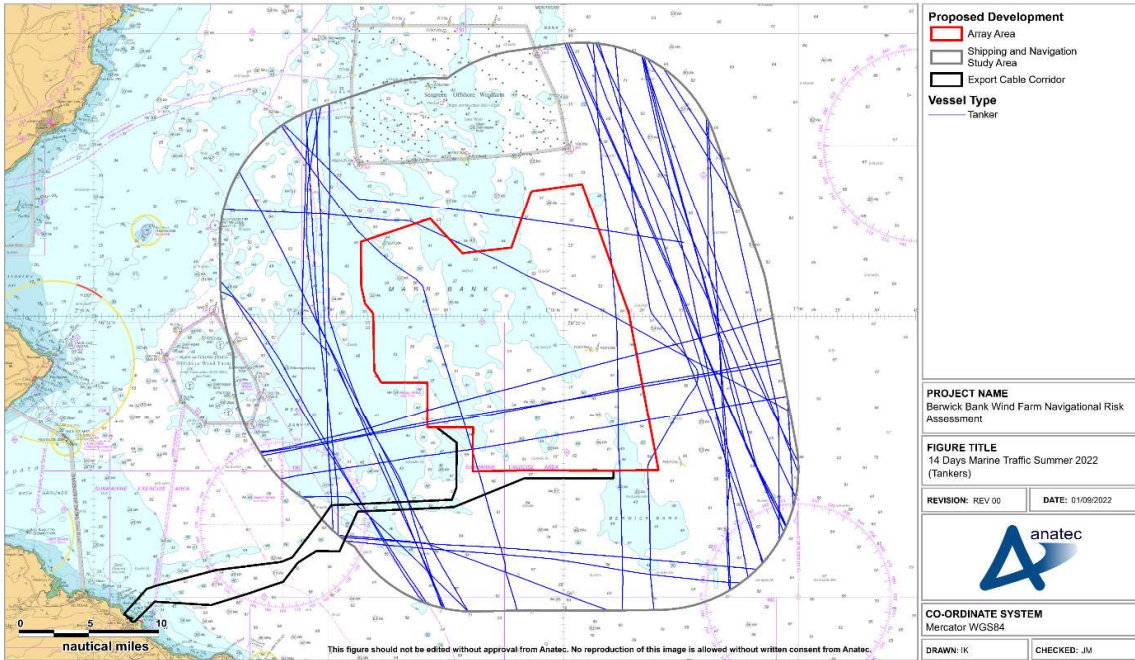


Figure 10.10 Tanker Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2022)

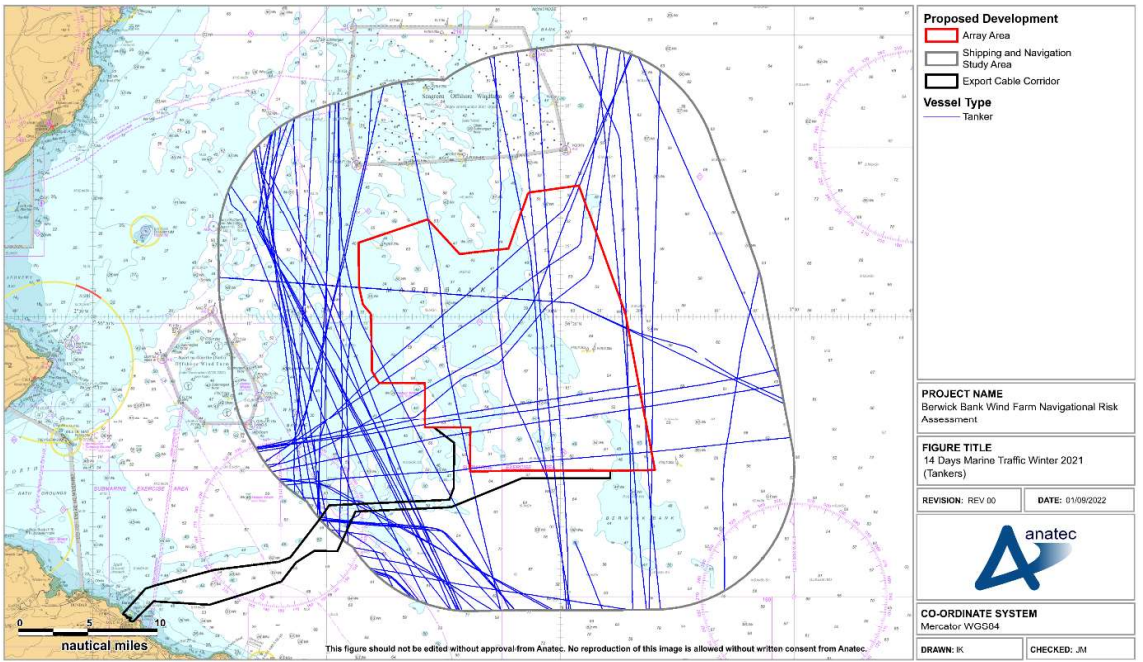


Figure 10.11 Tanker Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Winter 2021)

Throughout the survey periods an average of four unique tankers per day were recorded within the Proposed Development array area shipping and navigation study area. Regular tanker routeing included east-west out of the Firth of Forth and north-south following the UK east coast. Tankers avoided the Seagreen buoyed construction area during the summer period.

Tanker subtypes recorded within the Proposed Development array area shipping and navigation study area included oil/chemical tankers (30%), oil products tankers (20%) and Liquid Petroleum Gas (LPG) tankers (18%).

10.1.2.3 Commercial Fishing Vessels

Vessel Traffic Survey Data

Commercial fishing vessel data was extracted from the vessel tracks recorded during the vessel traffic surveys. It is noted that the term 'fishing vessel' as used throughout this NRA refers to commercial fishing vessels, and any non-commercial fishing activity (such as rod and line angling) is categorised under recreational vessel activity. On this basis the tracks of commercial fishing vessels recorded within the Proposed Development array area shipping and navigation study area throughout both survey periods are presented in Figure 10.12.

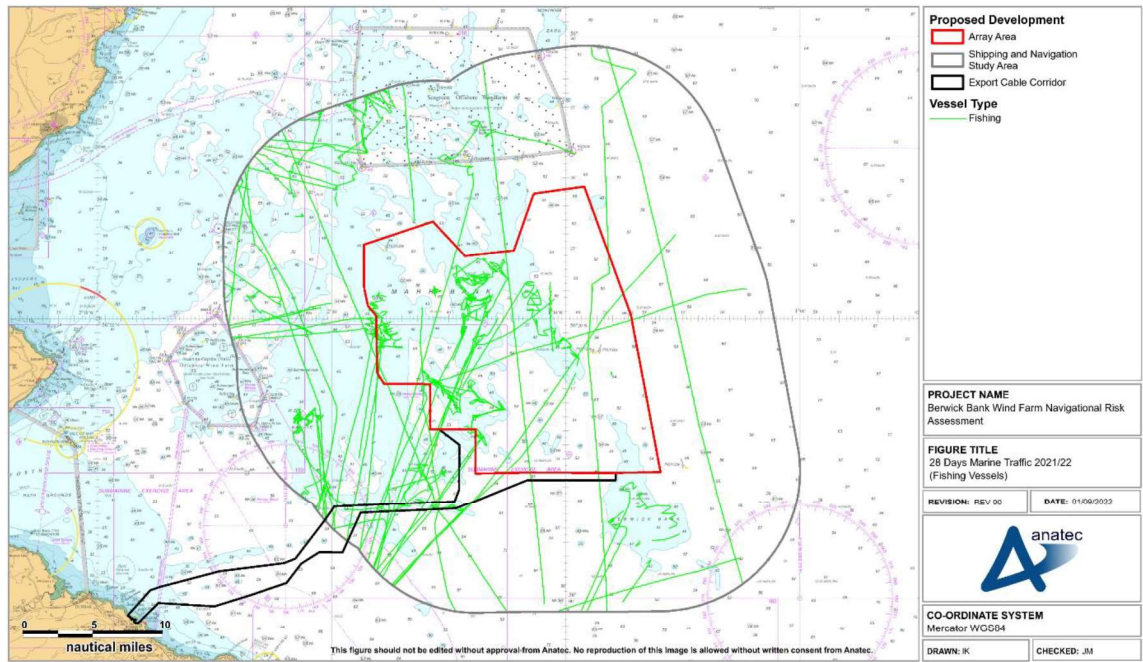


Figure 10.12 Commercial Fishing Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Throughout the survey periods an average of one to two unique commercial fishing vessels per day passed within the Proposed Development array area shipping and navigation study area. Of the commercial fishing vessels recorded, 84% were recorded via AIS with 14% recorded via radar and 2% recorded via visual observations. Although AIS is only mandatory for commercial fishing vessels greater than 15 m LOA, 81% of the commercial fishing vessels recorded using AIS were under 15 m LOA.

Those commercial fishing vessels observed within the Seagreen buoyed construction area were recorded during the winter period, prior to the start of Seagreen construction.

Based on the average speed and behaviour of vessel tracks, there is a substantial volume of the fishing vessel activity in the Proposed Development array area shipping and navigation study area that is characteristic of active fishing rather than transits.

Fishing gear type could only be identified for 28% of the commercial fishing vessels recorded. The most common fishing gear types recorded in the Proposed Development array area shipping and navigation study area throughout the survey periods were potter/whelkers (62%) and demersal trawlers (15%).

Nationality could be identified for 87% of the commercial fishing vessels recorded, with the remaining 13% consisting of the commercial fishing vessels recorded via radar/visual observation. The nationality of all commercial fishing vessels able to be recorded was British.

Vessel Monitoring System Data

In addition to the vessel traffic survey data, Vessel Monitoring System (VMS) data recorded between July 2018 and June 2021 has also been analysed within the Proposed Development array area shipping and navigation study area (noting that this period predates the start of Seagreen construction – Seagreen is included in Figure 10.13 for context). A density grid, using the VMS data during this period as input, is presented in Figure 10.13.

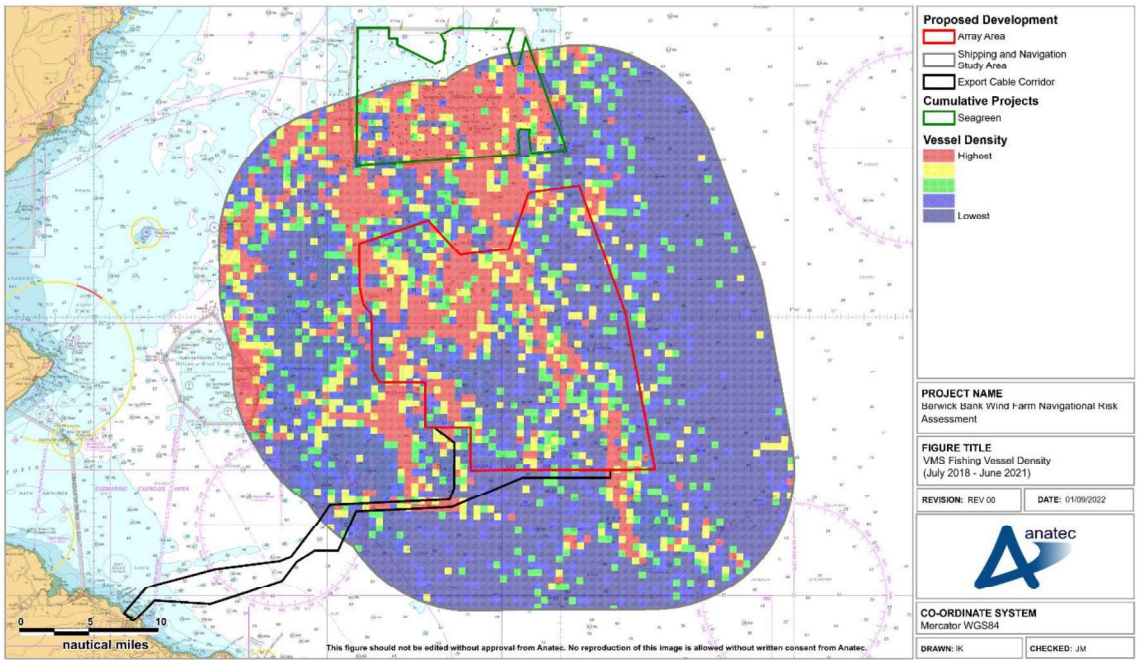


Figure 10.13 VMS Fishing Vessel Density (July 2018 – June 2021)

The highest density areas were to the north of the Proposed Development array area and within the northern part of Proposed Development array area. This correlates well with the long-term AIS data for fishing vessels during 2019 presented in Appendix E, noting that this also predates the start of Seagreen construction.

Comparison with volume 2, chapter 12

The baseline established in **volume 2, chapter 12** indicates that overall commercial fishing activity is most prominent in coastal areas, particularly in the approaches to the Firth of Forth and much further north, south of Stonehaven. Activities around the Firth of Forth are dominated by demersal stern trawlers with activity further north dominated by scallop dredgers, with some contribution from whelkers/potters. The nationality of almost all fishing vessels observed was British.

This shows good agreement with the baseline established in this section, in terms of the fishing gear types and nationalities identified. In terms of the distribution of commercial fishing vessel activity, there is also reasonable agreement, noting that the extent of the

Proposed Development array area shipping and navigation study area does not allow for detailed comparison in relation to coastal activities.

10.1.2.4 Oil and Gas Vessels

Vessel Traffic Survey Data

The tracks of oil and gas vessels recorded within the Proposed Development array area shipping and navigation study area throughout both survey periods are presented in Figure 10.14.



Figure 10.14 Oil and Gas Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Throughout the survey periods an average of one unique oil and gas vessel per day passed through the Proposed Development array area shipping and navigation study area. The majority of these vessels were on passage north-south between Aberdeen and gas fields in the Southern North Sea.

Those oil and gas vessels observed within the Seagreen buoyed construction area were recorded during the winter period, prior to the start of Seagreen construction.

Long-Term Vessel Traffic Data

Following consultation with the UK Chamber of Shipping and Forth Ports, it was confirmed that occasional vessel traffic movements associated with jack-ups, semi-submersibles and other platforms occur in the region.

Although no such activities were identified in the vessel traffic survey data, one such instance was identified in the long-term vessel traffic data; this involved an FPSO being towed by two tugs and supported by two other vessels east-west into Dundee, passing the Proposed Development array area at a minimum distance of approximately 1.8 nm. A plot showing this activity is presented in Appendix E, with Forth Ports confirming in consultation that such activities occur infrequently; based on arrivals data provided by Forth Ports there have been an average of eight rig callings per year at ports in the Forth and Tay in the seven-year period between 2015 and 2021.

10.1.2.5 Recreational Vessels

Vessel Traffic Survey Data

For the purposes of the NRA, recreational activity includes sailing and motor craft of between 2.4 and 24 m LOA. The tracks of recreational vessels recorded within the Proposed Development array area shipping and navigation study area throughout both survey periods are presented in Figure 10.15.

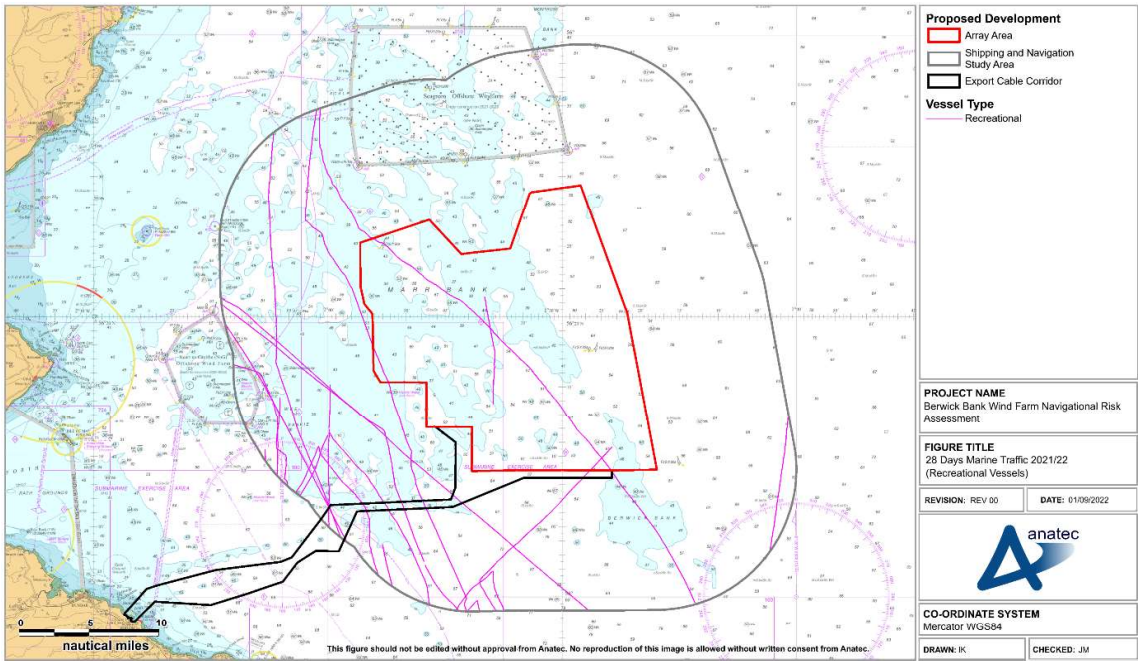


Figure 10.15 Recreational Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

One recreational vessel per day was recorded within the Proposed Development array area shipping and navigation study area during the summer survey period, with none recorded during the winter survey period. All recreational vessels were recorded via AIS, with no recreational vessels recorded via radar.

RYA Coastal Atlas of Recreational Boating

In addition to the vessel traffic survey data, the *RYA Coastal Atlas of Recreational Boating* (RYA, 2019) has been reviewed for the region. The RYA Coastal Atlas may be used to “help identify and protect areas of importance to recreational boaters, to advise on new development proposals and in discussions over navigational safety”. The RYA Coastal Atlas includes a heat map indicating the density of recreational activity around the UK coast as well as features relevant to recreational boating such as general boating areas, clubs, training centres and marinas.

Figure 10.16 presents a plot of the RYA Coastal Atlas heat map relative to the Proposed Development array area. Following this, Figure 10.17 presents a plot of features relevant to recreational boating.

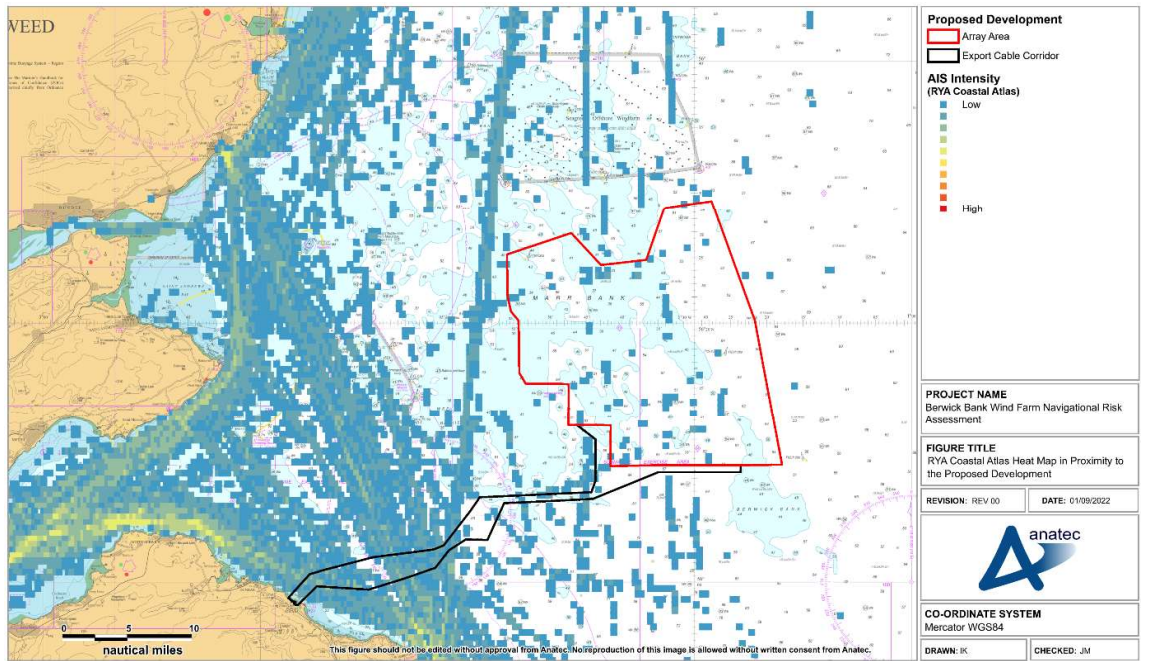


Figure 10.16 RYA Coastal Atlas Heat Map in Proximity to Proposed Development

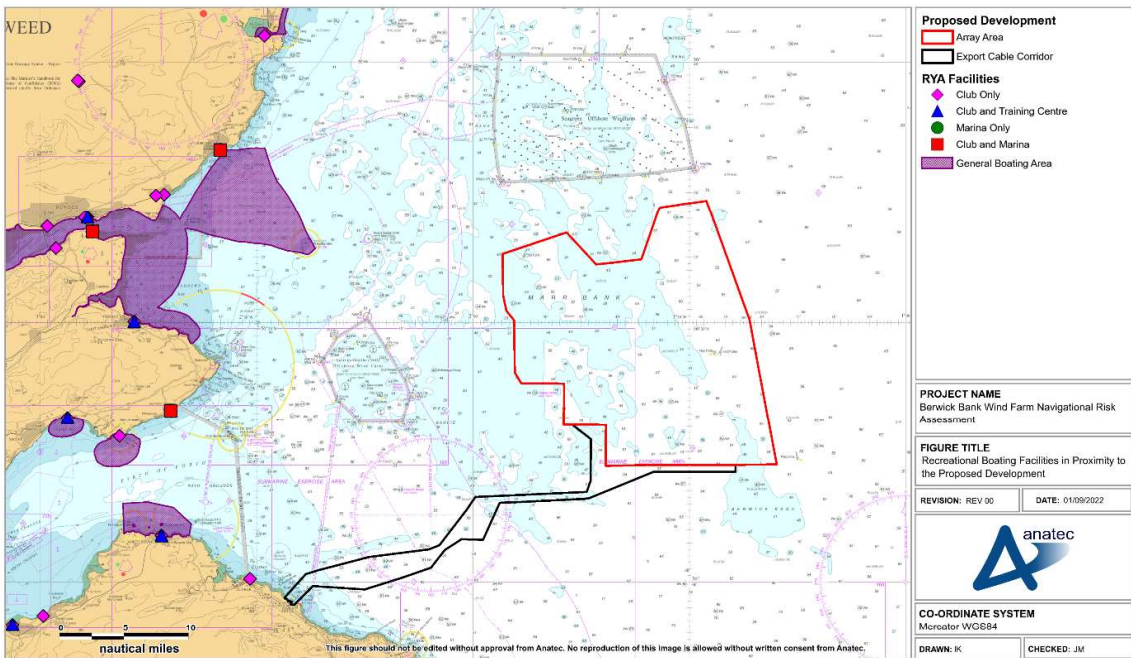


Figure 10.17 RYA Coastal Atlas Features in Proximity to Proposed Development

Higher density recreational traffic is observed towards the coast and the Firth of Forth, with a gradual decrease culminating in sparse activity within the Proposed Development array area. There are a number of RYA facilities along the coast in the vicinity, with the nearest general boating area located approximately 13 nm west of the Proposed Development array area.

Consultation Feedback

During consultation, RYA Scotland stated that only around 20% to 25% of cruising vessels in the region transmit an AIS signal (see 9 March and 28 September 2021 entries in Table 4.1) and numbers should be multiplied by five to obtain a more accurate estimate of recreational activity. On this basis, from the long-term vessel traffic data (which consists of AIS only) there are estimated to be an average of two to three unique vessels per day.

The Forth Yacht Clubs Association indicated that smaller recreational vessels – which are less likely to carry AIS – generally route inshore of the Proposed Development array area (see 28 September 2021 entry in Table 4.1). This correlates with the density heat map and general boating areas from the RYA Coastal Atlas which highlight more coastal areas as popular for recreational vessels.

10.1.2.6 Passenger Vessels

Vessel Traffic Survey Data

Figure 10.18 presents the passenger vessels recorded within the Proposed Development array area study area during the summer survey period.

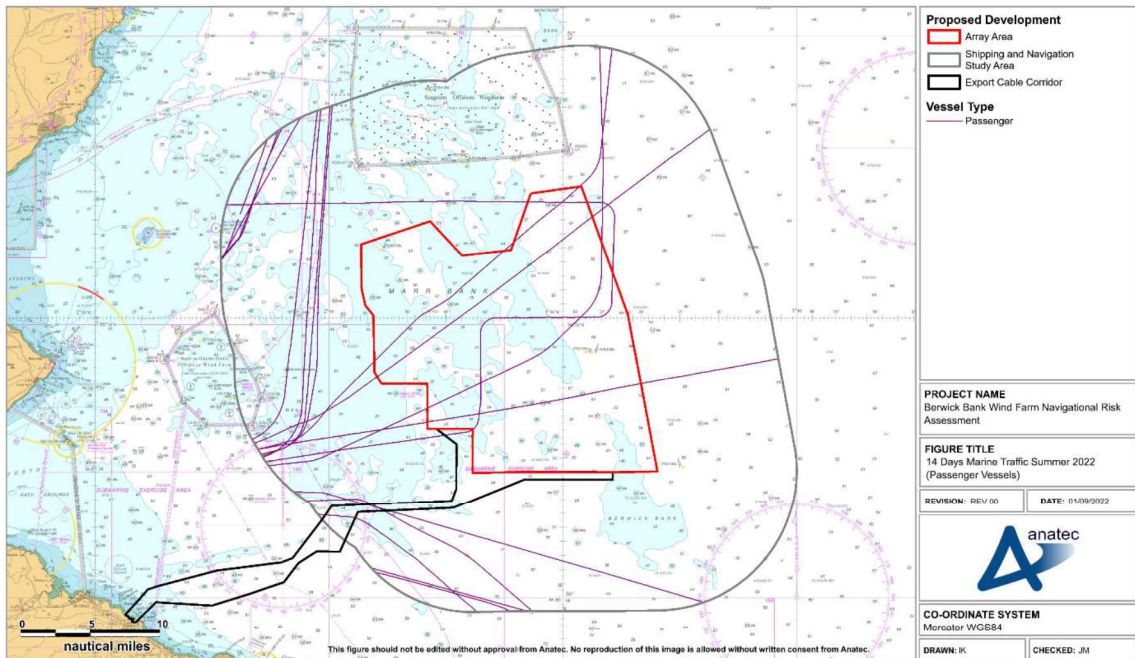


Figure 10.18 Passenger Vessel Traffic within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2022)

An average of one to two unique passenger vessels per day were recorded within the Proposed Development shipping and navigation study area during the summer survey period, with all passenger vessels recorded being cruise liners on destinations to/from ports in the Firth of Forth. No passenger vessels were recorded within the Proposed Development array area shipping and navigation study area throughout the winter survey period, however. Following an assessment of long-term vessel traffic data (see Appendix E), it is concluded that this, as well as the lack of regularly scheduled passenger vessels, is likely a result of the COVID-19 pandemic which has had a substantial effect on shipping movements globally (see section 5.4.3).

Consultation Feedback

During consultation, Forth Ports confirmed that during the COVID-19 pandemic there were no visits by cruise ships to the Firth of Forth, but under normal circumstances there are around 125 visits per year by cruise ships. An estimated 170 passenger vessel transits were observed within the long-term vessel traffic data in and out of the Firth of Forth. However it is noted that the Proposed Development array area shipping and navigation study area does not capture all passenger vessel movements in and out of the Firth of Forth, and due to cruise schedules numbers are subject to fluctuation season on season.

10.1.3 Vessel Sizes

10.1.3.1 Vessel Length Overall

A plot of all vessel tracks (excluding temporary traffic) recorded within the Proposed Development array area shipping and navigation study area throughout the survey periods, colour-coded by length overall (LOA), is presented in Figure 10.19. Following this, the distribution of these LOA classes by survey period is presented in Figure 10.20.

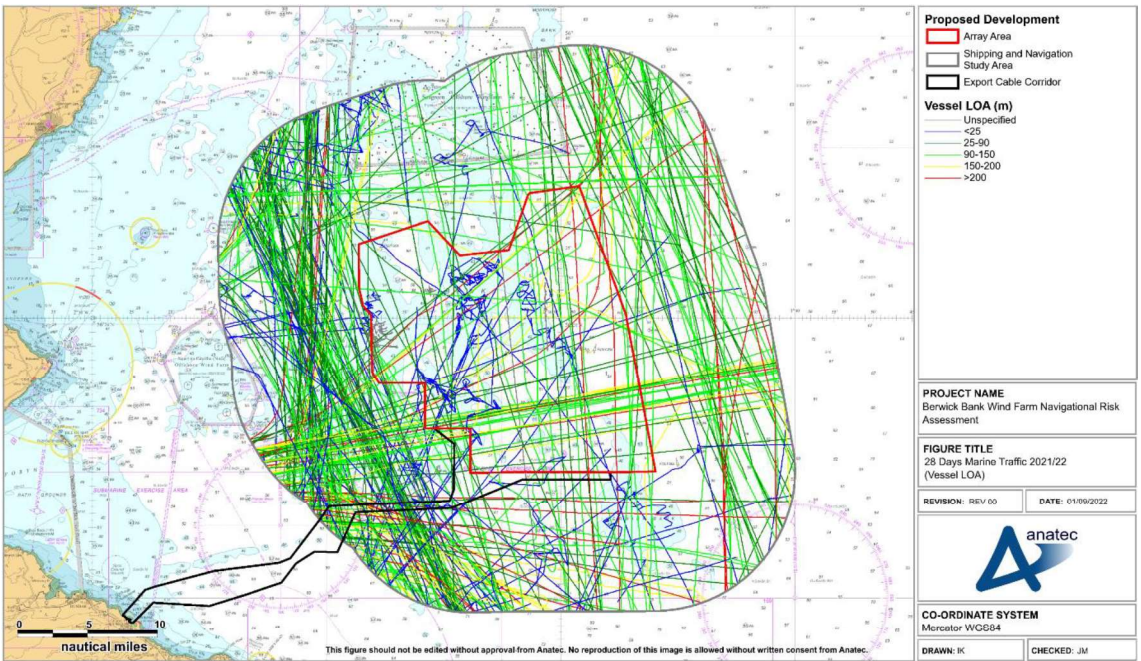


Figure 10.19 Vessel Traffic Movements within Proposed Development Array Area Shipping and Navigation Study Area by Vessel LOA (28 Days Summer 2022 and Winter 2021)

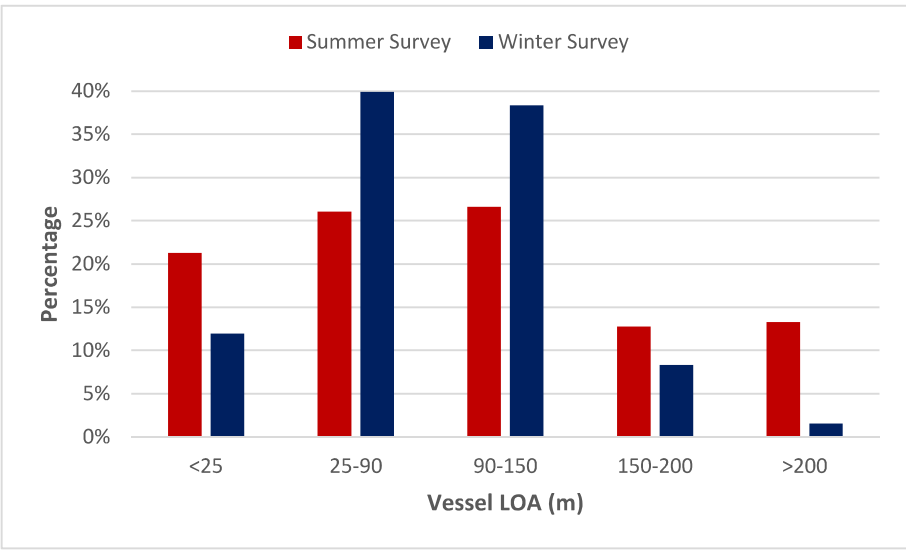


Figure 10.20 Vessel LOA Distribution within Proposed Development Array Area and Shipping and Navigation Study Area (28-Days Summer 2022 and Winter 2021)

Vessel LOA was available for approximately 98% of vessels recorded in the Proposed Development array area shipping and navigation study area throughout both survey periods and ranged from 8 m for a potter fishing vessel to 330 m for three crude oil tankers.

Excluding the vessels for which an LOA was not available, the average LOA of all vessels within the Proposed Development array area shipping and navigation study area throughout the summer and winter survey periods was 89 m and 94 m, respectively.

10.1.3.2 Vessel Draught

A plot of all vessel tracks (excluding temporary traffic) recorded within the Proposed Development array area shipping and navigation study area throughout the survey periods, colour-coded by draught, is presented in Figure 10.21. Following this, the distribution of these draught classes by survey period is presented in Figure 10.22.

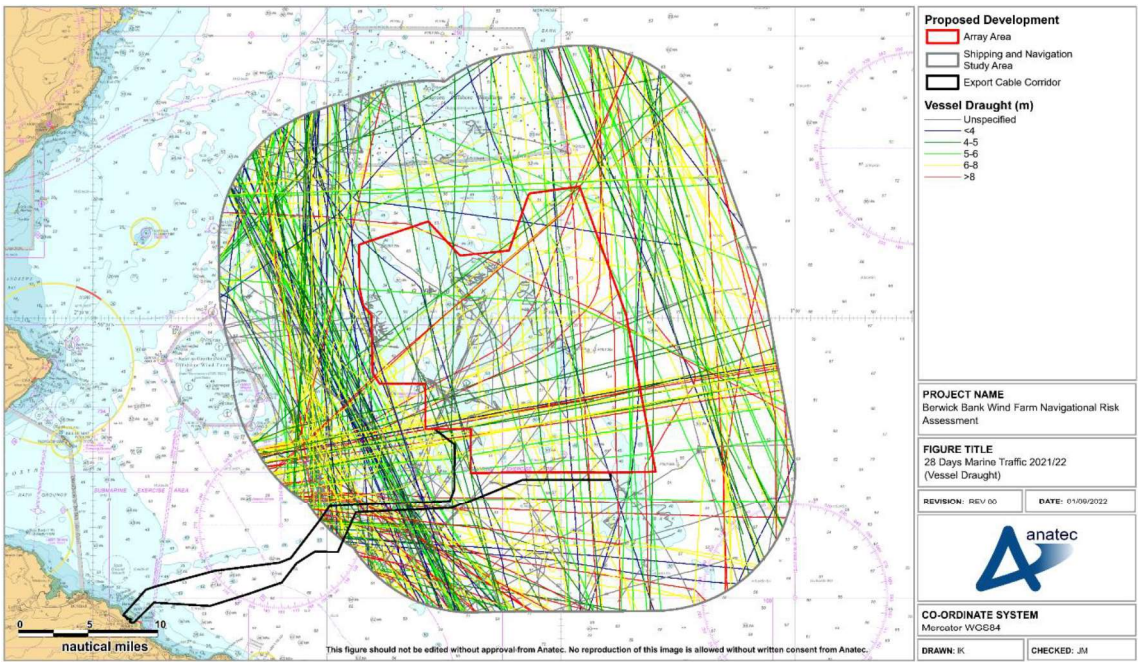


Figure 10.21 Vessel Traffic Movements within Proposed Development Array Area Shipping and Navigation Study Area by Vessel Draught (28 Days Summer 2022 and Winter 2021)

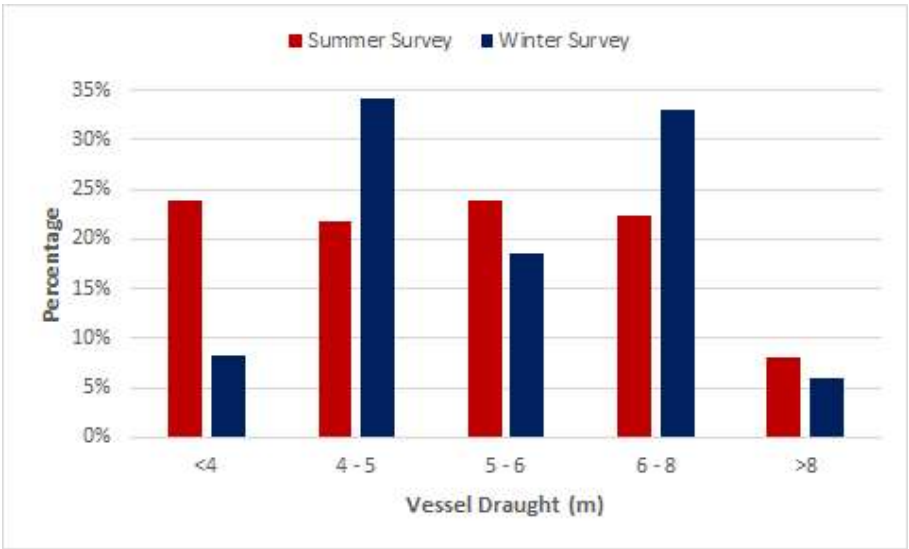


Figure 10.22 Vessel Draught Distribution within Proposed Development Array Area and Shipping and Navigation Study Area (28-Days Summer 2022 and Winter 2021)

Vessel draught was available for approximately 67% of vessels recorded in the Proposed Development array area shipping and navigation study area throughout both survey periods and ranged from 1.2 m for a wind farm support vessel to 20 m for a crude oil tanker.

Excluding the vessels for which a draught was not available, the average draught of all vessels within the Proposed Development array area shipping and navigation study area throughout the summer and winter survey periods was 5.2 m and 5.8 m, respectively.

10.1.4 Anchoring Activity

Anchored vessels can be identified based upon the AIS navigational status which is programmed on the AIS transmitter on board a vessel. However, information is manually entered into the AIS, and therefore it is common for vessels not to update their navigational status if only at anchor for a short period of time.

For this reason, those vessels which travelled at a speed of less than 1 kt for more than 30 minutes had their corresponding vessel tracks individually checked for patterns characteristic of anchoring activity. After applying these criteria, no vessels were deemed to be at anchor within the Proposed Development array area shipping and navigation study area.

10.2 Proposed Development Export Cable Corridor

A number of tracks recorded during the Proposed Development export cable corridor survey periods were classified as temporary (non-routine), such as the tracks of non-routine survey vessels and vessels associated with the construction of NnG. These have therefore been excluded from the analysis.

A plot of the vessel tracks recorded during a 14-day survey period in July 2020, colour-coded by vessel type and excluding temporary traffic, is presented in Figure 10.23. A plot of the vessel tracks recorded during a further 14-day survey period in January 2021, colour-coded by vessel type and excluding temporary traffic, is presented in Figure 10.24.

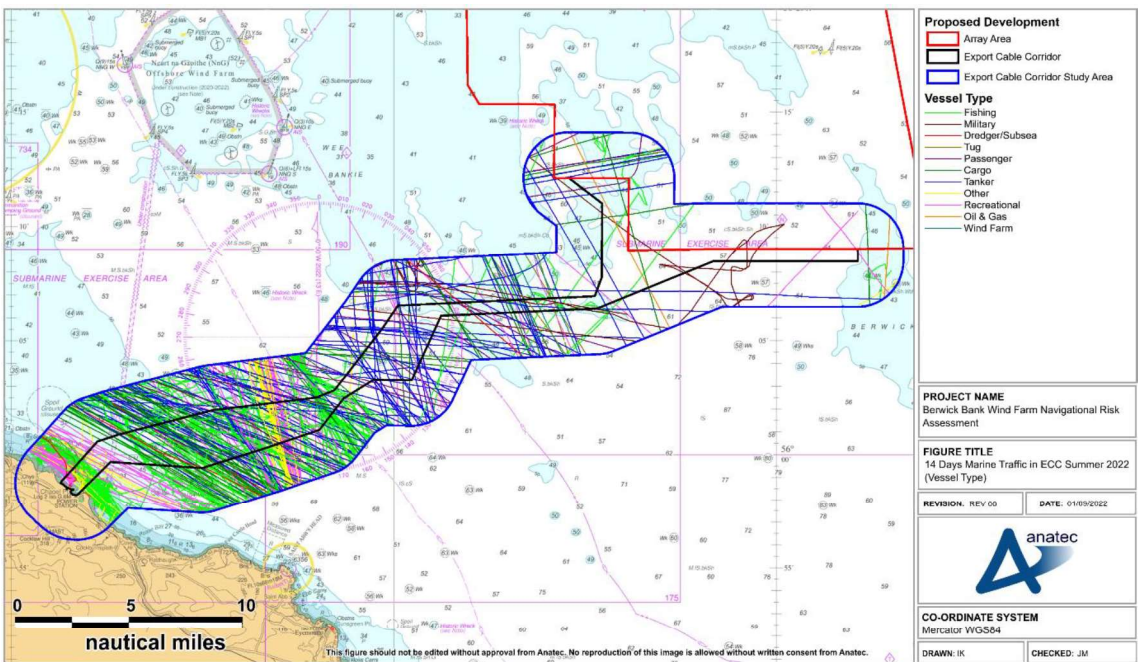


Figure 10.23 Vessel Traffic Movements within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Vessel Type (14 Days Summer 2022)

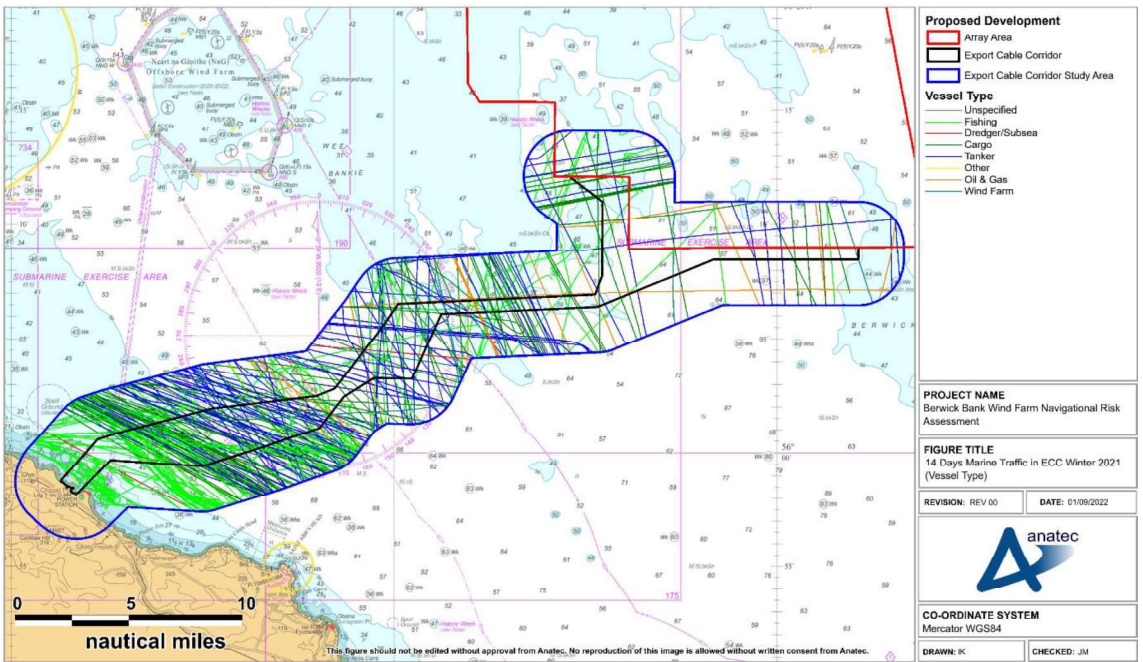


Figure 10.24 Vessel Traffic Movements within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Vessel Type (14 Days Winter 2021)

Plots of the vessel tracks for the summer and winter survey periods converted to a density heat map are presented in Figure 10.25 and Figure 10.26, respectively.

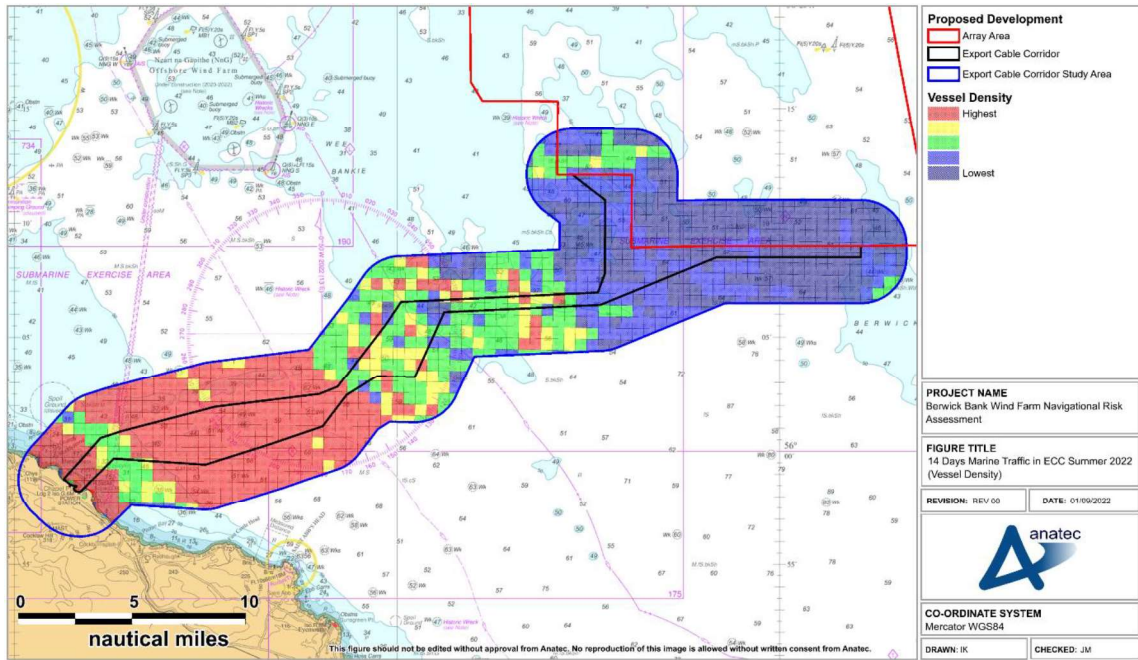


Figure 10.25 Vessel Density Heat Map within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (14 Days Summer 2022)

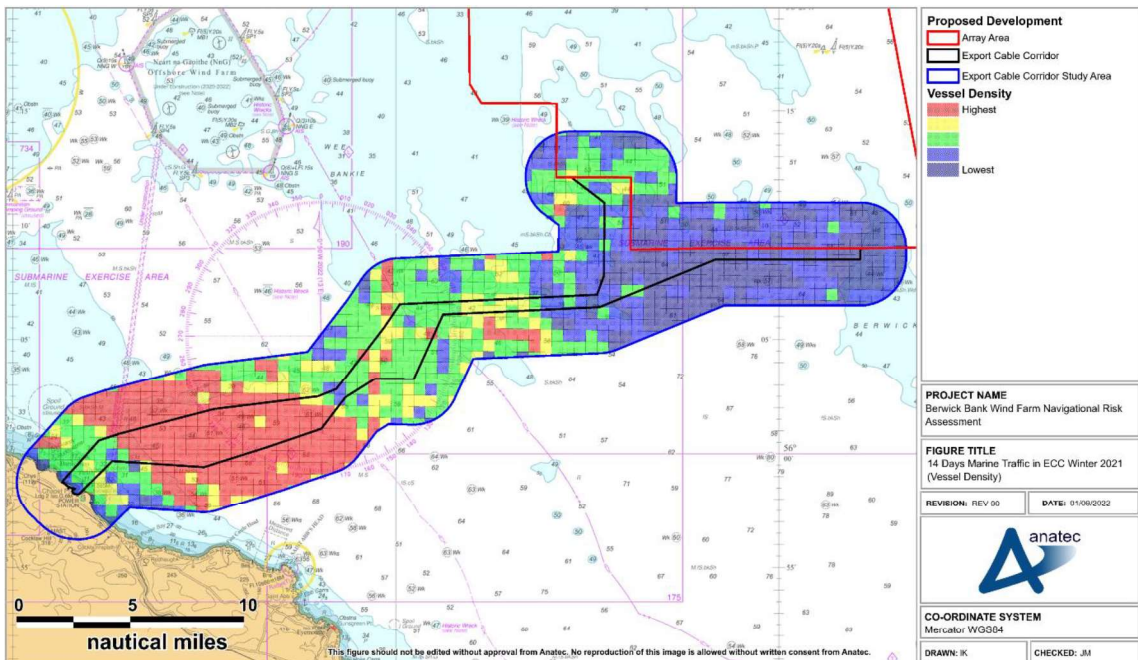


Figure 10.26 Vessel Density Heat Map within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (14 Days Winter 2021)

10.2.1 Vessel Counts

For the 14 days analysed in the summer survey period, there was an average of 29 unique vessels per day recorded within the Proposed Development export cable corridor shipping and navigation study area. In terms of vessels intersecting the Proposed Development export cable corridor itself, there was an average of 25 unique vessels per day.

The daily number of unique vessels recorded within the Proposed Development export cable corridor shipping and navigation study area and the Proposed Development export cable corridor itself during the summer survey period are presented in Figure 10.27. Since the survey commenced and concluded midway through the first and last days of the summer survey period (as described in section 5.2), the first and last days are partial.

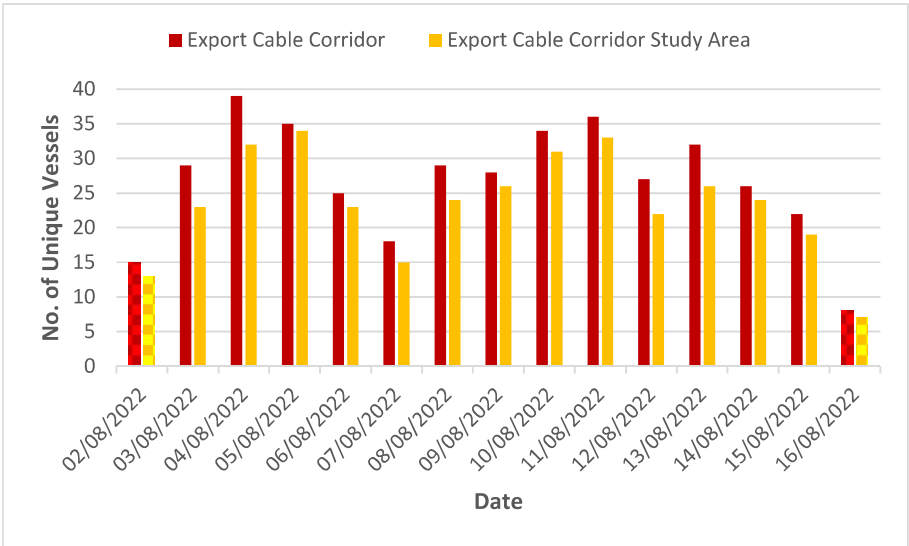


Figure 10.27 Unique Vessels per Day within the Proposed Development Export Cable Corridor Area and Shipping and Navigation Area (14 Days Summer 2022)

Throughout the summer survey period approximately 87% of unique vessel tracks recorded within the Proposed Development export cable corridor shipping and navigation study area intersected the Proposed Development export cable corridor itself.

The busiest day recorded within the Proposed Development export cable corridor shipping and navigation study area throughout the summer survey period was 4 August when 39 unique vessels were recorded. The busiest day recorded within the Proposed Development export cable corridor itself throughout the summer survey period was 5 August when 34 unique vessels were recorded.

The quietest full day recorded within the Proposed Development export cable corridor shipping and navigation study area throughout the summer survey period was 7 August when 18 unique vessels were recorded. The quietest full day recorded within the Proposed Development export cable corridor itself throughout the summer survey period was also 7 August when 15 unique vessels were recorded.

For the 14 days analysed in the winter survey period, there was an average of 19 unique vessels per day recorded within the Proposed Development export cable corridor shipping and navigation study area. In terms of vessels intersecting the Proposed Development export cable corridor itself, there was an average of 18 unique vessels per day.

The daily number of unique vessels recorded within the Proposed Development export cable corridor shipping and navigation study area and the Proposed Development export cable corridor itself are presented in Figure 10.28.

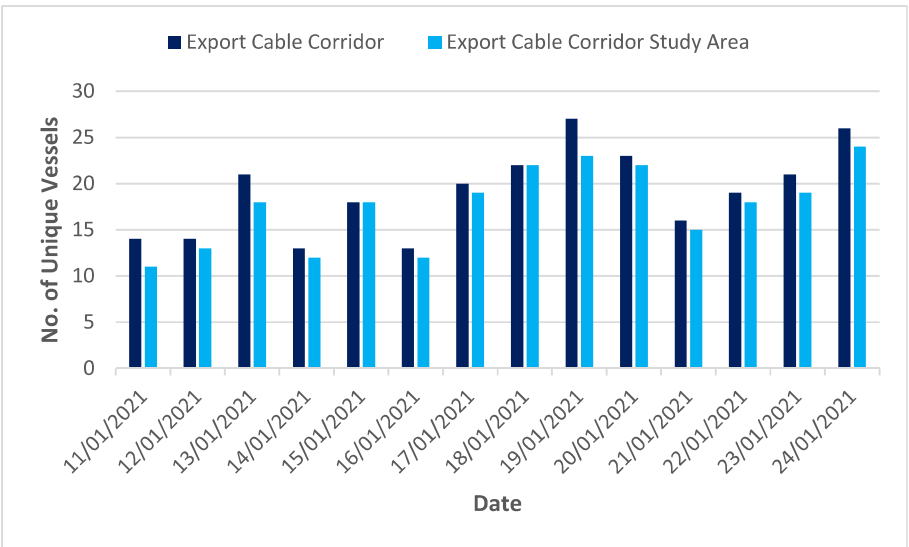


Figure 10.28 Unique Vessels per Day within the Proposed Development Export Cable Corridor Area and Shipping and Navigation Study Area (14 Days Winter 2021)

Throughout the winter survey period approximately 92% of unique vessel tracks recorded within the Proposed Development export cable corridor shipping and navigation study area intersected the Proposed Development export cable corridor itself.

The busiest day recorded within the Proposed Development export cable corridor shipping and navigation study area throughout the winter survey period was 19 January when 27 unique vessels were recorded. The busiest days recorded within the Proposed Development export cable corridor itself throughout the winter survey period was 24 January when 24 unique vessels were recorded.

The quietest days recorded within the Proposed Development export cable corridor shipping and navigation study area throughout the winter survey period were 14 January and 16 January when 13 unique vessels were recorded each. The quietest day recorded within the Proposed Development export cable corridor itself throughout the winter survey period was 11 January when 11 unique vessels were recorded.

10.2.2 Vessel Types

The percentage distribution of the main vessel types recorded within the Proposed Development export cable corridor shipping and navigation study area is presented in Figure 10.29.

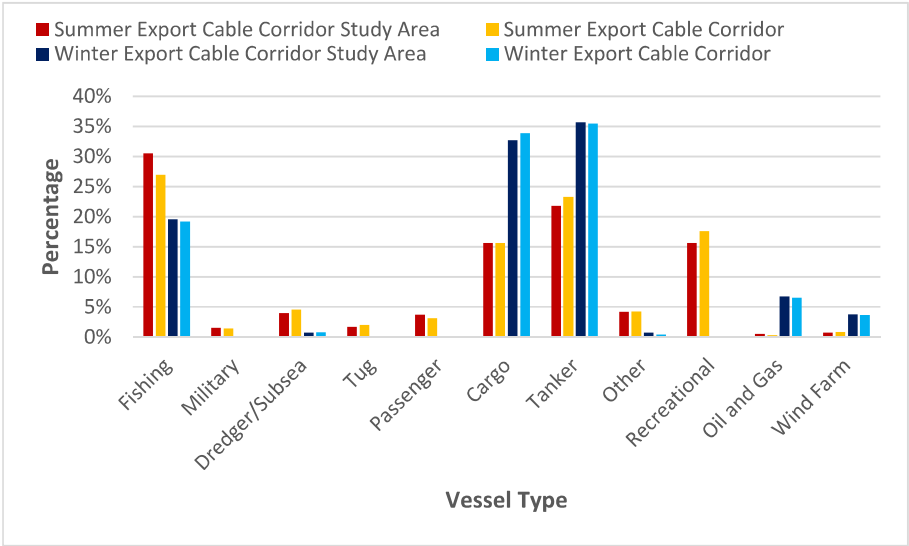


Figure 10.29 Vessel Type Distribution within Proposed Development Export Cable Corridor Area and Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Throughout the summer period, the most common vessel types in the Proposed Development export cable corridor shipping and navigation study area were fishing vessels (31%), tankers (22%), cargo vessels (16%), and recreational vessels (16%). Throughout the winter period, the most common vessel types were tankers (36%), cargo vessels (33%), and fishing vessels (20%).

Although cruise liners were recorded within the Proposed Development export cable corridor study area during the summer period, no commercial ferries were identified in the winter period, which aligns with feedback provided by Forth Ports during consultation (see 10 June 2020 entry in Table 4.1).

10.2.2.1 Tankers

The tracks of tankers recorded within the Proposed Development export cable corridor shipping and navigation study area throughout both survey periods are presented in Figure 10.30.

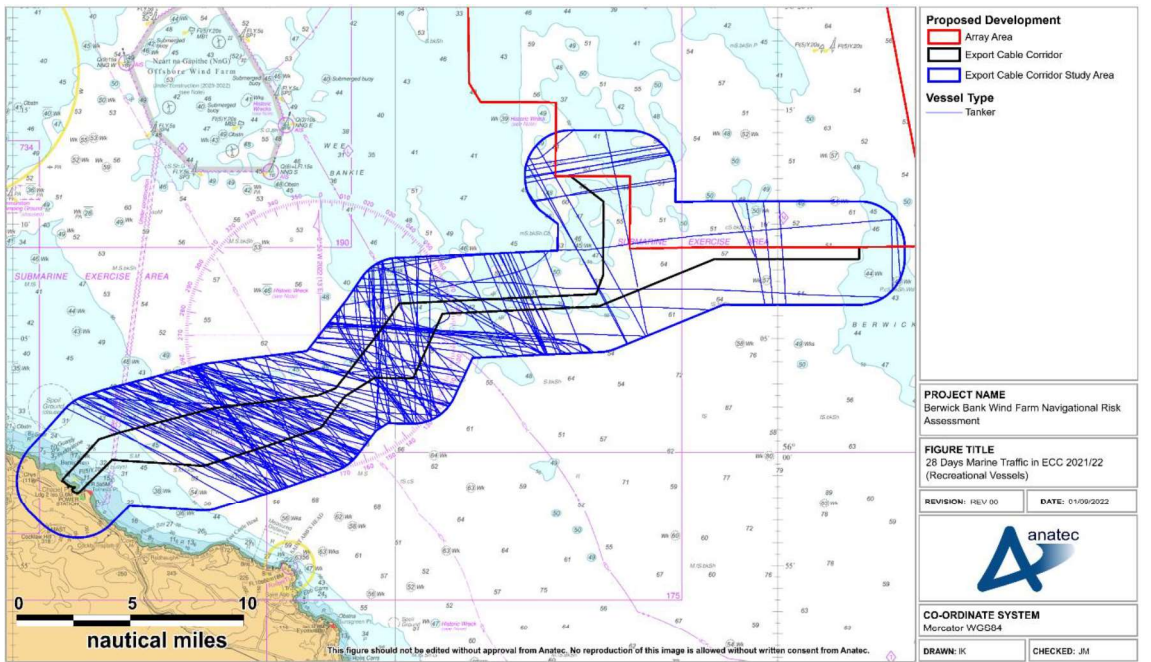


Figure 10.30 Tanker Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Throughout the survey periods, an average of between six and seven tankers per day were recorded within the Proposed Development export cable corridor shipping and navigation study area. Regular tanker routing included coastal transits out of the Firth of Forth.

Tanker subtypes recorded in the Proposed Development export cable corridor shipping and navigation study area included oil/chemical tankers (31%), LPG tankers (27%), and oil product tankers (22%).

10.2.2.2 Commercial Fishing Vessels

Vessel Traffic Data

The tracks of commercial fishing vessels recorded within the Proposed Development export cable corridor shipping and navigation study area throughout both survey periods, are presented in Figure 10.31.

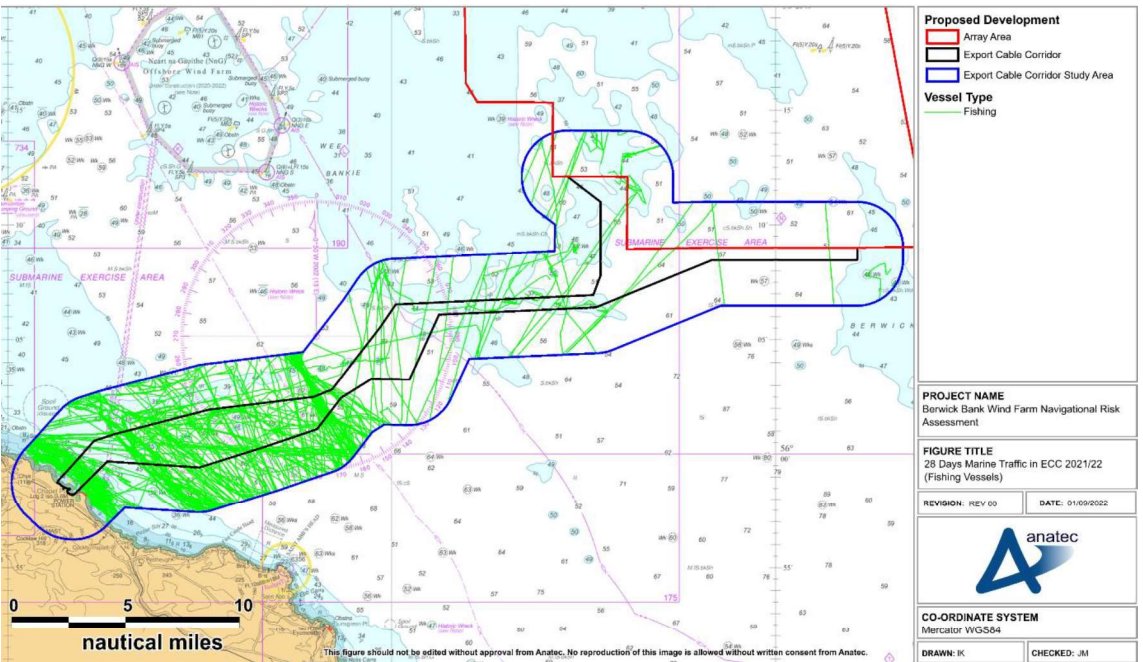


Figure 10.31 Commercial Fishing Vessel Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Throughout the survey periods an average of six commercial fishing vessels per day were recorded within the Proposed Development export cable corridor shipping and navigation study area. All the commercial fishing vessels were recorded via AIS with no recreational vessels recorded via radar. Although AIS is only mandatory for fishing vessels greater than 15 m LOA, 46% of the commercial fishing vessels recorded using AIS were under 15 m LOA.

Fishing gear type could not be identified for 52% of the commercial fishing vessels recorded. The most common fishing gear types recorded in the Proposed Development export cable corridor shipping and navigation study area during the survey periods were demersal trawlers (70%), twin trawlers (13%), and potters (11%).

The nationality of all commercial fishing vessels recorded was British.

Vessel Monitoring System Data

In addition to the vessel traffic survey data, VMS data recorded between July 2018 and June 2021 has also been analysed within the Proposed Development export cable corridor shipping and navigation study area. A density grid, using the VMS data during this period as input, is presented in Figure 10.32.

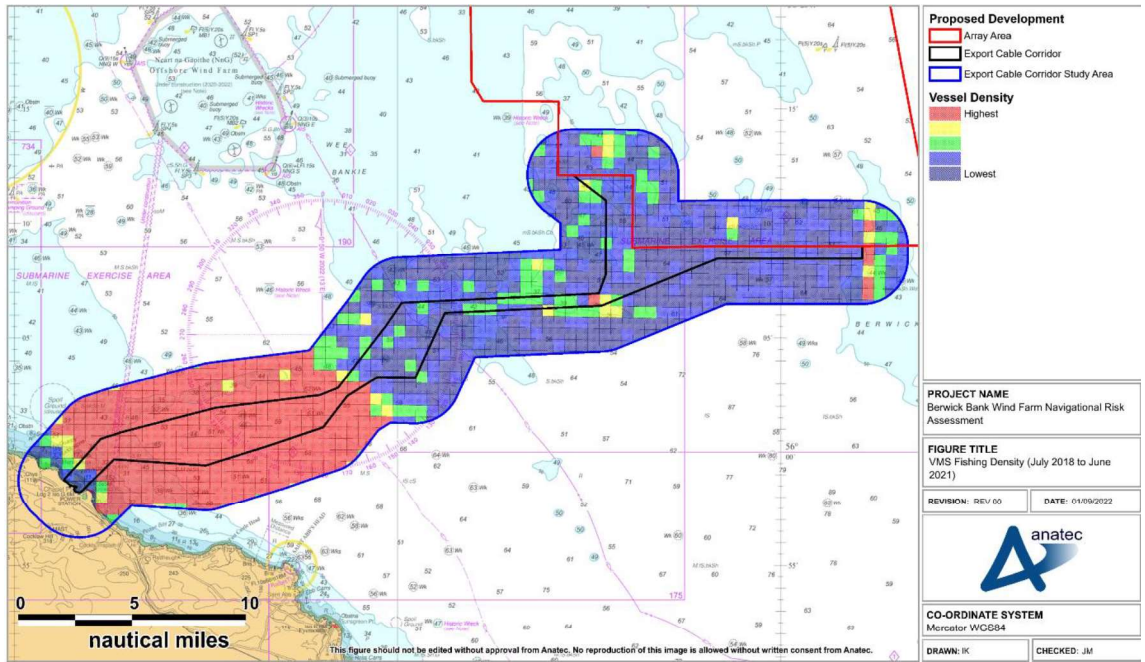


Figure 10.32 VMS Fishing Density within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (July 2018 – June 2021)

Similarly to the AIS data, the nearshore areas recorded the highest density of VMS fishing activity, with moderate density recorded on the eastern edge of the Proposed Development export cable corridor shipping and navigation study area.

Comparison with volume 2, chapter 12

The baseline established in **volume 2, chapter 12** indicates that overall commercial fishing activity is most prominent in coastal areas, particularly in the approaches to the Firth of Forth, where the Proposed Development export cable corridor makes landfall. Activities around the Proposed Development export cable corridor are dominated by trawlers and the nationality of almost all fishing vessels observed was British.

This shows good agreement with the baseline established in this section, in terms of the fishing gear types and nationalities identified. In terms of the distribution of commercial fishing vessel activity, there is also reasonable agreement, with the majority of activity occurring in coastal areas rather than the portion of the Proposed Development export cable corridor further offshore.

10.2.2.3 Cargo Vessels

The tracks of cargo vessels recorded within the Proposed Development export cable corridor shipping and navigation study area throughout both survey periods are presented in Figure 10.33.

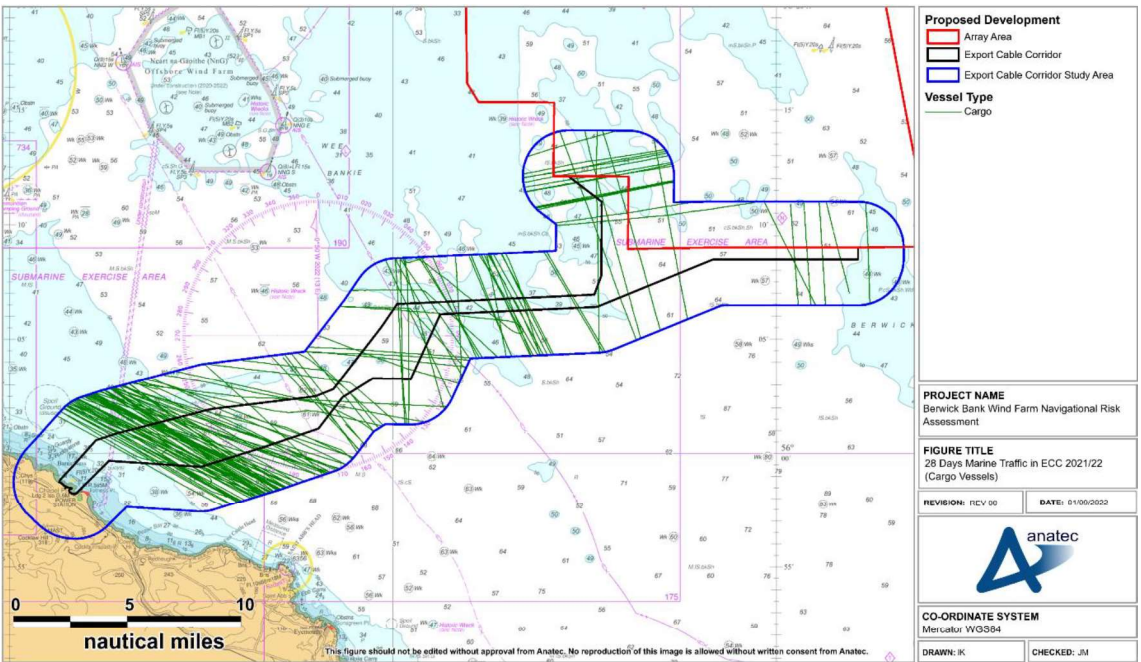


Figure 10.33 Cargo Vessel Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Throughout the survey periods an average of five unique cargo vessels per day were recorded within the Proposed Development export cable corridor shipping and navigation study area. Regular cargo vessel routeing included coastal transits out of the Firth of Forth.

Cargo vessel subtypes recorded in the Proposed Development export cable corridor shipping and navigation study area included general cargo (64%) and container vessels (29%).

10.2.2.4 Recreational Vessels

Vessel Traffic Data

The tracks of recreational vessels recorded within the Proposed Development export cable corridor shipping and navigation study area throughout both survey periods are presented in Figure 10.34.

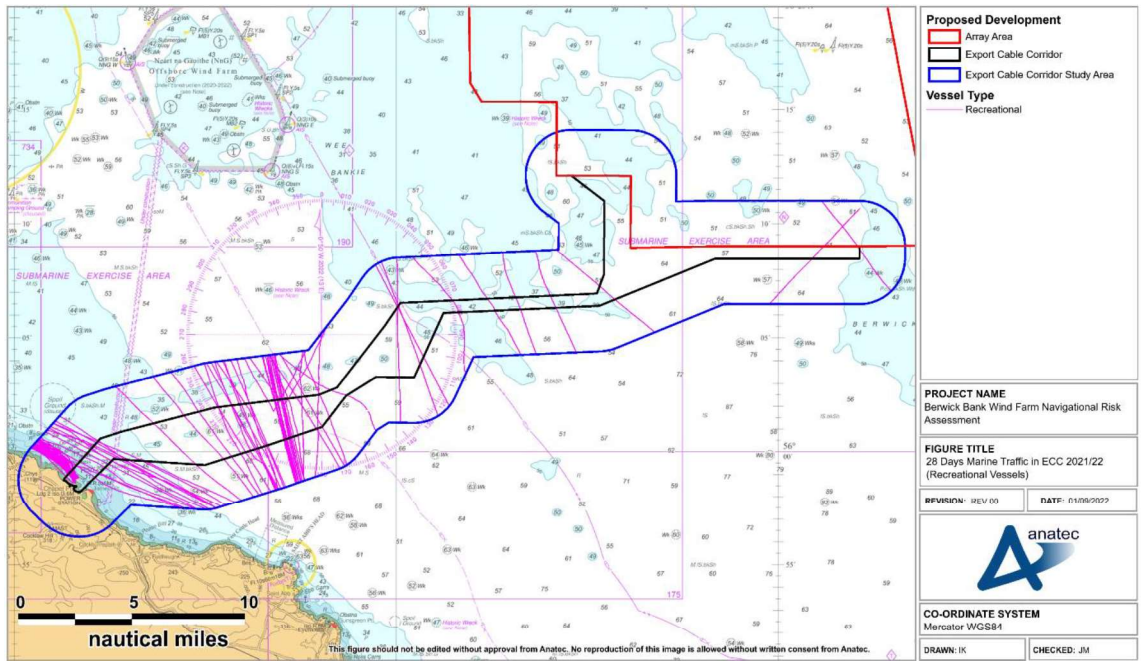


Figure 10.34 Recreational Vessel Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

An average of approximately four to five recreational vessels per day were recorded within the Proposed Development export cable corridor shipping and navigation study area during the summer survey period, with none recorded during the winter survey period. All recreational vessels were recorded via AIS, with no recreational craft recorded on radar.

RYA Coastal Atlas of Recreational Boating

Figure 10.16 presents a plot of the RYA Coastal Atlas heat map relative to the Proposed Development export cable corridor. Following this, Figure 10.17 presents a plot of features relevant to recreational boating.

The RYA Coastal Atlas shows good correlation with the AIS data, in that the majority of recreational activity is coastal.

10.2.2.5 Oil and Gas Vessels

The tracks of oil and gas vessels recorded within the Proposed Development export cable corridor shipping and navigation study area throughout both survey periods, are presented in Figure 10.35.

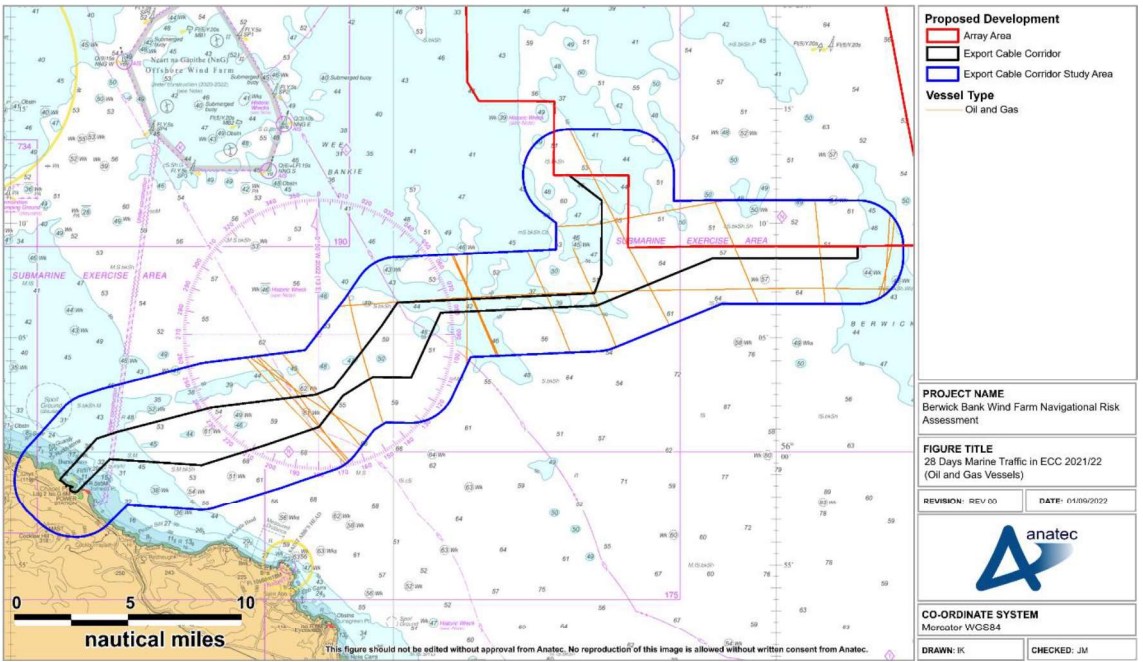


Figure 10.35 Oil and Gas Vessel Traffic within Proposed Development Export Cable Corridor Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Throughout the survey periods, an average of approximately one oil and gas vessel per day passed within the Proposed Development export cable corridor shipping and navigation study area. The majority of these vessels were on passage north-south between Aberdeen and gas fields in the Southern North Sea.

10.2.2.6 Passenger Vessels

Vessel Traffic Data

Throughout the survey periods, an average of approximately one passenger vessel per day passed within the Proposed Development export cable corridor shipping and navigation study area during the summer survey period, with none recorded during the winter survey period. Following an assessment of Anatec's in-house ShipRoutes database, it is concluded that this is a result of the COVID-19 pandemic which has had a substantial effect on shipping movements globally (see section 5.4.3).

Anatec ShipRoutes Database

ShipRoutes includes one notable route featuring passenger vessels that passes through the Proposed Development export cable corridor, on a similar course to the main tanker route shown in Figure 10.30. This route crosses the North Sea between the Firth of Forth and

Hamburg⁷ and constitutes approximately 110 transits per year (one vessel every three to four days).

This correlates with feedback received from Forth Ports during consultation indicating that under normal circumstances, when the effects of the COVID-19 pandemic are not present, there are around 125 visits per year by cruise ships to the Forth. It should be noted that the Proposed Development export cable corridor only covers one approach to the Forth and cruise schedules and numbers are subject to fluctuation season on season.

10.2.3 Vessel Sizes

10.2.3.1 Vessel Length

A plot of all vessel tracks (excluding temporary traffic) recorded within the Proposed Development export cable corridor shipping and navigation study area throughout the survey periods, colour-coded by LOA, is presented in Figure 10.36. Following this, the distribution of these LOA classes by survey period is presented in Figure 10.37.

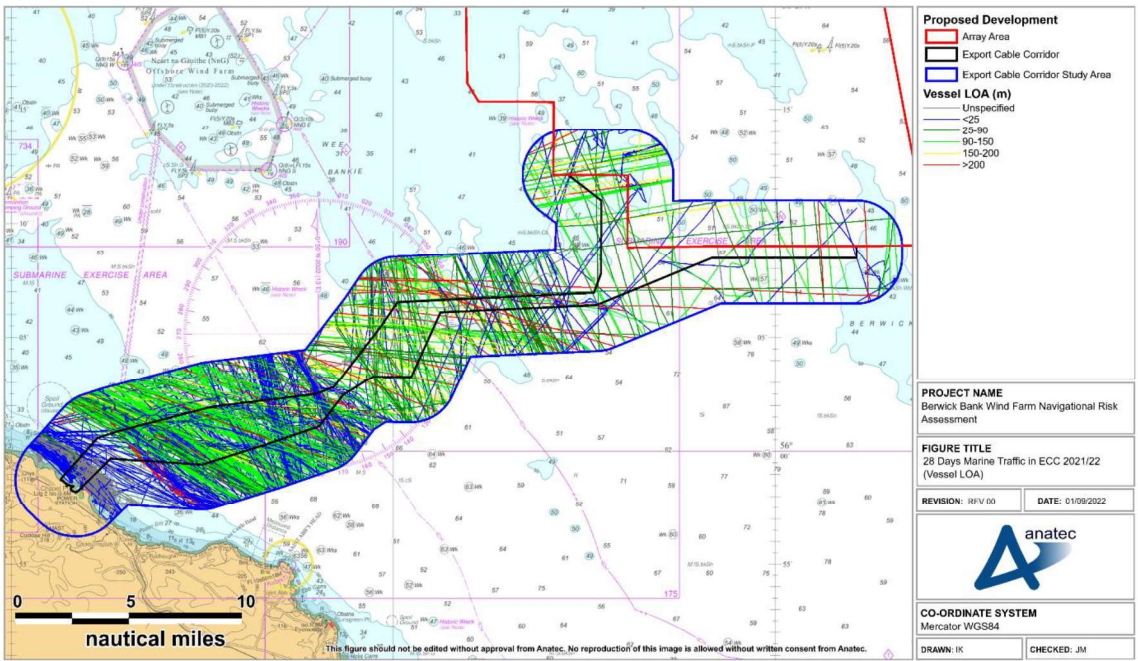


Figure 10.36 Vessel Traffic Movements within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Vessel LOA (28 Days Summer 2022 and Winter 2021)

⁷ Hamburg is identified as the leading destination for the route, noting that there are alternative destinations in the North Sea.

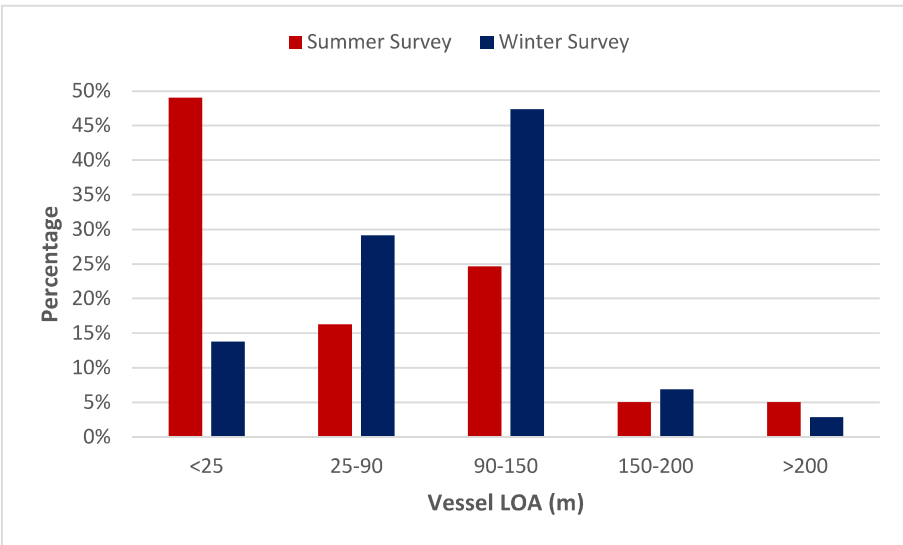


Figure 10.37 Vessel LOA Distribution within Proposed Development Export Cable Corridor and Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Vessel LOA was available for approximately 89% of vessels recorded in the Proposed Development export cable corridor shipping and navigation study area throughout both survey periods and ranged from 5 m for a RNLI lifeboat to 330 m for two crude oil tankers.

Excluding the vessels for which an LOA was not available, the average LOA of all vessels within the Proposed Development export cable corridor shipping and navigation study area throughout the summer and winter survey periods was 69 m and 98 m, respectively.

10.2.3.2 Vessel Draught

A plot of all vessel tracks (excluding temporary traffic) recorded within Proposed Development export cable corridor shipping and navigation study area throughout the survey periods, colour-coded by draught, is presented in Figure 10.38. Following this, the distribution of these draught classes by survey period is presented in Figure 10.39.

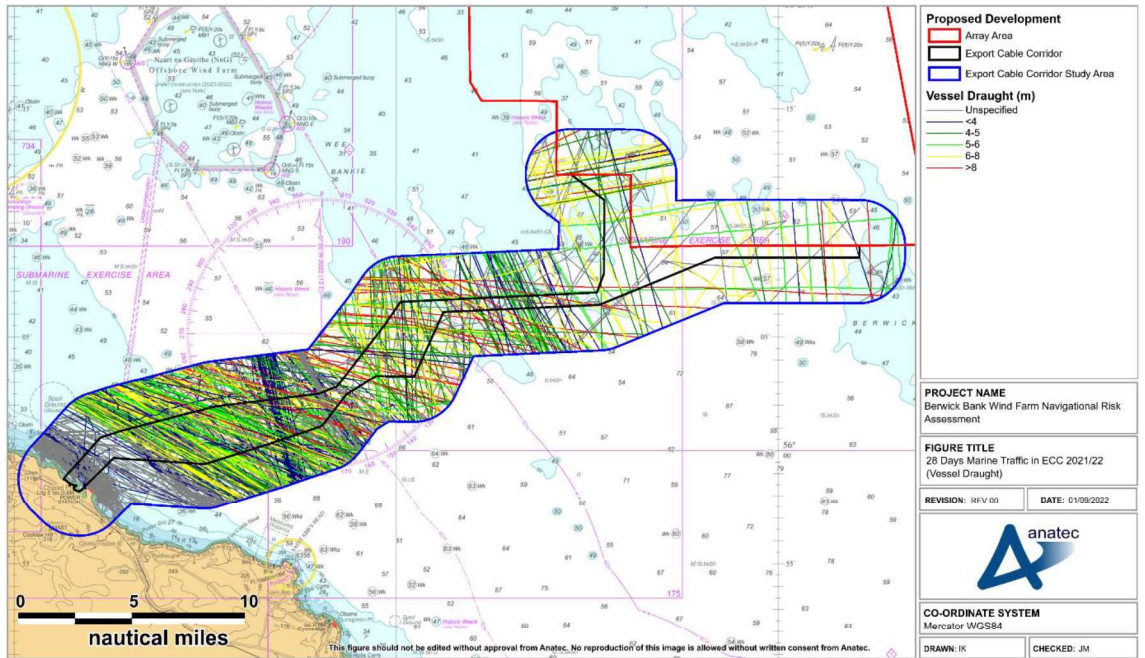


Figure 10.38 Vessel Traffic Movements within Proposed Development Export Cable Corridor Shipping and Navigation Study Area by Vessel Draught (28 Days Summer 2022 and Winter 2021)

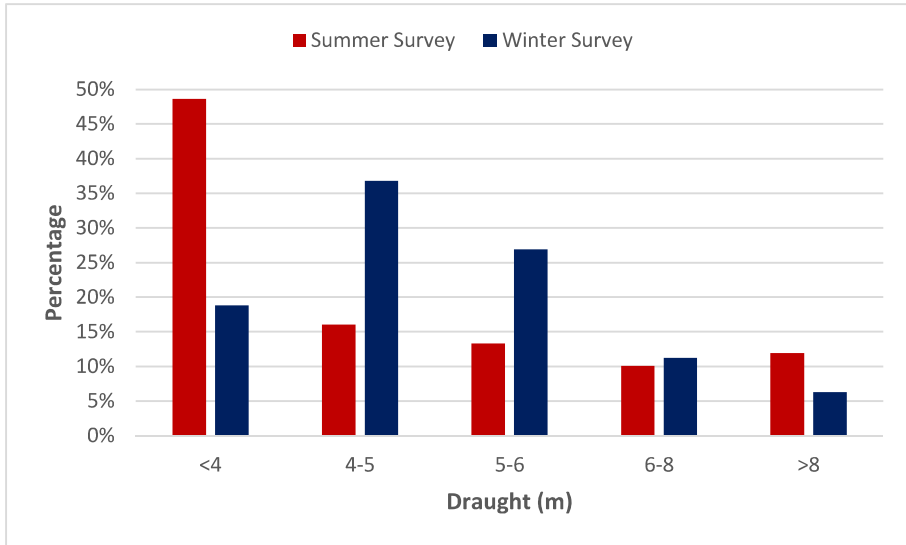


Figure 10.39 Vessel Draught Distribution within Berwick Bank Export Cable Corridor and Shipping and Navigation Study Area (28 Days Summer 2022 and Winter 2021)

Vessel draught was available for approximately 50% of vessels recorded in the Proposed Development export cable corridor shipping and navigation study area throughout both survey periods and ranged from 0.9 m for a fishing vessel to 20 m for a crude oil tanker.

Excluding the vessels for which a draught was not available, the average draught of all vessels within the Proposed Development export cable corridor shipping and navigation study area throughout the summer and winter survey periods was 4.6 m and 5.3 m respectively.

10.2.4 Anchoring Activity

The same criteria outlined in section 10.1.4 for identifying anchored vessels has been applied to the vessel traffic data for the Proposed Development export cable corridor shipping and navigation study area.

After applying these criteria, no vessels were deemed to be at anchor within the Proposed Development export cable corridor shipping and navigation study area.

11 Base Case Vessel Routeing

11.1 Definition of a Main Commercial Route

Main commercial routes have been identified using the principles set out in MGN 654 (MCA, 2021). Vessel traffic data are assessed and vessels transiting at similar headings and locations are identified as a main route. To help identify main routes, vessel traffic data can also be interrogated to show vessels (by name and/or operator) that frequently transit those routes. The route width is then calculated using the 90th percentile rule from the median line of the potential shipping route as shown in Figure 11.1. Additionally, the outputs of consultation undertaken with local stakeholders assisted in the identification of the main commercial routes.

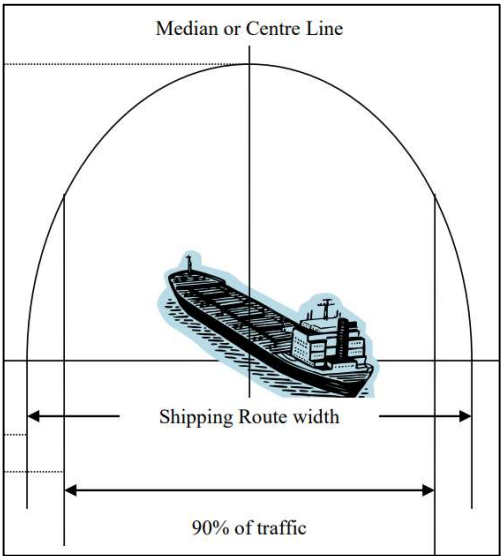


Figure 11.1 Illustration of Main Route Calculation (MCA, 2021)

11.2 Pre Wind Farm Main Commercial Routes

A total of 15 main commercial routes were identified within the Proposed Development array area shipping and navigation study area from the vessel traffic survey data⁸ and consultation. These main commercial routes and corresponding 90th percentiles within the Proposed Development array area shipping and navigation study area are shown relative to the Proposed Development array area in Figure 11.2. Following this, a description of each route is provided in Table 11.1, including the average number of vessels per day, start and end locations and main vessel types. It is noted that the start and end locations are based on the most common destinations transmitted via AIS by vessels on those routes.

⁸ The summer period has been given priority over the winter period where there are differences in vessel traffic movements resulting from the construction of Seagreen given that these changes are reflective of the baseline to be expected post construction of Seagreen.

To ensure all main commercial routes are captured, the long-term vessel traffic data has been used to validate the main commercial routes identified from the vessel traffic survey data, with consideration given to the change in vessel traffic movements due to the presence of Seagreen.

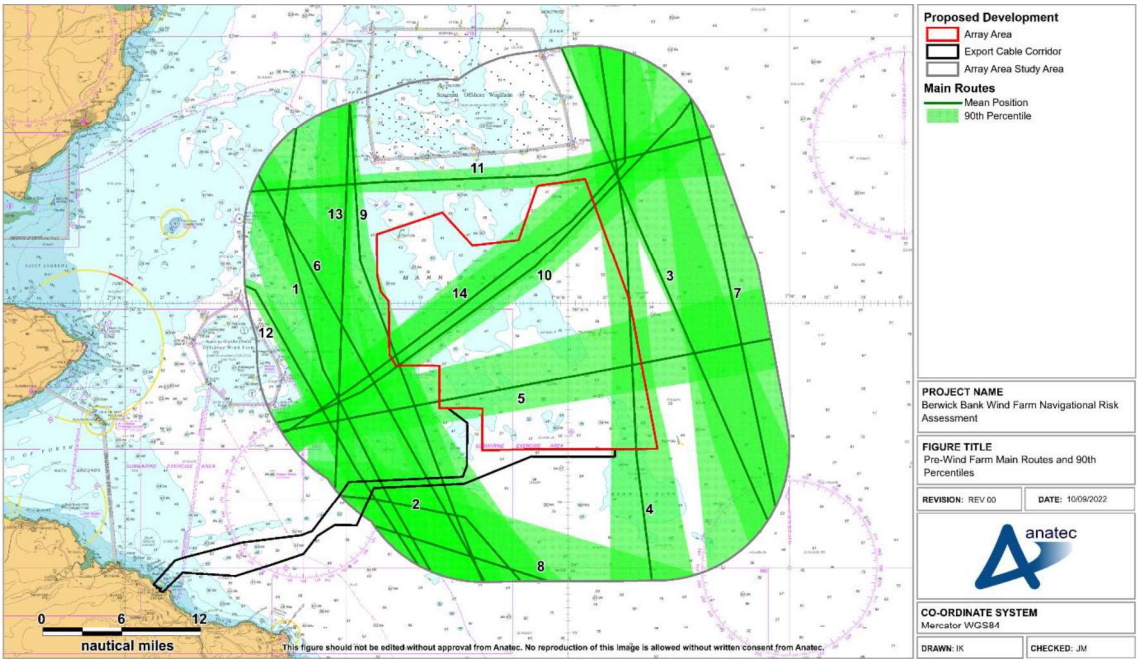


Figure 11.2 Main Commercial Routes and 90th Percentiles within Proposed Development Array Area Shipping and Navigation Study Area (Pre Wind Farm)

Table 11.1 Description of Main Commercial Routes

Route Number	Average Vessels Per Day	Description
1	1–2	Aberdeen (UK)–Humber ports. Generally used by tankers (88%).
2	1–2	Forth ports–Antwerp (Belgium). Generally used by tankers (82%).
3	1–2	Aberdeen–Great Yarmouth (UK). Generally used by oil and gas vessels (46%) and cargo vessels (38%).
4	1	Aberdeen–Humber ports. Generally used by cargo vessels (50%) and tankers (36%).
5	1	Forth ports–Baltic ports. Generally used by tankers (48%) and cargo vessels (43%).
6	0–1	Montrose (UK)–Rotterdam (Netherlands). Generally used by cargo vessels (72%).
7	0–1	Invergordon (UK)–Humber ports. Generally used by cargo vessels (75%).
8	0–1	Forth ports–Hamburg (Germany). Generally used by tankers (64%).

Route Number	Average Vessels Per Day	Description
9	0–1	Aberdeen–Humber ports. Generally used by passenger vessels (57%) and cargo vessels (28%).
10	0–1	Forth ports–north Norway ports. Generally used by cargo vessels (42%) and tankers (32%).
11	0–1	Dundee (UK)–Baltic ports. Generally used by cargo vessels (65%).
12	0–1	Dundee–Rotterdam. Generally used by cargo vessels (51%) and offshore support vessels (41%).
13	0–1	Aberdeen–Eyemouth (UK). Generally used by tankers (55%) and offshore support vessels (29%).
14	0–1	Forth ports–Pennsylvania (US). Generally used by tankers (49%) and passenger vessels (34%).

There is likely additional routing in and out of the Firth of Forth which falls outside of the Proposed Development array area shipping and navigation study area. This includes tankers headed for Braefoot Bay which may be located further inshore, as noted by Forth Ports during consultation (see 12 June 2020 entry in Table 4.1) and passenger vessels (as noted in section 10.1.2.6). Given the distance from the Proposed Development array area, it is not anticipated that such routing will be affected by the presence of the Proposed Development in isolation. However, such routing is considered in the assessment of cumulative deviations where appropriate (see section 15.6.2).

12 Adverse Weather Vessel Traffic Movements

Some vessels and vessel operators may operate alternative routes during periods of adverse weather. This section focuses on vessel movements in adverse weather. Consideration is given to the implications of the presence of, or activities associated with, the Proposed Development during adverse weather. For example, if a commercial vessel is unable to make passage, or a small craft is unable to access safe havens.

Adverse weather includes wind, wave and tidal conditions as well as reduced visibility due to fog. Adverse weather can hinder a vessel's standard route, its speed of navigation and/or its ability to enter the destination port. Adverse weather routes are assessed to be significant course adjustments to mitigate vessel motion in adverse weather conditions. When transiting in adverse weather conditions, a vessel is likely to encounter various types of weather and tidal phenomena, which may lead to severe roll motions, potentially causing damage to cargo, equipment and/or discomfort and danger to persons on board. The sensitivity of a vessel to these phenomena will depend on the actual stability parameters, hull geometry, vessel type, vessel size and speed.

12.1 Identification of Periods with Adverse Weather

Historical weather information provided by the Met Office (Met Office, 2019) has been used to identify periods of adverse weather during 2019 (the year covered by the long-term vessel traffic data) when routes within or in proximity to the Proposed Development could be considered most likely to be altered or cancelled. The key weather events identified are detailed in Table 12.1.

Table 12.1 Key Weather Events During 2019 Relevant to the Proposed Development (Met Office)

Weather Event	Date(s)	Details
Storm Erik	21 to 27 February 2019	Deep Atlantic low pressure system which brought strong winds to the UK with much of the country recording gusts over 58 kt.
Storm Freya	3 to 4 March 2019	Strong winds and heavy rain in England, Wales and southern Scotland.
Storm Gareth	10 to 16 March 2019	Turbulent week of very wet and windy weather.

12.2 Commercial Routeing Changes

The long-term vessel traffic data has been used to identify potential commercial routeing activity related to adverse weather conditions within and in proximity to the Proposed Development, with the periods outlined in Table 12.1 studied most closely.

No substantial alternative routeing was observed. However, during consultation adverse weather routeing was raised by the MCA as a topic that requires attention (see 9 March 2021 entry in Table 4.1). This was reflected in feedback received during the second Hazard Workshop, including from Forth Ports indicating that the region is known to experience significant bad weather. The FMA highlighted the Marr Bank as a particular hazard of note for larger tankers navigating coastally in adverse weather (see 27 July 2022 entries in Table 4.1).

Given the coastal nature of vessel routeing in the region, it is highly likely that many vessels choose to navigate a course that minimises exposure to any adverse weather, whilst also accounting for other factors, such as journey time. Route 1 in Figure 11.2 is such an example of a route where the optimal passage for minimising journey time has been conceded in favour of a passage which keeps a closer distance to the UK east coast where there is greater shelter from adverse weather. This also aligns with feedback from Intrada Ship Management during consultation (see 15 December 2021 entry in Table 4.1).

Therefore, the potential for adverse weather hazards due to deviations of main commercial routes has been considered when determining deviations for both the Proposed Development in isolation (see section 15.5) and cumulative scenarios (see section 15.6).

In consultation feedback Intrada Ship Management noted that given their vessels carry deck cargoes they are particularly sensitive to rolling and pitching and will need adequate sea room in order to select headings that mitigate the risks associated with weather/tidal direction.

12.3 Small Craft Use of Safe Havens

As indicated by the long-term vessel traffic data, *RYA Coastal Atlas of Recreational Boating* (RYA, 2019) and consultation feedback, recreational vessel activity predominantly occurs inshore of the Proposed Development array area (and the other offshore wind farm developments in the region) and therefore it is not anticipated that the presence of the Proposed Development array area or associated activities will have a substantial effect on the ability of small craft to access safe havens in adverse weather conditions.

For the less frequent cases of recreational vessels navigating further offshore, the Scottish Whitefish Producers Association indicated that the overall minimum spacing between structures proposed (1,000 m) may not be sufficient for safe navigation. However, this minimum spacing is greater than that present at most existing offshore wind farm developments in the UK, some of which have much greater volumes of small craft activity associated with them (e.g. Rampion Offshore Wind Farm in the English Channel). Figure 12.1 presents an indicative small craft of length 15 m navigating internally within an offshore wind farm array with 1,000 m spacing between structures.

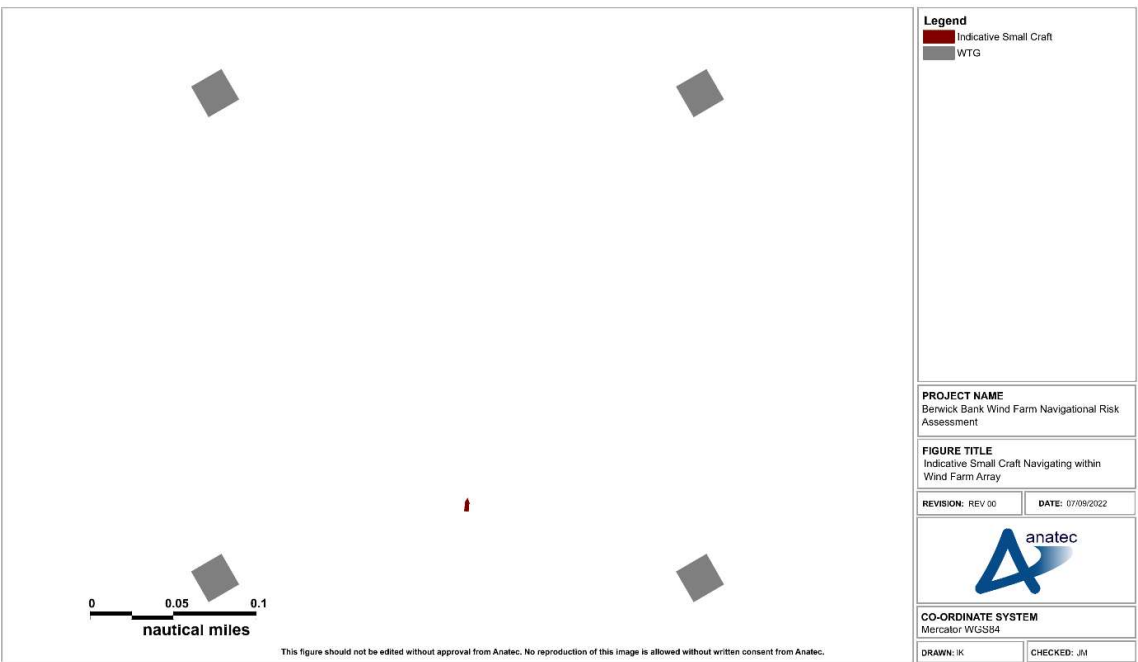


Figure 12.1 Indicative Small Craft Navigating within Wind Farm Array

There is substantial sea room available for a small craft to navigate safely, including in the majority of adverse weather conditions. As per International Convention on the Safety of Life at Sea (SOLAS) Chapter V (IMO, 1974), all vessels at sea are required to passage plan and part of the passage planning process requires them to consider weather forecasts and subsequent conditions. It is anticipated that vessels would then take account of these forecasts prior to embarking on a passage through or offshore of the array.

Taking into account the need for consultation on the final array layout post consent and the requirements of SOLAS Chapter V, there are not considered to be any significant effect on access to safe havens due to the presence of the Proposed Development or associated activities.

13 Navigation, Communication and Position Fixing Equipment

This section discusses the potential hazards upon the navigation, communication, and position-fixing equipment of vessels that may arise due to the infrastructure associated with the Proposed Development.

13.1 Very High Frequency Communications (Including Digital Selective Calling)

In 2004, trials were undertaken at the North Hoyle Offshore Wind Farm, located off the coast of North Wales. As part of these trials, tests were undertaken to evaluate the operational use of typical small-vessel VHF transceivers (including Digital Selective Calling (DSC)) when operated close to wind turbines.

The wind turbines had no noticeable effect on voice communications within the array or ashore. It was noted that if small craft vessel to vessel and vessel to shore communications were not significantly affected by the presence of wind turbines, then it is reasonable to assume that larger vessels with higher powered, and more efficient, systems would also be unaffected.

During this trial, a number of telephone calls were made from ashore, within the array, and on its offshore side. No effects were recorded using any system provider (MCA and QinetiQ, 2004).

Furthermore, as part of SAR trials carried out at the North Hoyle Offshore Wind Farm in 2005, radio checks were undertaken between the Sea King helicopter, and both Holyhead and Liverpool coastguards. The aircraft was positioned to the offshore side of the array, and communications were reported as very clear with no apparent degradation of performance. Communications with the service vessel located within the array were also fully satisfactory throughout the trial (MCA, 2005).

In addition to the North Hoyle trials, a desk-based study was undertaken for the Horns Rev 3 Offshore Wind Farm in Denmark in 2014, and it was concluded that there were not expected to be any conflicts between point to point radio communications networks, and no interference upon VHF communications (Energinet, 2014).

Following consideration of these reports, and noting that since the trials above there have been no significant issues with regards to VHF observed or reported, the presence of the Proposed Development is anticipated to have no significant risk upon VHF communications.

13.2 Very High Frequency Direction Finding

During the North Hoyle Offshore Wind Farm trials in 2004, the VHF Direction Finding (DF) equipment carried in the trial boats did not function correctly when very close to wind turbines (within approximately 50 m). This is deemed to be a relatively small-scale risk due to the limited use of VHF DF equipment and will not impact operational or SAR activities (MCA and QinetiQ, 2004).

Throughout the 2005 SAR trials carried out at North Hoyle, the Sea King radio homer system was tested. The Sea King radio homer system utilises the lateral displacement of a vertical bar on an instrument to indicate the sense of a target relative to the aircraft heading. With the aircraft and the target vessel within the array at a range of approximately 1 nm, the homer system operated as expected with no apparent degradation.

Since the trials detailed above, no significant issues with regards to VHF DF have been observed or reported, and therefore the presence of the Proposed Development is anticipated to have no significant risk upon VHF DF equipment.

13.3 Automatic Identification System

No significant issues with interference to AIS transmission from operational offshore wind farms have been observed or reported to date. Such interference was also absent in the trials carried out at the North Hoyle Offshore Wind Farm (MCA and QinetiQ, 2004).

In theory, there could be interference when there is a structure located between the transmitting and receiving antennas (i.e. blocking line of sight) of the AIS. However, given no issues have been reported to date at operational developments or during trials, no significant risk is anticipated due to the presence of the Proposed Development.

13.4 Navigational Telex System

The Navigational Telex (NAVTEX) system is used for the automatic broadcast of localised Maritime Safety Information (MSI) and either prints it out in hard copy or displays it on a screen, depending upon the model.

There are two NAVTEX frequencies. All transmissions on NAVTEX 518 Kilohertz (kHz), the international channel, are in English. NAVTEX 518 kHz provides the mariner (both recreational and commercial) with weather forecasts, severe weather warnings, and navigation warnings such as obstructions or buoys off-station. Depending on the user’s location, other information options may be available such as ice warnings for high latitude sailing.

The 490 kHz national NAVTEX service may be transmitted in the local language. In the UK, full use is made of this secondary frequency including useful information for smaller craft, such as the inshore waters forecast and actual weather observations from weather stations around the coast.

Although no specific trials have been undertaken, no significant effect on NAVTEX has been reported to date at operational developments, and therefore no significant risk is anticipated due to the presence of the Proposed Development.

13.5 Global Positioning System

Global Positioning System (GPS) is a satellite-based navigational system. GPS trials were also undertaken throughout the 2004 trials at North Hoyle Offshore Wind Farm, and it was stated

that “no problems with basic GPS reception or positional accuracy were reported during the trials”.

The additional tests showed that “even with a very close proximity of a wind turbine to the GPS antenna, there were always enough satellites elsewhere in the sky to cover for any that might be shadowed by the wind turbine tower” (MCA and QinetiQ, 2004).

Therefore, there are not expected to be any significant risks associated with the use of GPS systems within or in proximity to the Proposed Development, noting that there have been no reported issues relating to GPS within or in proximity to any operational offshore wind farms to date.

13.6 Electromagnetic Interference

A compass, magnetic compass, or mariner's compass is a navigational instrument for determining direction relative to the earth's magnetic poles. It consists of a magnetised pointer (usually marked on the north end) free to align itself with the earth's magnetic field. A compass can be used to calculate heading, used with a sextant to calculate latitude, and with a marine chronometer to calculate longitude.

Like any magnetic device, compasses are affected by nearby ferrous materials as well as by local electromagnetic forces, such as magnetic fields emitted from power cables. As the compass still serves as an essential means of navigation in the event of power loss or as a secondary source, it is important that potential impacts from Electromagnetic Field (EMF) should be minimised to ensure continued safe navigation. The vast majority of commercial traffic uses non-magnetic gyrocompasses as the primary means of navigation, which are unaffected by EMF. Therefore, it is considered highly unlikely that any interference from EMF as a result of the presence of cables associated with the Proposed Development will have a significant impact on vessel navigation. However some smaller craft (fishing or leisure) may rely on them as their sole means of navigation

The export and inter-array cables for the Proposed Development could be Alternating Current (AC), Direct Current (DC) or a combination of both. Studies indicate that AC does not emit an EMF significant enough to impact marine magnetic compasses (Convention for the Protection of the Marine Environment of the North-East Atlantic (OSPAR), 2008).

The Moray Offshore Renewables Environmental Statement (Moray Offshore Renewables, 2012) notes that for both buried and protected DC cables the magnetic field will decrease exponentially with vertical distance from the seabed and with horizontal distance from the cables (within a few metres), irrespective of whether cables are buried or protected. It states that “in all cases, where cables are buried to 1 m depth, the predicted magnetic field is expected to be below the earth’s magnetic field (assumed to be 50 microtesla (μT)). Where DC cables cannot be buried and are instead protected, the magnetic field is expected to be below the earth’s magnetic field within 5 m from the seabed”.

The following are therefore considered to be important factors affecting the likelihood of EMF to affect compass deviation as a result of the presence of cables:

- water depth;
- burial depth (or protection);
- type of current (alternating or direct) running through the cables; and/or
- spacing or separation of the cables.

13.7 EMF from Cables Associated with the Proposed Development

Within their response (16 November 2021) to the Berwick Bank Wind Farm Scoping Report the MCA stated that a compass deviation of three degrees will be accepted for 95% of the cable route and a five degree deviation accepted for the remaining 5% (see 16 November 2021 entry in Table 4.1). Table 13.1 details assumed EMF mitigation for the Proposed Development.

Table 13.1 EMF Mitigation

Mitigation	Reasoning	Percentage of Offshore Export Cables Applied to
Use of HVAC cables	AC does not emit an EMF significant enough to impact marine magnetic compasses.	100%
Cables are installed in close proximity/bundled	Industry experiences in cable installation and offshore renewables shows that bundled cables or cables closely installed mitigate the effects of EMF (NorthConnect, 2018).	100%
Water depth >10 m	Increased water depth (vertical distance) mitigates the effects of the EMF.	Approximately 99.0% is within depths greater than 10 m CD.
Water depth >20 m	Increased water depth (vertical distance) mitigates the effects of the EMF.	Approximately 97.9% is within depths greater than 20 m CD.
Cable burial	Burial depth also increases vertical distance (minimum of 0.5 m/maximum 3 m).	95% of the offshore export cables will be buried. 15% of the offshore export cables would be protected assuming that also includes the 5% that cannot be buried.
Cable route alignment relative to passing traffic	Vessel movements in the area in the primarily pass through the Proposed Development export cable corridor perpendicular to the direction of the cables. In the nearshore area (or shallow water areas) the traffic is a mix of transiting vessels and vessels fishing within Skateraw/Torness bay.	Across 100% of the Proposed Development export cable corridor traffic is assumed to pass (in the majority) perpendicular to the cable direction. Where vessels are not transiting over the proposed cables, the amount of time each vessel is directly above the cables will be limited given the width of the cables (noting this increased horizontal distance). It is considered an unlikely event a vessel would track the route of the cable therefore this is not considered further.

Mitigation	Reasoning	Percentage of Offshore Export Cables Applied to
Width of cables	DC cables produce static magnetic fields, which decrease with (horizontal) distance from the Proposed Development export cable corridor. Therefore assuming a worst case of 450 m (assuming eight cables buried side by side with minimum 50 m spacing) compass interference would potentially only be experienced directly above or in direct proximity to the cables, noting again effects decrease quickly with horizontal distance.	100% given the effects will only be present when vessels are directly over the cable(s) or in very close (metres) proximity.

Given that 95% of the offshore export cables will be buried and 99.1% (approximately) of it in water depths greater than 10 m there are not anticipated to be any effects on compass deviation for the majority of the Proposed Development export cable corridor. Within shallow waters effects of EMF will be mitigated by the offshore export cables being either Horizontally Direction Drilled (HDD) or direct piped (within up to 1,500 m of the LAT mark and also out to a minimum of -5 m LAT) and also buried or protected as required beyond the point of emergence. As noted in Moray Offshore Renewables Environmental Statement (Moray Offshore Renewables, 2012) “where DC cables cannot be buried and are instead protected, the magnetic field is expected to be below the earth’s magnetic field within 5 m from the seabed” and there are negligible effects on magnetic compasses. Therefore, in summary based on mitigations of water depth, burial and use of HDD/direct pipes within shallow water the Proposed Development is anticipated to be within the requirements defined by the MCA.

Inter-array cables have not been considered within this section but are considered within acceptable limits given water depths within the Proposed Development array area (33 to 69 m Chart Datum) and use of burial/protection methods as required.

13.7.1 Electromagnetic Fields and Structures

MGN 654 (MCA, 2021) notes that small vessels with simple magnetic steering and hand bearing compasses should be wary of using these close to wind turbines as with any structure in which there is a large amount of ferrous material (MCA and QinetiQ, 2004). Potential effects are therefore deemed to be within acceptable levels when considered alongside other mitigation such as the mariner being able to make visual observations (not wholly reliant on the magnetic compass), lighting, sound signals and identification marking in line with MGN 654 (MCA, 2021).

13.7.2 Electromagnetic Fields to Date within Operational Offshore Wind Farms

No issues with respect to magnetic compasses have been reported to date in any of the trials (MCA and QinetiQ, 2004) carried out (inclusive of SAR helicopters) nor in any published reports from other operational offshore wind farms.

13.8 Marine Radar

This section summarises trials and studies undertaken in relation to radar effects from offshore wind farms in the UK. It is important to note that since the time of the trials and studies discussed, wind turbine technology has advanced significantly, most notably in terms of the size of wind turbines available to be installed and utilised. The use of these larger wind turbines allows for a greater spacing between wind turbines than was achievable at the time of the studies being undertaken, which is beneficial in terms of radar interference effects (and surface navigation in general) as detailed in sections 15.7.1 to 15.7.5.

13.8.1 Trials

During the early years of offshore renewables within the UK, maritime regulators undertook a number of trials (both shore-based and vessel-based) into the effects of wind turbines on the use and effectiveness of marine radar.

In 2004, trials undertaken at the North Hoyle Offshore Wind Farm (MCA, 2004) identified areas of concern regarding the potential risks to marine- and shore-based radar systems due to the large vertical extents of the wind turbines (based on the technology at that time). This resulted in radar responses strong enough to produce interfering side lobes and reflected echoes (often referred to as false targets or ghosts).

Side lobe patterns are produced by small amounts of energy from the transmitted pulses that are radiated outside of the narrow main beam. The effects of side lobes are most noticeable within targets at short range (below 1.5 nm) and with large objects. Side lobe echoes form either an arc on the radar screen similar to range rings, or a series of echoes forming a broken arc, as illustrated in Figure 13.1.

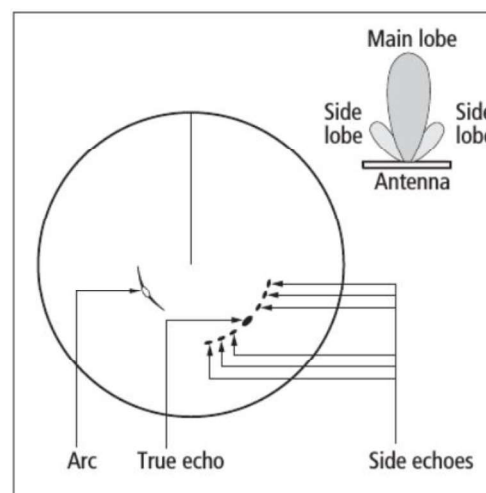


Figure 13.1 Illustration of Side Lobes on Radar Screen

Multiple reflected echoes are returned from a real target by reflection from some object in the radar beam. Indirect echoes or 'ghost' images have the appearance of true echoes but

are usually intermittent or poorly defined; such echoes appear at a false bearing and false range, as illustrated in Figure 13.2.

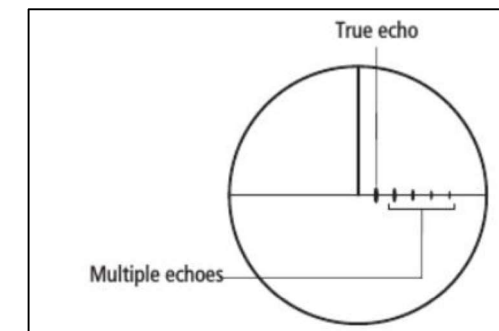


Figure 13.2 Illustration of Multiple Reflected Echoes on Radar Screen

Based on the results of the North Hoyle trials, the MCA produced a Shipping Route Template designed to give guidance to mariners on the distances which should be established between shipping routes and offshore wind farms. The latest version of the Shipping Route Template is included in MGN 654 (MCA, 2021).

A second set of trials conducted at Kentish Flats Offshore Wind Farm in 2006 on behalf of the British Wind Energy Association (BWEA) – now called RenewableUK (BWEA, 2007) – also found that radar antennas which are sited unfavourably with respect to components of the vessel's structure can exacerbate effects such as side lobes and reflected echoes. Careful adjustment of radar controls suppressed these spurious radar returns, but mariners were warned that there is a consequent risk of losing targets with a small radar cross section, which may include buoys or small craft, particularly yachts or Glass Reinforced Plastic (GRP) constructed craft; therefore, due care should be taken in making such adjustments.

Theoretical modelling of the effects of the development of the proposed Atlantic Array Offshore Wind Farm, which was to be located off the south coast of Wales, on marine radar systems was undertaken by the Atlantic Array project (Atlantic Array, 2012) and considered a wider spacing of wind turbines than were considered within the early trials. The main outcomes of the modelling were the following:

- Multiple and indirect echoes were detected under all modelled parameters.
- The main effects noticed were stretching of targets in azimuth (horizontal) and appearance of ghost targets.
- There was a significant amount of clear space amongst the returns to ensure recognition of vessels moving amongst the wind turbines and safe navigation.
- Even in the worst case with radar operator settings artificially set to be poor, there is significant clear space around each wind turbine that does not contain any multipath or side lobe ambiguities to ensure safe navigation and allow differentiation between false and real (both static and moving) targets.

- Overall, it was concluded that the amount of shadowing observed was very little (noting that the model considered lattice-type foundations which are sufficiently sparse to allow radar energy to pass through).
- The lower the density of wind turbines the easier it is to interpret the radar returns and fewer multipath ambiguities are present.
- In dense, target rich environments, S-Band radar scanners suffer more severely from multipath effects in comparison to X-Band radar scanners.
- It is important for passing vessels to keep a reasonable separation distance between the wind turbines in order to minimise the effect of multipath and other ambiguities.
- The Atlantic Array study undertaken in 2012 noted that the potential for radar interference was mainly a problem during periods of reduced visibility when mariners may not be able to visually confirm the presence of other vessels in proximity (those without AIS installed which are usually fishing and recreational craft). It is noted that this situation would arise with or without wind turbines in place.
- There is potential for the performance of a vessel's Automatic Radar Plotting Aid (ARPA) to be affected when tracking targets in or near the array. Although greater vigilance is required, during the Kentish Flats trials it was shown that false targets were quickly identified as such by the mariners and then by the equipment itself.

In summary, experience in UK waters has shown that mariners have become increasingly aware of any radar effects as more offshore wind farms become operational. Based on this experience, the mariner can interpret the effects correctly, noting that effects are the same as those experienced by mariners in other environments such as in close proximity to other vessels or structures. Effects can be effectively mitigated by “careful adjustment of radar controls”.

The MCA has also produced guidance to mariners operating in proximity to OREIs in the UK which highlights radar issues amongst others to be taken into account when planning and undertaking voyages in proximity to OREIs (MCA, 2008). The interference buffers presented in Table 13.2 are primarily based on MGN 654 (MCA, 2021) but also consider the content of MGN 371 (MCA, 2008), MGN 543 (MCA, 2016) and MGN 372 (MCA, 2008).

Table 13.2 Distances at which Risks for Marine Radar Occur

Distance at Which Risk Occurs (nm)	Identified Risks
0.5	<ul style="list-style-type: none">Intolerable risks can be experienced at under 0.5 nm.X-Band radar interference is intolerable under 0.25 nm.Vessels may generate multiple echoes on shore-based radars under 0.45 nm.

Distance at Which Risk Occurs (nm)	Identified Risks
1.5	<ul style="list-style-type: none">Under MGN 654, risks on radar are considered to be tolerable with mitigation between 0.5 and 3.5 nm.S-band radar interference starts at 1.5 nm.Echoes develop at approximately 1.5 nm, with progressive deterioration in the radar display as the range closes. Where a main vessel route passes within this range considerable interference may be expected along a line of wind turbines.The wind turbines produce strong radar echoes giving early warning of their presence.Target size of the wind turbine echo increases close to the wind turbine with a consequent degradation on both X and S-Band radars.

As noted in Table 13.2, the onset range from the wind turbines of false returns is approximately 1.5 nm, with progressive deterioration in the radar display as the range closes. If interfering echoes develop, the requirements of the Convention on International Regulations for Preventing Collisions at Sea (COLREGs) *Rule 6 Safe Speed* are particularly applicable and must be observed with due regard to the prevailing circumstances (IMO, 1972/77). In restricted visibility, *Rule 19 Conduct of Vessels in Restricted Visibility* applies and compliance with *Rule 6* becomes especially relevant. In such conditions mariners are required, under *Rule 5 Look-out* to take into account information from other sources which may include sound signals and VHF information, for example from a VTS or AIS (MCA, 2016).

13.8.2 Experience from Operational Developments

The evidence from mariners operating in proximity to existing offshore wind farms is that they quickly learn to adapt to any effects. The example of the Galloper and Greater Gabbard Offshore Wind Farms, which are located in proximity to IMO routeing measures is presented in Figure 13.3. Despite this proximity to heavily trafficked Traffic Separation Scheme lanes, there have been no reported incidents or issues raised by mariners who operate within the vicinity. The interference buffers presented in Figure 13.3 are as per Table 13.2.

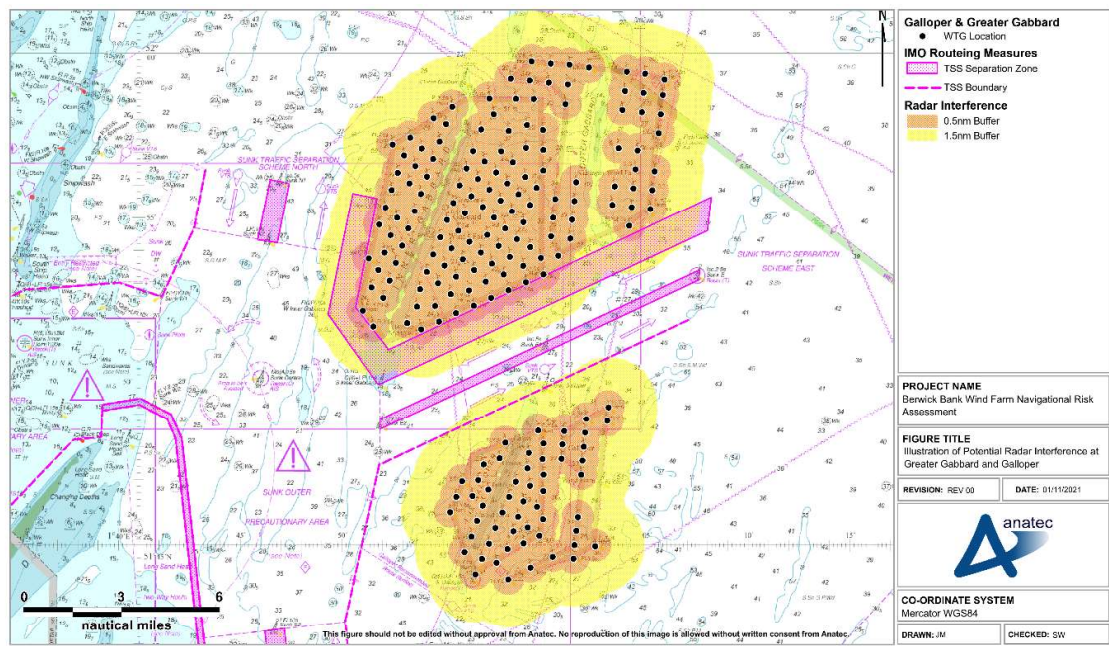


Figure 13.3 Illustration of Potential Radar Interference at Greater Gabbard and Galloper Offshore Wind Farms

As indicated by Figure 13.3, vessels utilising these Traffic Separation Scheme lanes experience some radar interference based on the available guidance. Both developments are operational, and each of the lanes is used by a minimum of five vessels per day on average. However, to date, there have been no incidents recorded (including any related to radar use), or concerns raised by the users.

AIS information can also be used to verify the targets of larger vessels (generally vessels over 15 m LOA – the minimum threshold for fishing vessel AIS carriage requirements). Approximately 15% of the vessel traffic recorded within the Proposed Development array area study area was under 15 m LOA, although throughout the vessel traffic surveys over 99% of vessels were recorded via AIS, indicating a high level of AIS take-up among vessels for which AIS carriage is not mandatory.

For any smaller vessels, particularly fishing vessels and recreational vessels, AIS Class B devices are becoming increasingly popular and allow the position of these small craft to be verified when in proximity to an offshore wind farm.

13.8.3 Increased Radar Returns

Beam width is the angular width, horizontal or vertical, of the path taken by the radar pulse. Horizontal beam width ranges from 0.75° to 5°, and vertical beam width ranges from 20° to 25°. How well an object reflects energy back towards the radar depends upon its size, shape, and aspect angle.

Larger wind turbines (either in height or width) will return greater target sizes and/or stronger false targets. However, there is a limit to which the vertical beam width would be affected (20° to 25°) dependent upon the distance from the target. Therefore, increased wind turbine height in the array will not create any effects in addition to those already identified from existing operational wind farms (interfering side lobes, multiple and reflected echoes).

Again, when taking into consideration the potential options available to marine users (such as reducing gain to remove false returns) and feedback from operational experience, this shows that the effects of increased returns can be managed effectively.

13.8.4 Fixed Radar Antenna Use in Proximity to an Operational Wind Farm

It is noted that there are multiple operational wind farms including Galloper that successfully operate fixed radar antenna from locations on the periphery of the array. These antennas are able to provide accurate and useful information to onshore coordination centres.

13.8.5 Application to the Proposed Development

Upon commissioning of the Proposed Development, some commercial vessels may pass within 1.5 nm of the wind farm structures and therefore may be subject to a minor level of radar interference. Trials, modelling, and experience from existing developments note that any risk can be mitigated by adjustment of radar controls.

An illustration of potential radar interference due to the Proposed Development and cumulative offshore wind farm developments is presented in Figure 13.4. NnG is represented by the final array layout plotted on Admiralty Charts and Seagreen is represented by the final array layout published in the Safety Zone application (Seagreen Wind Energy Ltd, 2021), whereas Inch Cape is represented by the array area boundary published by Crown Estate Scotland, noting that a final array layout has not been published at the time of writing.

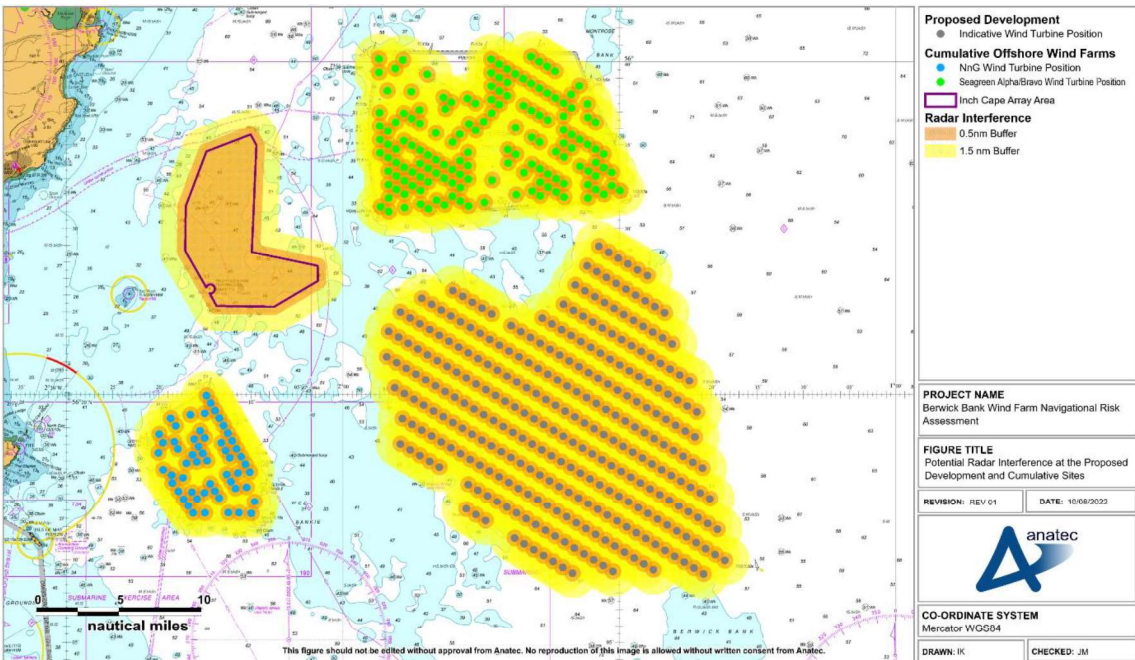


Figure 13.4 Illustration of Potential Radar Interference at the Proposed Development and Cumulative Offshore Wind Farm Developments

Vessels navigating internally within the Proposed Development array area will be subject to a greater level of radar interference, with risks becoming more substantial in close proximity to the wind turbines. This will require additional mitigation by vessels, including consideration of the navigational conditions (visibility) when passage planning and compliance with the COLREGs (IMO, 1972/77) will be essential.

For vessels transiting through the navigational corridor between the Proposed Development array area and Inch Cape, there may be a potential for increased exposure to radar interference depending upon the nature of the passage through the corridor. However, the distance and duration of the transit for which the distance from wind turbines will be less than 1.5 nm will be low and it is very unlikely that vessels will navigate within 0.5 nm of a wind turbine. Mitigations are available to vessels as listed throughout this section (e.g. adjustment of radar controls) and the risk is within parameters already safely managed at existing offshore wind farm developments.

Overall, the risk of marine radar interference is expected to be low and no further risk to navigational safety is anticipated outside the parameters which can be mitigated by operational controls. From existing experience within UK offshore wind farms, vessels do navigate safely internally within arrays including with spacing significantly less than at the Proposed Development array area.

13.9 Sound Navigation Ranging Systems

No evidence has been found to date with regard to existing offshore wind farms to suggest that Sound Navigation Ranging (SONAR) systems produce any kind of SONAR interference which is detrimental to the fishing industry, or to military systems. No risk is therefore anticipated in relation to the presence of the Proposed Development.

13.10 Noise

No evidence has been found to date with regard to existing offshore wind farms to suggest that prescribed sound signals are in any way impacted by acoustic noise produced by the wind farm.

13.11 Summary of Risk

Based on the detailed technical assessment of the effects due to the presence of the Proposed Development on navigation, communication, and position fixing equipment in the previous subsections, the assessment of frequency and consequence and the resulting significance of risk for each topic is summarised in Table 13.3.

Table 13.3 Summary of Risk on Navigation, Communication, and Position-fixing Equipment

Topic	Frequency	Consequences	Significance of Risk
VHF	Negligible	Minor	Broadly Acceptable
VHF direction finding	Extremely Unlikely	Minor	Broadly Acceptable
AIS	Negligible	Minor	Broadly Acceptable
NAVTEX	Negligible	Minor	Broadly Acceptable
GPS	Negligible	Minor	Broadly Acceptable
EMF	Extremely Unlikely	Negligible	Broadly Acceptable
Marine Radar	Remote	Minor	Broadly Acceptable
Wind turbine generated noise	Negligible	Minor	Broadly Acceptable
SONAR	Negligible	Minor	Broadly Acceptable

On the basis of the NRA findings, associated risks are screened out of **volume 2, chapter 13**.

14 Cumulative and Transboundary Overview

Cumulative risks have been considered for activities in combination and cumulatively with the Proposed Development. This section provides an overview of the baseline used to inform the cumulative risk assessment, including the developments and projects screened into the cumulative risk assessment based on the criteria outlined in section 3.3.

The outputs of the cumulative risk assessment are then provided in section 19.2.

14.1 Screened In Developments

14.1.1 Other Offshore Wind Farms

In addition to the Proposed Development, there are a number of other offshore wind farm developments in the outer Firth of Forth and Firth of Tay region and the UK east coast as a whole. Table 14.1 includes details of these offshore wind farm developments and includes the cumulative risk assessment scenario applied as well as whether each development is screened in or out of the cumulative risk assessment based on the methodology outlined in section 3.3. The project statuses are as of August 2022 when the most up-to-date vessel traffic data used to inform the baseline was collected. Additionally, although Forthwind was consented in 2016, an EIA Report for a new project design was submitted in May 2022 (Marine Scotland, 2022) following a scoping report in August 2021 and so this development is defined as scoped.

As per the methodology, any development greater than 50 nm from the Proposed Development array area is not considered.

Figure 14.1 presents the locations of the offshore wind farm developments screened into the cumulative risk assessment.

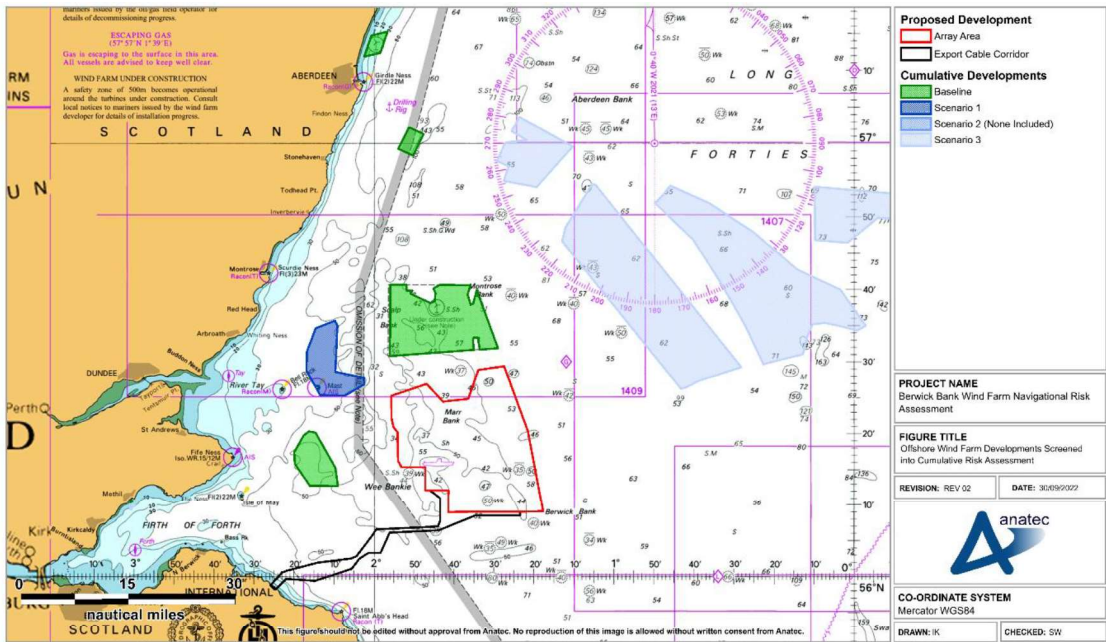


Figure 14.1 Offshore Wind Farms Developments Screened into Cumulative Risk Assessment

14.1.2 Oil and Gas Infrastructure

The only oil and gas infrastructure within 50 nm of the array site are seven wellheads, all of which are decommissioned, and therefore have no future influence of vessel movements. The closest surface oil and gas infrastructure is the *BW Catcher* FPSO at the Catcher Area Development, located approximately 73 nm to the east.

Therefore, no oil and gas infrastructure has been screened into the cumulative risk assessment.

14.1.3 Other Developments and Infrastructure

The Cambois connection is a potential secondary offshore export cable option for the Proposed Development which will connect at the southern extent of the Proposed Development array area and make landfall at Blyth on the UK east coast⁹. Given that this development will not include any surface infrastructure there is a limited pathway through which a hazard can be transmitted between the development and shipping and navigation users. Therefore, the Cambois connection is screened out of the cumulative risk assessment.

Other developments within 50 nm of the Proposed Development array area include the Inch Cape Met Mast (located approximately 8.3 nm to the west) and Energy Park Fife (located

⁹ The cumulative screening of the Cambois connection is based on information presented in the Scoping Report submitted in October 2022.

within the Firth of Forth). Both are existing developments and are therefore considered as part of the baseline.

There are no other known future developments (other than offshore wind farm developments) within 50 nm of the Proposed Development array area.

Therefore, no other developments or infrastructure has been screened into the cumulative risk assessment.

Table 14.1 Cumulative Screening

Development	Development Status	Closest Distance		Data Confidence	Scenario	Cumulative Risk Assessment Screened In/Out
		Proposed Development Array Area (nm)	Proposed Development Export Cable Corridor (nm)			
Bellrock	Area of search	46	56	Low	3	Screened in
Cambois connection	Scoped	0	0	High	N/A	Screened out – limited pathway between hazards and shipping and navigation users
Cluaran Deas Ear	Area of search	25	45	Low	3	Screened in
Energy Park Fife	Operational	37	23	High	N/A	Screened out – considered in baseline assessment
European Offshore Wind Deployment Centre	Operational	46	61	High	N/A	Screened out – considered in baseline assessment
Forthwind	Scoped	37	22	Low	3	Screened in
Inch Cape	Pre-construction	4.1	18	High	1	Screened in
Inch Cape Met Mast	Operational	10	21	High	N/A	Screened out – considered in baseline assessment
Kincardine	Operational	29	50	High	N/A	Screened out – considered in baseline assessment
Levenmouth Demonstration Turbine	Operational	38	23	High	N/A	Screened out – considered in baseline assessment

Project A4495
Client Berwick Bank Project
Title Berwick Bank Wind Farm Navigational Risk Assessment

Development	Development Status	Closest Distance		Data Confidence	Scenario	Cumulative Risk Assessment Screened In/Out
		Proposed Development Array Area (nm)	Proposed Development Export Cable Corridor (nm)			
Morven	Area of search	17	28	Low	3	Screened in
Neart na Gaoithe	Under construction	8.8	8.2	High	N/A	Screened out – considered in baseline assessment
Ossian	Area of search	34	40	Low	3	Screened in
Seagreen	Under construction	2.7	19	High	N/A	Screened out – considered in baseline assessment

14.2 Cumulative Pre-Wind Farm Routeing

Figure 14.2 presents a plot of the main commercial routes within the Proposed Development array area shipping and navigation study area (full extent) alongside the screened in cumulative developments. Descriptions of the vessel traffic on each of the main commercial routes are provided in Table 11.1.

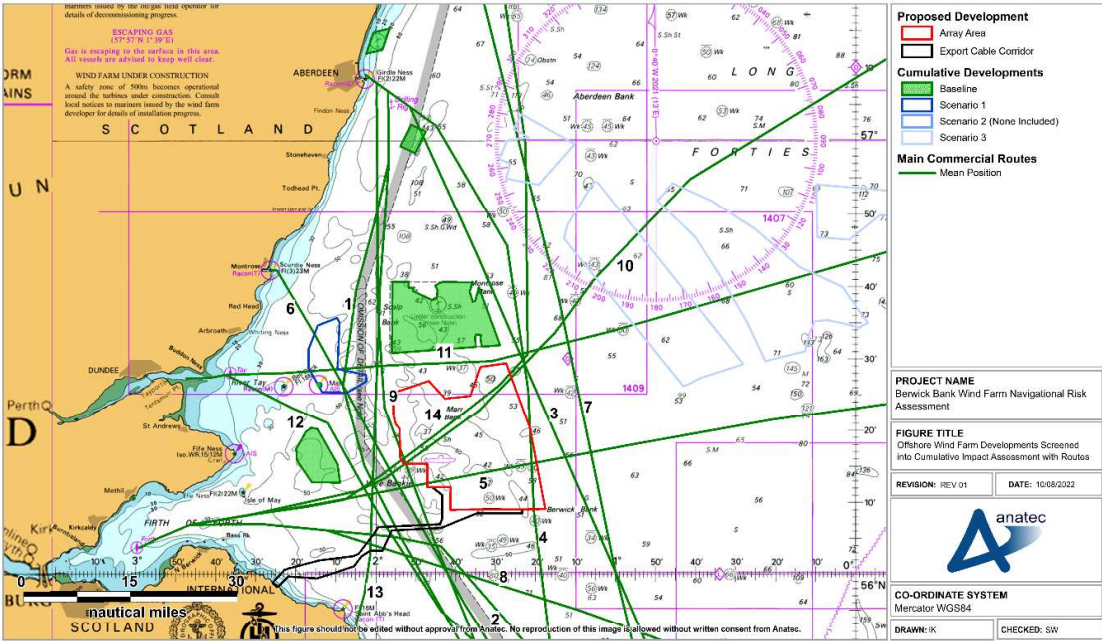


Figure 14.2 Offshore Wind Farms Developments Screened into Cumulative Risk Assessment with Main Commercial Routes (Pre Wind Farm)

Table 14.2 summarises which main commercial routes interact with which cumulative developments (i.e. are defined as requiring a deviation due to the future presence of a cumulative development). As per the methodology for re-routeing due to the Proposed Development in isolation (see section 15.5.1), it has been assumed that any main commercial route within 1 nm of an offshore installation will require a deviation.

Table 14.2 Anticipated Cumulative Routeing Interaction with Cumulative Developments

Route Number	Average Vessels Per Day	Main Ports	Interaction with Cumulative Developments			
			Inch Cape	Morven	Cluaran Deas Ear	Ossian
1	1–2	Aberdeen–Humber ports	✓			
6	0–1	Montrose–Rotterdam	✓			
7	0–1	Invergordon–Humber ports			✓	
10	0–1	Forth ports–north Norway ports		✓		✓
11	0–1	Dundee–Baltic ports	✓	✓		✓
14	0–1	Forth ports–Pennsylvania			✓	

In summary, three routes are anticipated to require a deviation due to the additional presence of Inch Cape (Scenario 1). There are no Scenario 2 developments and therefore no further deviations are considered noting that, as per the cumulative risk assessment methodology, Scenario 3 developments are considered only qualitatively and at a high level due to the limited information available.

15 Future Case Vessel Traffic

This section presents the future case level of activity within and in proximity to the Proposed Development and the anticipated shift in the mean positions of the main commercial routes post wind farm.

The future case activity and routeing has been fed into the collision and allision risk modelling. The future case is considered throughout the risk assessment undertaken in **volume 12, chapter 13** where future case refers to the assessment of risk based upon the predicted growth in future shipping densities and traffic types. The future case also refers to foreseeable changes in the marine environment, as discussed in the following subsections.

15.1 Increases in Commercial Vessel Activity

Forth Ports are the port operator for the major ports within the Forth including Grangemouth, Dundee, Leith and Rosyth. Given the influence of ports within the Firth of Forth and Firth of Tay in relation to vessel traffic movements within and in proximity to the Proposed Development, Forth Ports were consulted regarding future case traffic levels.

Forth Ports indicated that no terminal or berth changes are planned that may affect vessel traffic in the future with vessel numbers expected to remain reasonably consistent. Additionally, there are no commercial ferry routes planned. If anything, over the next five years any volume changes out of the Firth of Forth are likely to be decreases and beyond five years is difficult to forecast. At the Port of Dundee there is a lease for development relating to an offshore wind base.

The Scottish Whitefish Producers Association indicated that once Aberdeen South Harbour is operational there could be an increase in cruise traffic through the region.

In the longer-term, there may be increases in wind farm related traffic associated with the ScotWind developments north and east of the Proposed Development. This was raised during consultation, with the potential for terminals within the Forth to be used. However, given the low data confidence associated with these developments it is not possible to make any quantitative assumptions.

Given the uncertainty associated with long-term predictions of vessel traffic growth, as indicated by Forth Ports, two conservative and independent scenarios of potential growth in commercial vessel movements of 10% and 20% have been estimated throughout the lifetime of the Proposed Development. In reality, future case traffic growth is likely to fluctuate depending on seasonality and cargo and industry trends.

15.2 Increases in Commercial Fishing Vessel Activity

There is similar uncertainty associated with long-term predictions for commercial fishing vessel transits given the limited reliable information on future trends upon which any firm assumption can be made. Therefore, again to ensure a conservative approach, 10% and 20% growths in commercial fishing vessel movements have been estimated throughout the

lifetime of the Proposed Development. Changes in commercial fishing activity are considered further in **volume 2, chapter 12**.

15.3 Increases in Recreational Vessel Activity

There are no known major developments which will increase the activity of recreational vessels in the region. As with commercial fishing vessels, given the limited reliable information on future trends, conservative 10% and 20% growths in recreational vessel movements have been estimated throughout the lifetime of the Proposed Development.

15.4 Increases in Traffic Associated with Project Operations

The anticipated number of vessels associated with the Proposed Development during the construction and operation and maintenance phases are presented in section 6.5.

15.5 Commercial Traffic Routeing (Project in Isolation)

15.5.1 Methodology

It is not possible to consider all potential alternative routeing options for commercial traffic and therefore alternatives have been considered where possible in consultation with operators. Assumptions for re-routeing include:

- All alternative routes maintain a minimum mean distance of 1 nm from offshore installations and existing offshore wind farm boundaries in line with industry experience. This distance is considered for shipping and navigation from a safety perspective as explained below; and
- All mean routes take into count sandbanks, aids to navigation and known routeing preferences.

Additionally, some routes which pass at a mean distance greater than 1 nm are sufficiently wide that there may be some interaction with the offshore wind farm boundaries (within the 90th percentile range). In such instances the width of the route has been reduced within reason and if required the mean position of the route has been shifted to a distance further from the offshore wind farm boundary to ensure there is no direct interaction.

Annex 1 of MGN 654 defines as methodology for assessing passing distance from offshore wind farm boundaries but states that it is *“not a prescriptive tool but needs intelligent application”*.

To date, internal and external studies undertaken by Anatec on behalf of the UK Government and individual clients show that vessels do pass consistently and safely within 1 nm of established offshore wind farms (including between distinct developments) and these distances vary depending upon the sea room available as well as the prevailing conditions. This evidence also demonstrates that the Mariner defines their own safe passing distance based upon the conditions and nature of the traffic at the time, but they are shown to frequently pass 1 nm off established developments.

Evidence also demonstrates that commercial vessels do not transit through arrays and this has been supported by feedback from Regular Operators during consultation (see 24 September 2021, 27 September 2021 and 1 October 2021 entries in Table 4.1).

The NRA also aims to establish the maximum design scenario based on navigational safety parameters, and when considering this the most conservative realistic scenario for vessel routing is considered to be when main commercial routes pass 1 nm off developments. Evidence collected during numerous assessments at an industry level confirms that it is a safe and reasonable distance for vessels to pass; however, it is likely that a large number of vessels would instead choose to pass at a greater distance depending upon their own passage plan and the current conditions. One such example is Evergas, who have indicated during consultation (via charted passage plans) that they will pass further than 1 nm off the Proposed Development Array Area. This has been accounted for when establishing the main commercial route deviations (specifically for Route 14).

15.5.2 Main Commercial Route Deviations

An illustration of the anticipated worst case shift in the mean positions of the main commercial routes within the Proposed Development array area study area following the development of the Project is presented in Figure 15.1. These deviations are based on Anatec’s assessment of the maximum design scenario including the outputs of consultation.

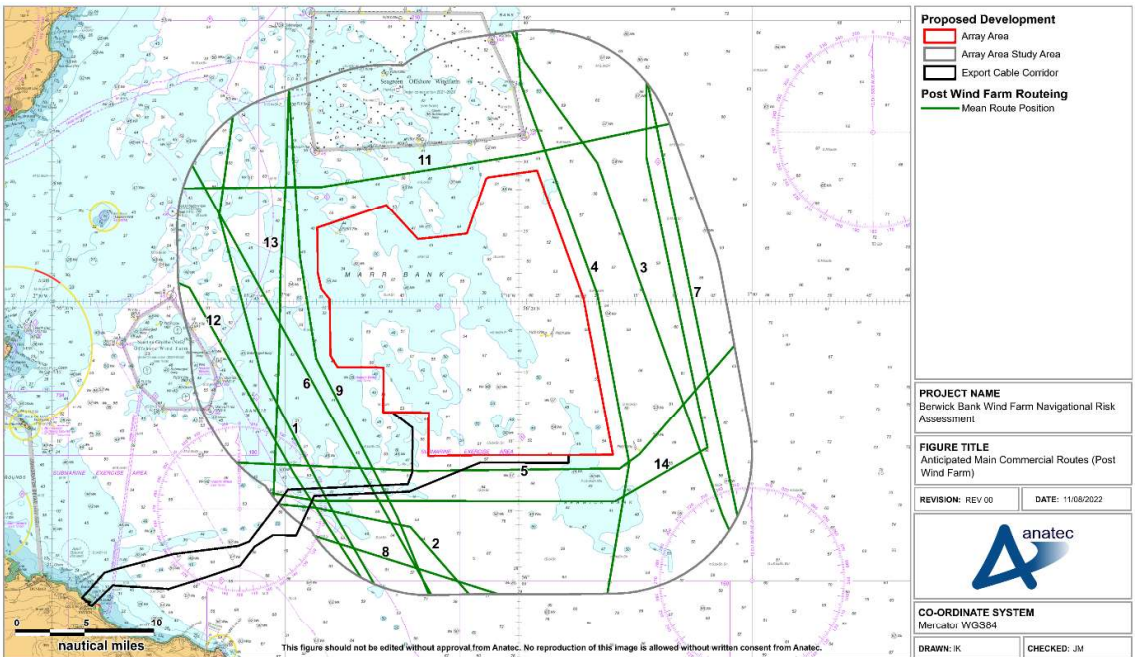


Figure 15.1 Anticipated Main Commercial Routes within Proposed Development Array Area Study Area (Post Wind Farm)

Deviations from the pre wind farm scenario would be required for seven out of the 14 main commercial routes identified, with the level of deviation varying between a 0.1 nm decrease

for Route 4 and a 26.0 nm increase for Route 14. For the displaced routes, the increase in distance from the pre wind farm scenario is presented in Table 15.1.

Table 15.1 Summary of Post Wind Farm Main Commercial Route Deviations within Study Area

Route Number	Increase in Route Length (nm)	Percentage Change in Total Route Length (%)	Nature of Deviation
3	0.3	0.1	Passing slightly further east of the Proposed Development array area.
4	-0.1	<0.1	Passing slightly further east of the Proposed Development array area.
5	3.4	0.8	Passing south of the Proposed Development array area.
9	0.2	0.1	Passing slightly further west of the Proposed Development array area.
10	0.8	0.2	Passing northwest of the Proposed Development array area (beyond the study area).
11	<0.1	<0.1	Slight course adjustment for passing between the Proposed Development array area and Seagreen.
14	26.0	0.8	Passing south of the Proposed Development array area.

In the case of Route 14, although the increase in route length is very high, since this is a transatlantic route the percentage change in the total route length is relatively low. Moreover, there will be large periods where vessels on this route are in open seas and should be able to make up any time losses incurred due to the deviations.

In the case of Route 11, although the deviation is negligible, the route does pass through the gap between the Proposed Development array area and Seagreen. This gap has variable width; at the western extent the minimum width is approximately 6.0 nm and at the eastern extent is approximately 2.8 nm. Usage of Route 11 is very low (an average of less than one vessel per day) and so the likelihood of an encounter between vessels is very low. Additionally, given the width of the gap there is sufficient sea room to allow a vessel navigating within to maintain a minimum distance of 1 nm from wind farm structures,

minimising allision risk. Additionally, with the additional presence of Inch Cape immediately west of the gap, mariners are expected to choose a routeing option passing north of Inch Cape and Seagreen rather than utilise the gap (see section 15.6.6).

15.6 Commercial Traffic Routeing (Cumulative)

15.6.1 Methodology

Given the complex nature of the cumulative scenario (in terms of the influence of cumulative developments and number of affected main commercial routes), each of the leading routeing options is considered individually on a cumulative level. This allows full consideration of the various options available.

Consultation feedback with regards to likely vessel behaviour (see section 4.2) has been incorporated where appropriate including specific behaviour by vessel type and size.

This approach has been applied to the relevant cumulative risk assessment scenarios where a quantitative approach is required, i.e., Scenario 1 and Scenario 2 developments (see section 3.3), noting that no developments were screened into Scenario 2.

15.6.2 Main Commercial Routeing Between Forth Ports and Northern Ports

This subsection considers main commercial routeing between ports located within the Firth of Forth and UK ports located north of the Firth of Forth and Firth of Tay, such as Aberdeen and Invergordon. Figure 15.2 presents two example routes for the pre wind farm scenario together with the baseline, Scenario 1 and Scenario 2 developments.

The route passing south of NnG is Route 14 from section 11.2. The route passing north of NnG is not represented in the analysis of pre wind farm routeing for the Proposed Development in isolation since it is located outside the Proposed Development array area study area and is therefore not characterised by the vessel traffic survey data nor affected by the presence of the Proposed Development in isolation. However, from Anatec’s ShipRoutes database it is known that this coastal route, transited by an average of one vessel per day, exists and as discussed below vessels on this route are considered potential users of the navigation corridor between the Proposed Development array area and Inch Cape.

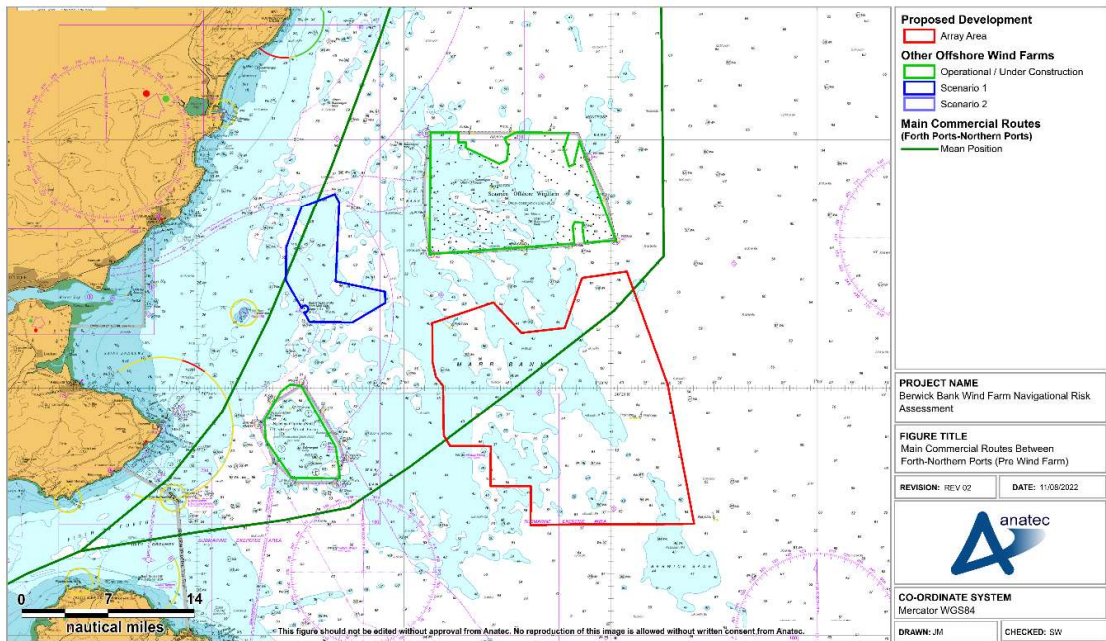


Figure 15.2 Examples of Pre Wind Farm Main Commercial Routes Between Forth Ports and Northern Ports

Based on Anatec’s ShipRoutes database, the majority of commercial vessels associated with the example routeing passing north of NnG are commercial vessels less than 150 m in length. Based on a review of the vessel traffic data, the vessels passing south on the associated routeing largely comprise tankers in the 100 to 200 m range.

With the presence of Scenario 1 developments (Inch Cape) in addition to baseline developments and the Proposed Development, a deviation will be required for north-south routeing out of the Firth of Forth which passes north of NnG. There are three clear options as illustrated in Figure 15.3 and detailed in the text that follows.

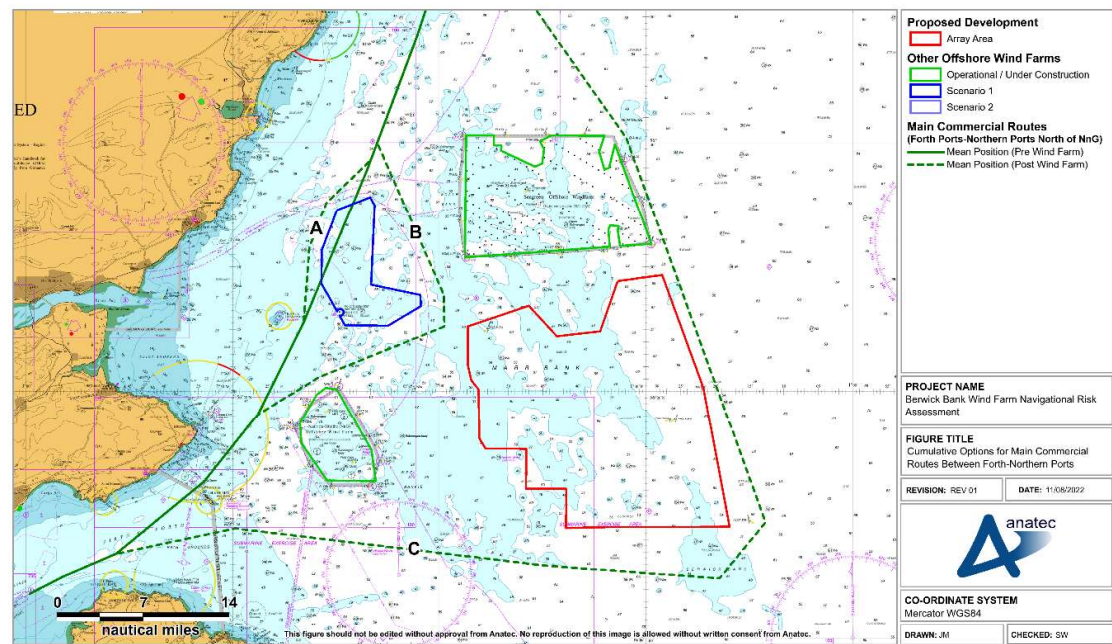


Figure 15.3 Cumulative Options for Main Commercial Routes Between Forth Ports and Northern Ports Passing North of NnG

- **Pass inshore of Inch Cape (option A)** – this option would involve vessels making a change in course to pass between Bell Rock and Inch Cape, resulting in a small deviation.
 - Vessels in transit on the relevant routes include commercial vessels; however charted water depths (30 to 40 m contours) could be considered suitable for such a deviation, noting the following factors that would make such navigation unsuitable for vessels carrying hazardous cargoes:
 - Proximity to shore and shallows;
 - Potential for failures; and
 - The approaches to the Firth of Tay and subsequent interaction with other vessel traffic.
 - The need for additional course adjustments and proximity to surface piercing features to both port and starboard result in this option increasing collision and allision risk for passing vessels.
 - This option would not be suitable for vessels that are not already passing Bell Rock at this proximity.
 - Forth Ports noted that they may also have to contact vessels asking for intentions if vessels shifted to this option (see section 4).
 - This option may increase encounters with recreational vessels, noting that it was raised during consultation (see section 4) that the presence of coastal fishing pots may displace recreational vessels into deviated commercial vessels.
- **Utilise the navigation corridor between the Proposed Development array area and Inch Cape (option B)** – this option would involve vessels passing closer to the northern

boundary of NnG and then steering a course through the navigation corridor, resulting in a moderate deviation.

- The proximity to surface piercing features to both port and starboard result in this option introducing increased collision and allision risk for passing vessels. However, the width and shape of the navigation corridor results in the number of additional course adjustments required being similar to the other options and the navigation corridor is MGN 654 compliant.
- The presence of small craft operating within or in proximity to the navigation corridor may increase potential collision risk with commercial vessels (noting the associated routing included large commercial vessels), noting this may discourage small craft from operating in proximity to the navigation corridor.
- **Pass offshore of the Proposed Development array area (option C)** – this option would involve vessels passing around the south and east of the Proposed Development array area, resulting in a very large deviation.
 - Vessels using this option would be more exposed to adverse weather given the greater distance from the UK east coast. However, there is sufficient available sea room to the south and east of the Proposed Development array area and Seagreen to ensure that a safe distance can be maintained from wind farm structures, and so collision and allision risk is considered to be low.

For north-south routing out of the Firth of Forth which passes south of NnG, the available options are considered equivalent to those outlined above for north-south routing out of the Firth of Forth which passes north of NnG, as illustrated in Figure 15.4 and detailed in the text that follows.

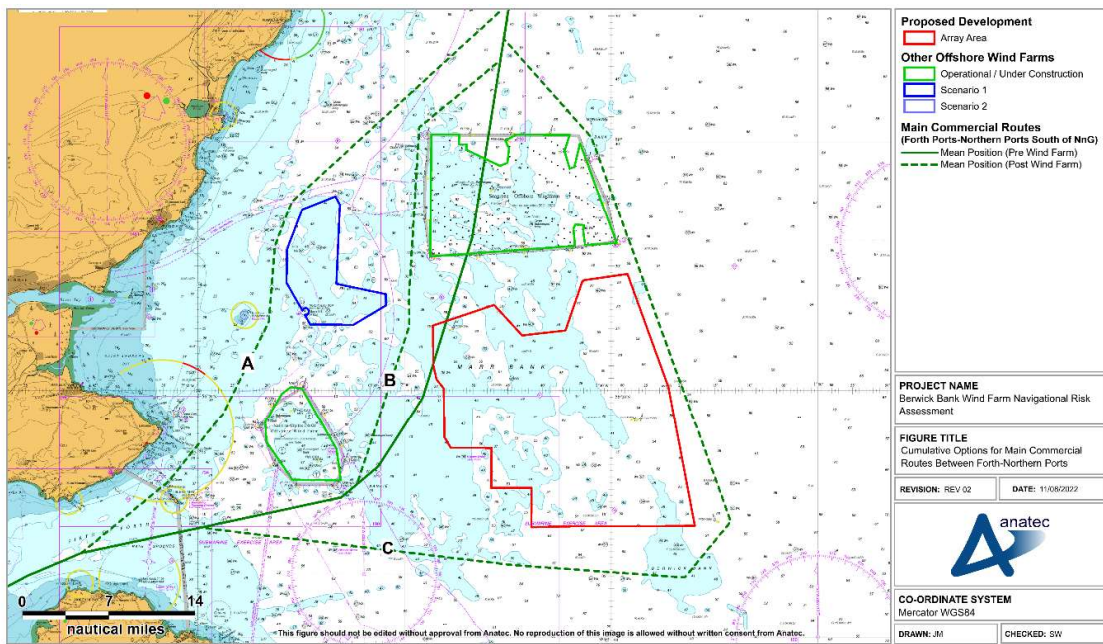


Figure 15.4 Cumulative Options for Main Commercial Routes Between Forth Ports and Northern Ports Passing South of NnG

- **Pass inshore of Inch Cape (option A)** – this option would involve vessels passing north of the Isle of May and inshore of Inch Cape, resulting in a large deviation.
 - This option is considered less feasible in this instance since passing north of the Isle of May requires navigating in shallower water where fishing pots are known to be present or making a sharp turn once beyond the two special marks located east of the Isle of May.
 - Vessels on this route include gas carriers with flammable cargoes that may not wish to use this route due to the potential for machinery failure closer to shore. Their own risk assessments (standing orders) may also prevent them passing closer to the shore.
 - From consultation with the RNLI, the increase in commercial vessel movements inshore of Inch Cape could increase the occurrence of incidents between Arbroath and Anstruther, especially in relation to leisure craft.
- **Utilise the navigation corridor between the Proposed Development array area and Inch Cape (option B)** – this option would involve vessels steering a course through the navigation corridor, resulting in a small deviation.
 - This option is considered more feasible in this instance since vessels will have better alignment with the navigation corridor after making a turn to port around NnG, with limited further course adjustments required.
 - The proximity to surface piercing features to both port and starboard result in this option introducing increased collision and allision risk for passing vessels. However, this may be mitigated by the navigation corridor being MGN 654 compliant.
 - The note on gas carriers for option A is again relevant here.
- **Pass offshore of the Proposed Development array area (option C)** – this option would involve vessels passing around the south and east of the Proposed Development array area resulting in a large deviation.
 - As per the equivalent option for north-south routeing out of the Firth of Forth, noting that a Regular Operator on this route indicated during consultation that their vessels would opt for this option given the navigational safety risks associated with the other options.

In summary, a safe deviation is available for vessels routeing between the Firth of Forth and northern ports. This can be achieved either by passing offshore of the Proposed Development array area or utilising the MGN 654 compliant navigation corridor. Although use of the navigation corridor will result in some increases in collision and allision risk, the size of the deviation associated with this routeing option is small compared with the very large deviation associated with passing offshore of the Proposed Development array area.

15.6.3 Main Commercial Routeing Between Forth Ports and Eastern Ports

This subsection considers main commercial routeing between ports located in the Firth of Forth and mainland European ports located in Norway and the Baltic region. Figure 15.5 presents two example routes for the pre wind farm scenario together with the baseline,

Scenario 1 and Scenario 2 developments. These are based on Routes 5 and 10 from section 11.2.

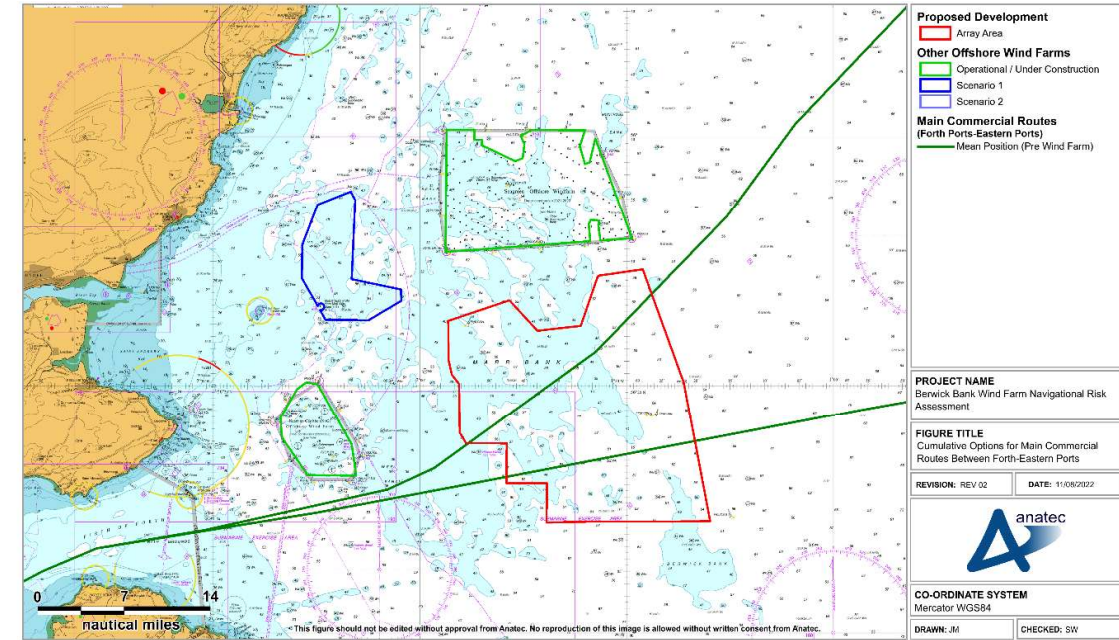


Figure 15.5 Examples of Pre Wind Farm Main Commercial Routes Between Forth Ports and Eastern Ports

Based on a review of the vessel traffic data, the majority of commercial vessels associated with the example routeing are commercial vessels in the 100 to 200 m range. However, larger vessels are present including passenger vessels and tankers in excess of 200 m.

With the presence of Scenario 1 developments (Inch Cape) in addition to baseline developments and the Proposed Development, a deviation would be required for east-west routeing out of the Firth of Forth. There are three clear options as illustrated in Figure 15.6 and detailed in the text that follows. This figure also shows the worst case pre wind farm route.

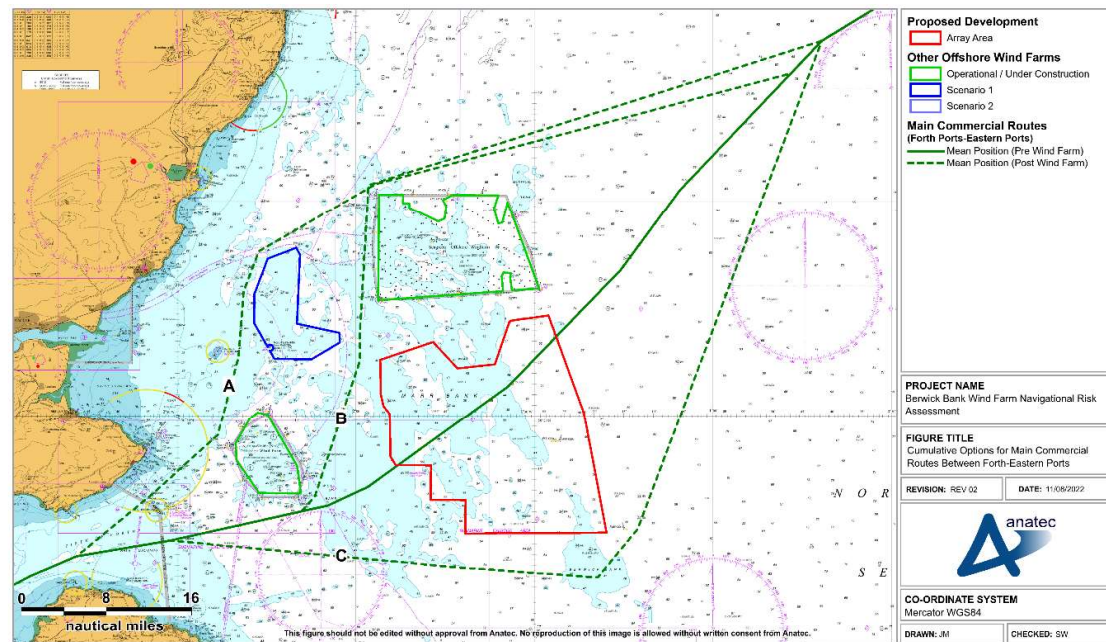


Figure 15.6 Cumulative Options for Main Commercial Routes Between Forth Ports and Eastern Ports

- **Pass inshore of Inch Cape (option A)** – this option would involve vessels passing between Bell Rock and Inch Cape, resulting in a large deviation.
 - Water depths are suitable for such a deviation including for the large commercial vessels present.
 - Since these vessels do not currently pass in proximity to Bell Rock it is unlikely to be favoured by mariners.
 - Since this option passes in proximity to both Inch Cape and Seagreen there is also an increased collision and allision risk, which could increase due to the presence of coastal cruising routes for small craft.
- **Utilise the navigation corridor between the Proposed Development array area and Inch Cape (option B)** – this option would involve vessels passing around the south of NnG and then steering a course through the navigation corridor, resulting in a large deviation.
 - The proximity to surface piercing structures to both port and starboard result in this option introducing increased collision and allision risk for passing vessels. However, the width and shape of the navigation corridor results in the number of additional course adjustments required being similar to option A and the navigation corridor is MGN 654 compliant. However, this option is more complex to navigate than option C.
 - The presence of small craft operating within or in proximity to the navigation corridor may increase collision risk with commercial vessels (noting the associated routeing included large commercial vessels), noting this may discourage small craft from operating in proximity to the navigation corridor.

- **Pass offshore of the Proposed Development array area (option C)** – this option would involve vessels passing south of the Proposed Development array area, resulting in a large deviation.
 - Vessel schedules could be compromised, although given that the route heads into the open Northern and Central North Sea there is likely to be sufficient opportunity to make up time and soften the extent of the deviation.

In summary, a safe deviation is available for vessels routeing between the Firth of Forth and eastern ports. This can be achieved either by passing offshore of the Proposed Development array area or by utilising the MGN 654 compliant navigation corridor. Given that the size of the deviation associated with these options is similar, it is more likely that mariners will choose to pass offshore of the Proposed Development array area, noting that this option also minimises increases in collision and allision risk.

15.6.4 Main Commercial Routeing Between Forth Ports and Southern Ports

This subsection considers main commercial routeing between ports located within the Firth of Forth and European ports located in the Southern North Sea, such as Antwerp and Hamburg. Figure 15.7 presents two example routes for the pre wind farm scenario – both on a straight east/west course out of the Forth and passing south of the Proposed Development and NnG – together with the baseline, Scenario 1 and Scenario 2 developments. These are based on Routes 2 and 8 from section 11.2.

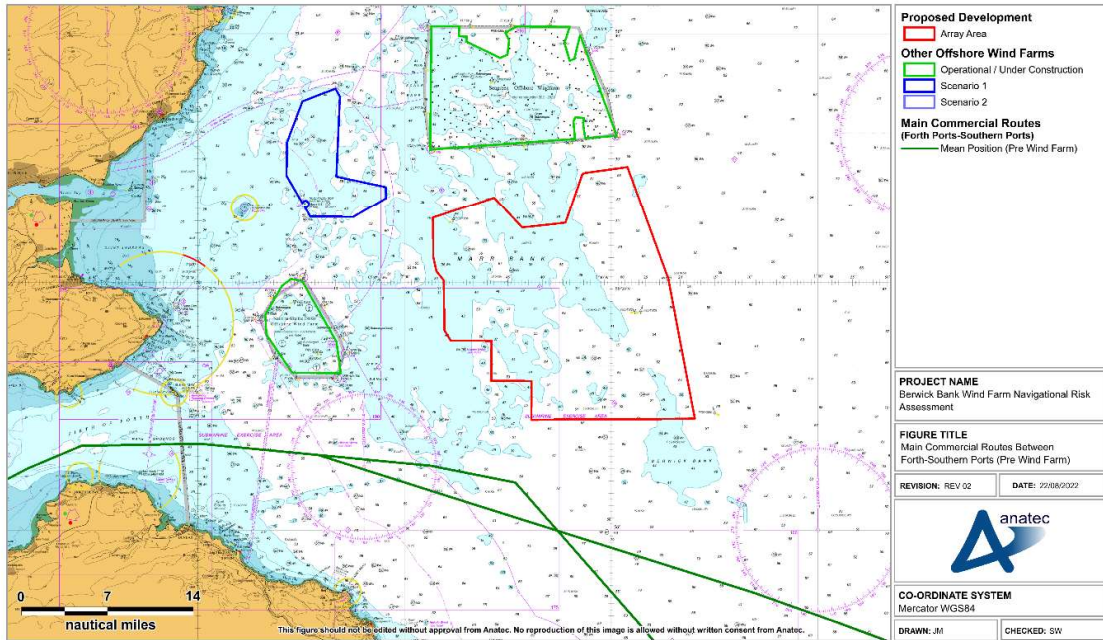


Figure 15.7 Examples of Pre Wind Farm Main Commercial Routes Between Forth Ports and Southern Ports

The majority of vessels on the associated example routeing were tankers. This included large tankers in excess of 300 m in length, however the majority were less than 200 m.

With the presence of Scenario 1 developments (Inch Cape) in addition to baseline developments and the Proposed Development there is not expected to be any deviation required for routing out of the Forth and headed into the Southern North Sea, owing to the distance from Scenario 1 developments.

15.6.5 Main Commercial Routeing North-South Following UK East Coast

This subsection considers main commercial routeing between ports located on the UK east coast, such as Aberdeen and ports in the Humber. Figure 15.8 presents two example routes for the pre wind farm scenario – one on a relatively straight north-south course passing towards the eastern extent of the Proposed Development array area and one on a curved course following the UK east coast passing west of the Proposed Development array area and through Inch Cape – together with the baseline, Scenario 1 and Scenario 2 developments. These are based on Routes 1 and 4 from section 11.2, although also bear similarities to Routes 3 and 9.

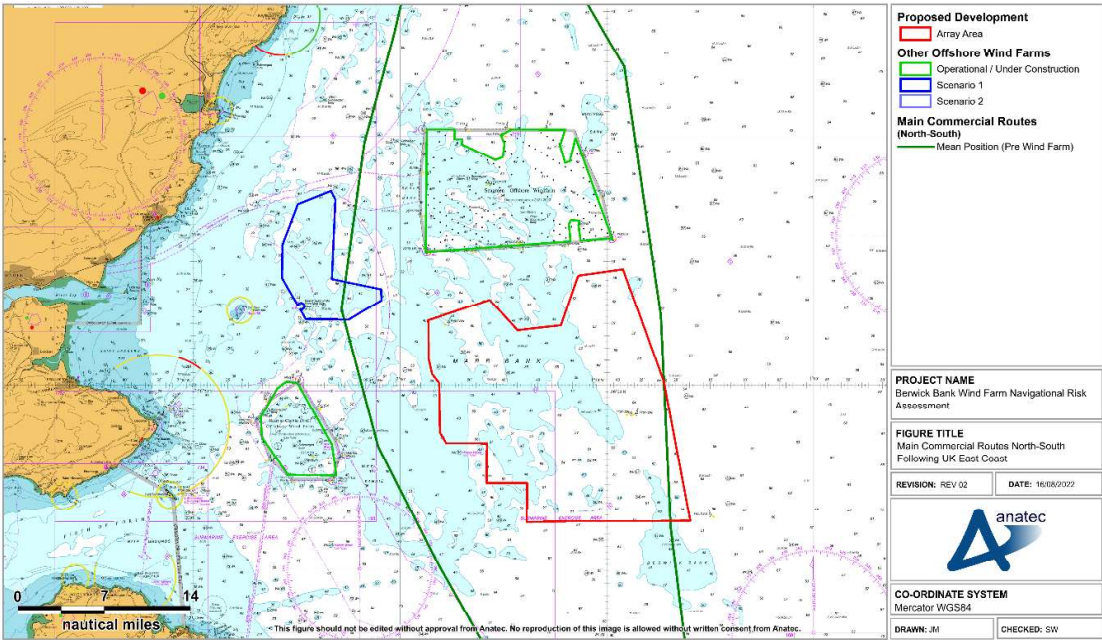


Figure 15.8 Examples of Pre Wind Farm Main Commercial Routes North-South Following UK East Coast

The majority of vessels on the associated example routeing were commercial vessels of less than 100 m in length, however larger vessels were also present on the routeing further offshore.

With the presence of Scenario 1 developments (Inch Cape) in addition to baseline developments and the Proposed Development a deviation will be required for more westerly routeing. There are three clear options as illustrated in Figure 15.9 and detailed in the text that follows.

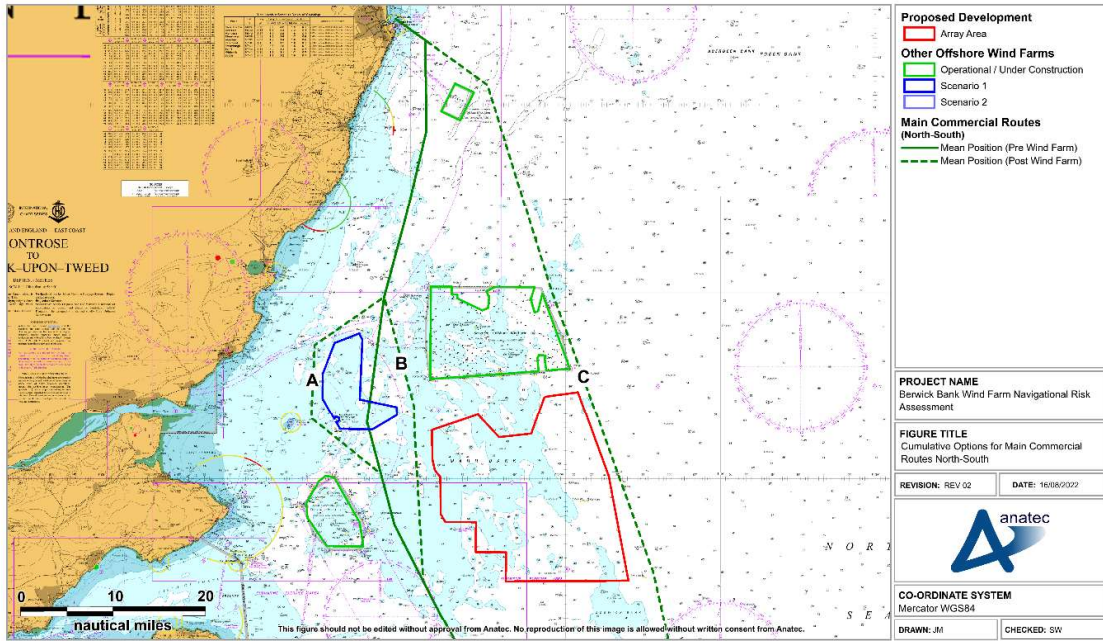


Figure 15.9 Cumulative Options for Main Commercial Routes North-South Following UK East Coast

- **Pass inshore of the Proposed Development array area and Inch Cape (option A)** – this option would involve vessels passing between Bell Rock and Inch Cape, resulting in a moderate deviation.
 - Water depths are suitable for such a deviation for the relevant vessels.
 - Since these vessels do not currently pass in proximity to Bell Rock it is unlikely to be favoured by mariners.
 - Since this option passes in proximity to both Inch Cape and Seagreen there is also an increased collision and allision risk, which could increase due to the presence of coastal cruising routes for small craft.
 - Forth Ports would have to contact vessels asking for intentions if vessels shifted to this option (see section 4.2).
 - This deviation may increase encounters with recreational vessels, noting that it was raised during consultation (see section 4.2) that the presence of coastal pots may ‘push’ recreational vessels into deviated commercial vessels.
- **Utilise the navigation corridor between the Proposed Development array area and Inch Cape (option B)** – this option would involve vessels steering a course through the navigation corridor, resulting in a small deviation.
 - The proximity to surface piercing features to both port and starboard result in this option introducing increased collision and allision risk for passing vessels. However, the width and shape of the navigation corridor results in the number of additional course adjustments required being similar to the pre wind farm route and the navigation corridor is MGN 654 compliant.
 - There is a risk for larger vessels utilising this option in adverse weather associated with under keel clearance from the shallow Marr Bank although

given that the associated depths are similar to those navigated on the pre wind farm route the additional risks are considered minimal.

- The presence of small craft operating within or in proximity to the navigation corridor may also increase collision risk with commercial vessels, which may discourage small craft from operating in proximity to the navigation corridor. However, during consultation it was indicated that recreational vessels operating a north-south transit may choose to navigate internally within the eastern portion of Inch Cape (depending on layout), thus avoiding the navigation corridor and reducing collision risk involving recreational vessels.
- **Pass offshore of the Proposed Development array area (option C)** – this option would involve vessels passing around the east of the Proposed Development array area, likely resulting in a decrease in the route length.
 - Vessels using this option would be more exposed to adverse weather given the greater distance from the UK east coast. Given the curved course of this route in the pre wind farm scenario, it is assumed that using the UK east coast as shelter is a key justification for the choice of longer passage and therefore use of this option would not be preferable.
 - This option would likely involve passing offshore of Kincardine, potentially increasing adverse weather exposure.

In summary, a safe deviation is available for vessels routeing north-south following the UK east coast. This can be achieved either by passing offshore of the Proposed Development array area or utilising the MGN 654 compliant navigation corridor. Given that the offshore option results in a shorter passage distance and minimises collision and allision risk it is more likely that mariners will choose to pass offshore of the Proposed Development array area in standard weather conditions, noting that this option also minimises increases in collision and allision risk. However, some vessels may prefer to utilise the navigation corridor given that this option retains a passage closer to the coast, particularly in adverse weather conditions.

For more easterly routeing in a north-south direction, there is not anticipated to be any deviation in addition to those anticipated for the Project in isolation scenario, owing to the distance from Inch Cape and the assumption that such vessels will make a small deviation east of the Proposed Development array area.

15.6.6 Main Commercial Routeing Between Dundee and Eastern Ports

This subsection considers main commercial routeing between Dundee and mainland European ports located in the Baltic region. Figure 15.10 presents an example route for the pre wind farm scenario passing north of the Proposed Development array area, together with the baseline, Scenario 1 and Scenario 2 developments. This is based on Route 11 from section 11.2.

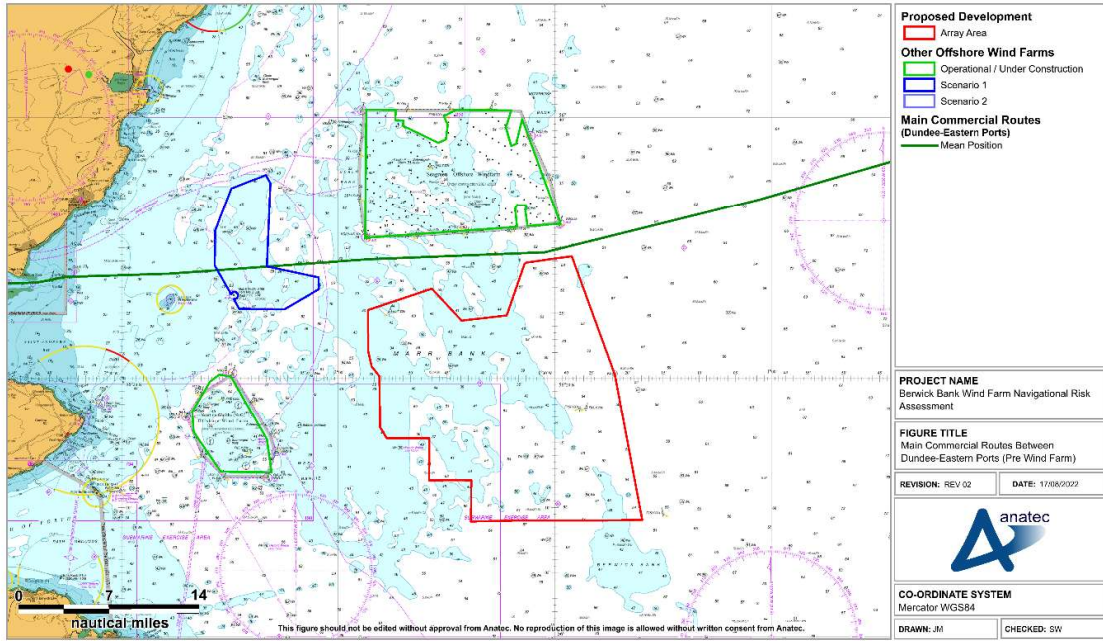


Figure 15.10 Example of Pre Wind Farm Main Commercial Route Between Dundee and Eastern Ports

The majority of vessels on the associated example routeing were commercial vessels of less than 100 m in length, however larger vessels were also present.

With the presence of Scenario 1 developments (Inch Cape) in addition to baseline developments and the Proposed Development, a deviation would be required. There is one clear option as illustrated in Figure 15.11 and detailed in the text that follows.

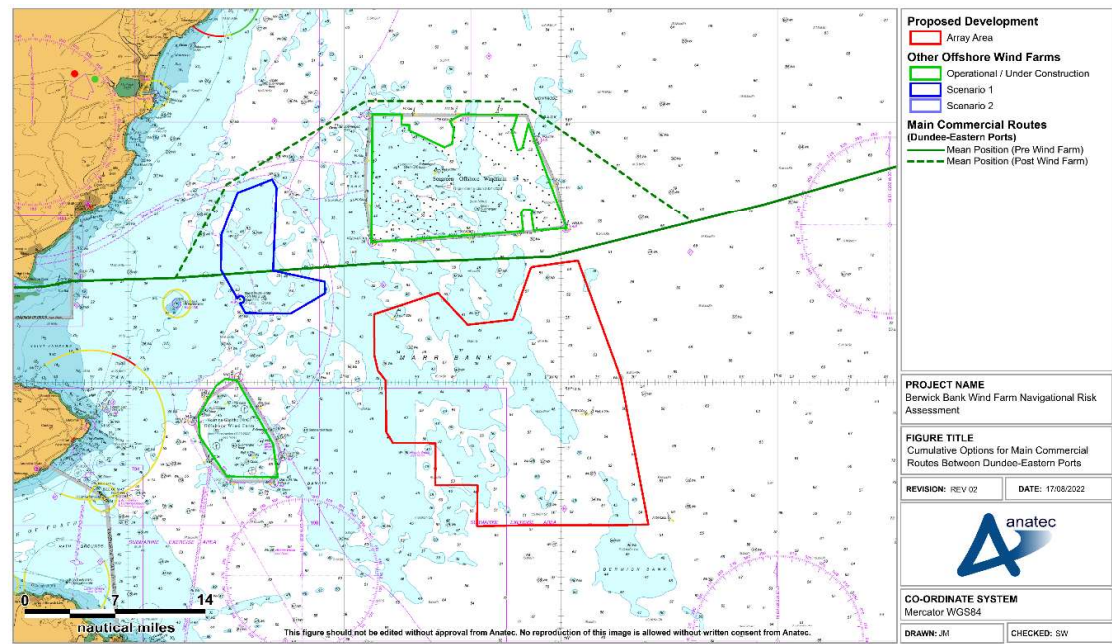


Figure 15.11 Cumulative Options for Main Commercial Routes Between Dundee and Eastern Ports

- **Pass north of Inch Cape and Seagreen** – this option would involve vessels passing around Seagreen, resulting in a large deviation.
 - Water depths are suitable for such a deviation and there is sufficient available sea room west and north of Inch Cape to ensure a safe distance can be maintained from the wind farm structures. Therefore, collision and allision risk is considered to be low.
 - Additionally, Regular Operator consultation feedback from HAV Ship Management indicated that when considering the cumulative scenario there are no safety problems foreseen for their vessels – which operate on such a route out of Dundee – including in adverse weather conditions.

In summary, a safe deviation is available for vessels routeing between Dundee and eastern ports. This can be achieved by passing north of Inch Cape and Seagreen. Although a longer passage, this option minimises collision and allision risk and, once the route reaches the open Central North Sea, there is likely to be sufficient opportunity to make up time and soften the extent of the deviation.

16 Collision and Allision Risk Modelling

16.1 Overview

To inform the risk assessment, a quantitative assessment of some of the major hazards associated with the Proposed Development has been undertaken. The following subsections outline the inputs and methodology used for the collision and allision risk modelling.

16.1.1 Scenarios Under Consideration

For each element of the quantitative assessment, both a pre and post wind farm scenarios with base and future case traffic levels have been considered. As a result, six distinct scenarios have been modelled:

- Pre wind farm with base case traffic levels;
- Pre wind farm future case with a 10% increase on base case traffic levels;
- Pre wind farm future case with a 20% increase on base case traffic levels;
- Post wind farm with base case traffic levels;
- Post wind farm future case with a 10% increase on base case traffic levels; and
- Post wind farm future case with a 20% increase on base case traffic levels.

The results of the base case scenarios are detailed in full in the following subsections, with the equivalent results for each future case scenario provided in section 16.4.

16.1.2 Hazards Under Consideration

Hazards considered in the quantitative assessment are as follows:

- Increased vessel to vessel collision risk;
- Increased powered vessel to structure allision risk;
- Increased drifting vessel to structure allision risk; and
- Increased fishing vessel to structure allision risk.

The pre wind farm assessment has been informed by the vessel traffic survey data (see section 10 and other baseline data sources (such as Anatec’s ShipRoutes database). Conservative assumptions have been made with regard to route deviations and future shipping growth over the lifetime of the Proposed Development.

16.1.3 Post Wind Farm Routeing

The methodology for the post wind farm routeing is outlined in section 15.5.1.

16.2 Pre Wind Farm Modelling

16.2.1 Vessel to Vessel Encounters

An assessment of current vessel to vessel encounters has been undertaken by replaying at high speed the vessel traffic data collected as part of the vessel traffic surveys (see section

5.2). The model defines an encounter as two vessels passing within 1 nm of each other within the same minute. This helps to illustrate where existing shipping congestion is highest and therefore where offshore developments, such as an offshore wind farm, could potentially increase congestion and therefore also increase the risk of encounters and collisions. No account of whether encounters are head on or stern to head are given; only close proximity is accounted for.

Figure 16.1 presents a heat map based upon the geographical distribution of vessel encounter tracks within a density grid. Following this, Figure 16.2 illustrates the daily number of encounters recorded within both the Proposed Development array area study area and the Proposed Development array area throughout the survey periods.

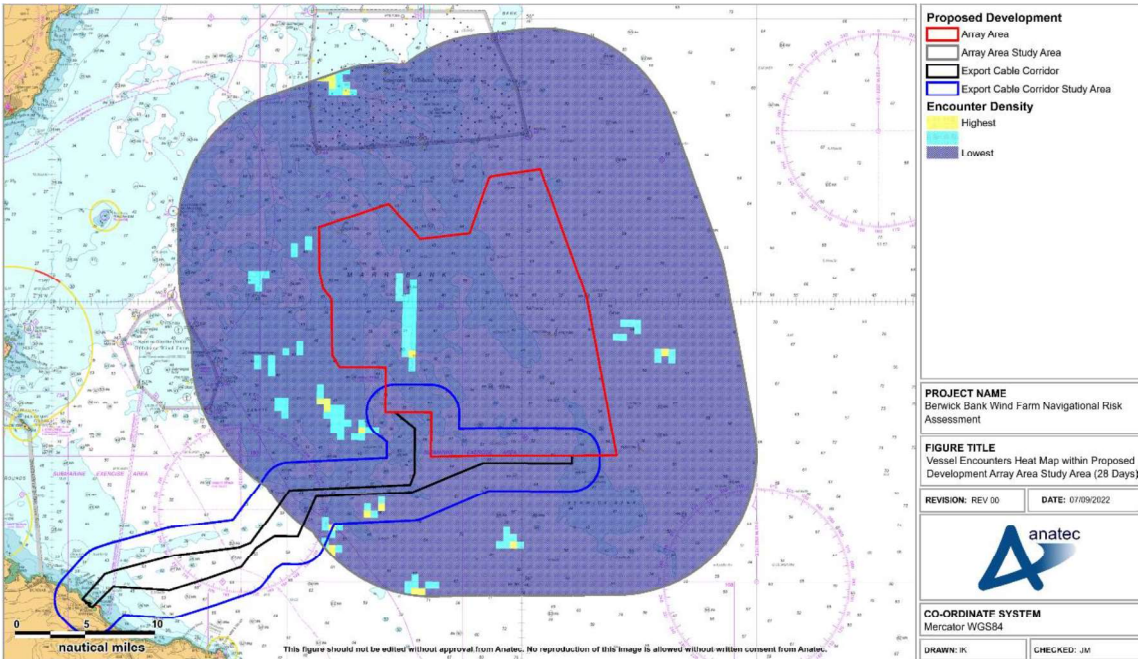


Figure 16.1 Vessel Encounters Heat Map within the Proposed Development Array Area Study Area (28 Days, August 2022 and January 2021)

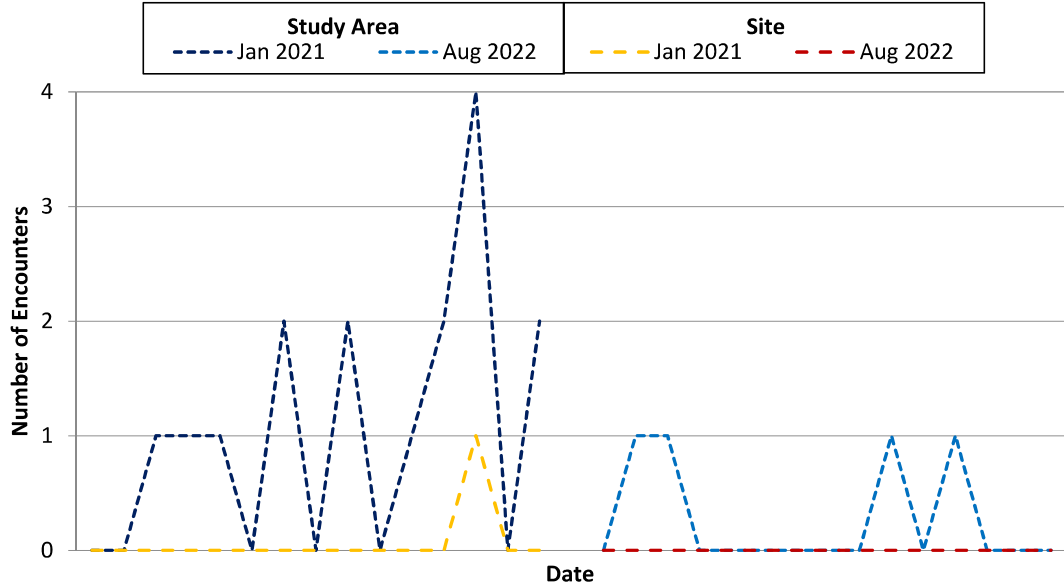


Figure 16.2 Vessel Encounters per Day within the Proposed Development Array Area Study Area (28 Days, July 2020 & January 2021)

There was on average one encounter per day within the Proposed Development array area study area throughout the survey periods. The greatest number of encounters recorded in one day was four, on 23 January 2021, due to a number of cargo vessels and tankers transiting in the NW corner of the Proposed Development array area study area.

The most frequent vessel types involved in encounters within the Proposed Development array area study area were cargo vessels (31%) followed by tankers (28%) and commercial fishing vessels (19%).

16.2.2 Vessel to Vessel Collision Risk

Using the pre wind farm vessel routing as input, Anatec's COLLRISK model has been run to estimate the existing vessel to vessel collision risk within the Proposed Development array area study area. The route positions and widths are based on the vessel traffic survey data and have been validated using the long-term vessel traffic data and consultation with local stakeholders.

A heat map based upon the geographical distribution of collision risk within a density grid for the pre wind farm base case is presented in Figure 16.3.

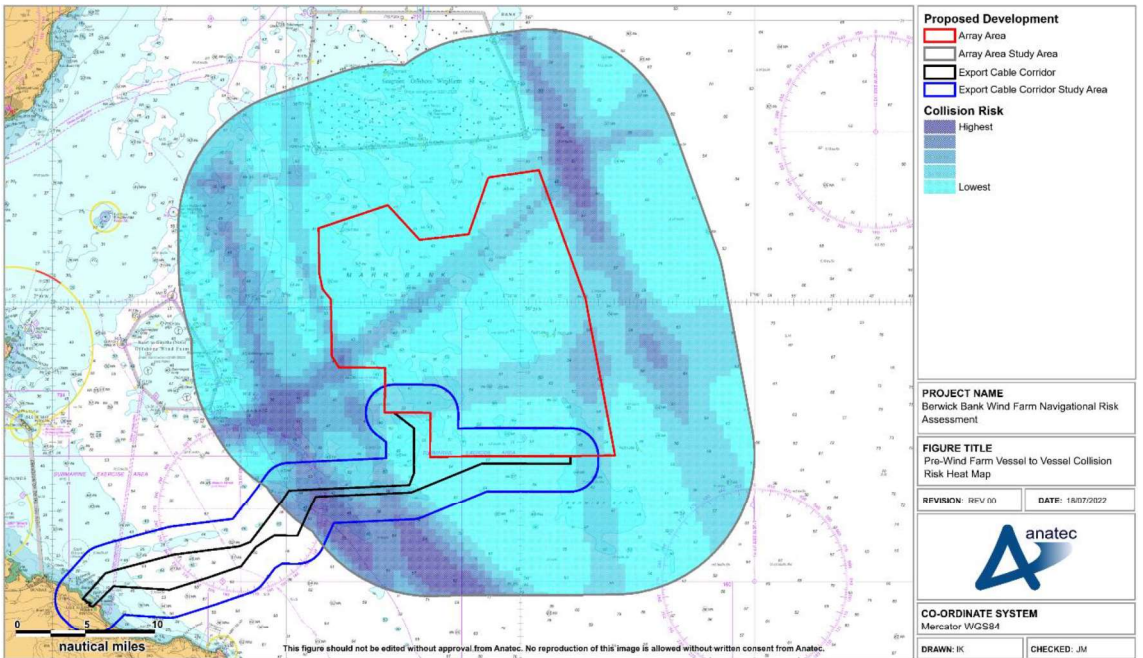


Figure 16.3 Pre Wind Farm Vessel to Vessel Collision Risk Heat Map within the Proposed Development Array Area Study Area

Assuming base case vessel traffic levels, the annual collision frequency pre wind farm was estimated to be 8.49×10^{-4} , corresponding to a return period of approximately one in 1,178 years. This is slightly above the average for UK offshore wind farm developments and is reflective of the relatively large area covered. It is noted that the model is calibrated based upon major incident data at sea which allows for benchmarking but does not cover all incidents, such as minor effects. Other incident data, which includes minor incidents, is presented in section 9.

16.3 Post Wind Farm Modelling

16.3.1 Simulated Automatic Identification System

Anatec's AIS Simulator software was used to gain an insight into the potential re-routed commercial traffic following the installation of the wind farm structures within the Proposed Development array area. The AIS Simulator uses the mean positions of the main commercial routes identified within the Proposed Development array area study area and the anticipated shift post wind farm, together with the standard deviations and average number of vessels on each main commercial route to simulate tracks.

A plot of 28 days of simulated AIS (matching the total duration of the vessel traffic surveys) within the Proposed Development array area study area, based on the deviated main commercial routes, is presented in Figure 16.4.

It is noted that the simulated AIS represents a maximum design scenario based on routes passing at a minimum mean distance of 1 nm from the Proposed Development array area.

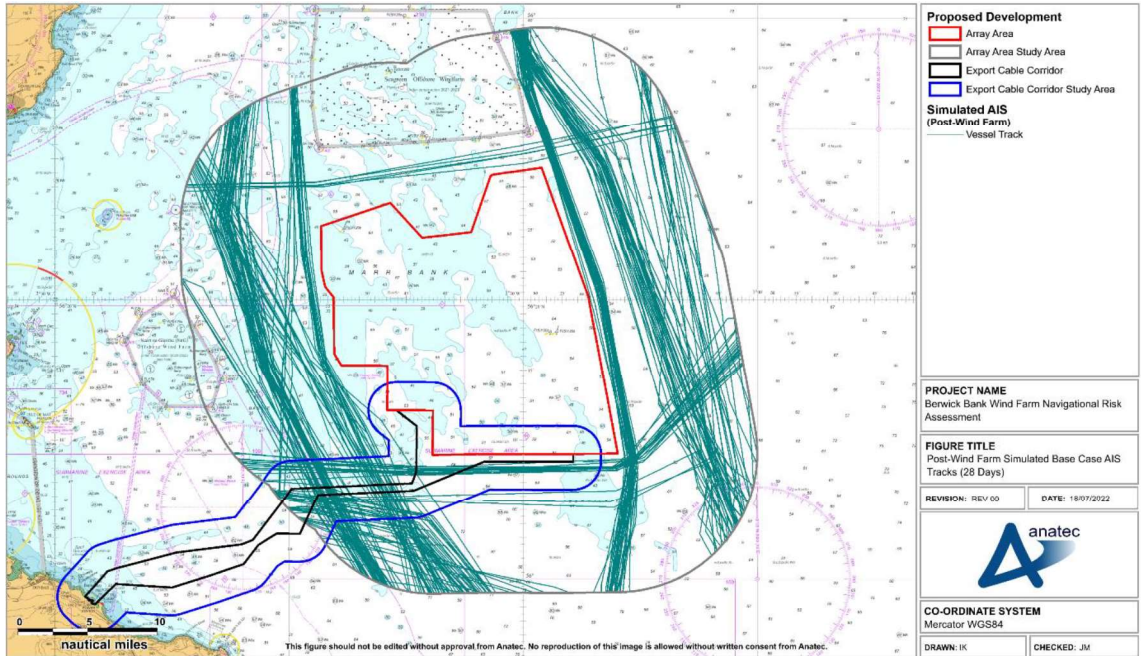


Figure 16.4 Post Wind Farm Simulated Base Case AIS Tracks within the Proposed Development Array Area Study Area (28 Days)

16.3.2 Vessel to Vessel Collision Risk

Using the post wind farm routing as input, Anatec's COLLRISK model has been run to estimate the anticipated vessel to vessel collision risk within the Proposed Development array area study area.

A heat map based on the geographical distribution of collision risk within a density grid for post wind farm base case is presented in Figure 16.5.

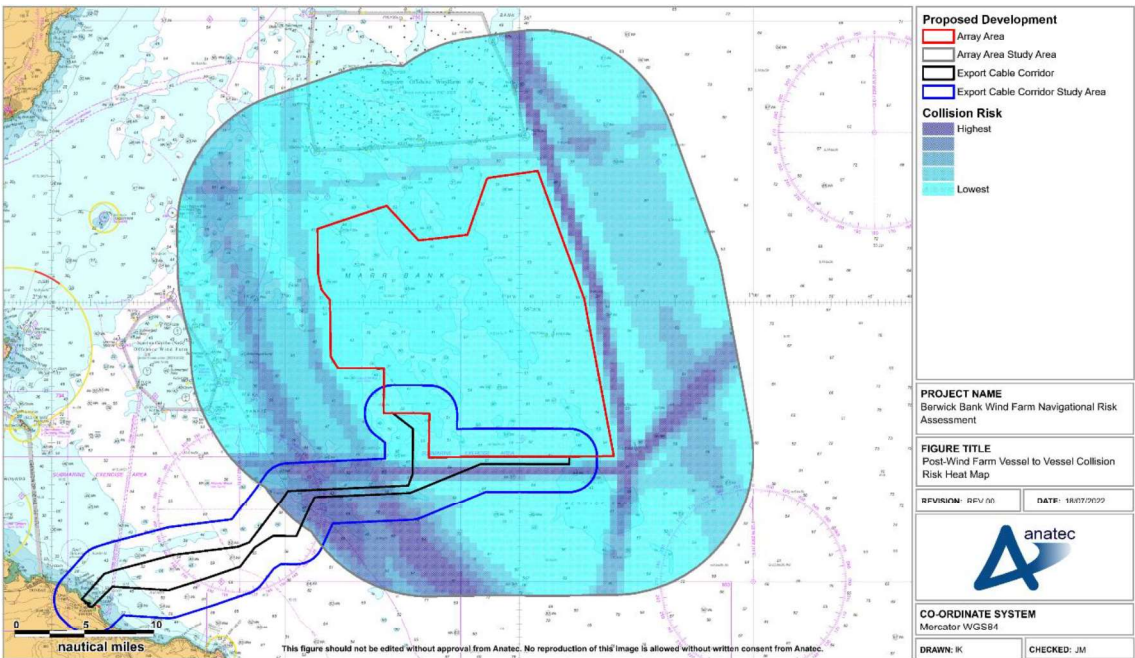


Figure 16.5 Post Wind Farm Vessel to Vessel Collision Risk Heat Map within the Proposed Development Array Area Study Area

Assuming base case traffic levels, the annual collision frequency post wind farm was estimated to be 9.69×10^{-4} , corresponding to a return period of approximately one in 1,032 years. This represents a 15% increase in collision frequency compared to the pre wind farm base case result.

The increase in vessel to vessel collision risk was greatest along the southern and eastern edges of the Proposed Development array area. The change in vessel to vessel collision risk between the base case pre wind farm and post wind farm scenarios is presented in a heat map in Figure 16.6.

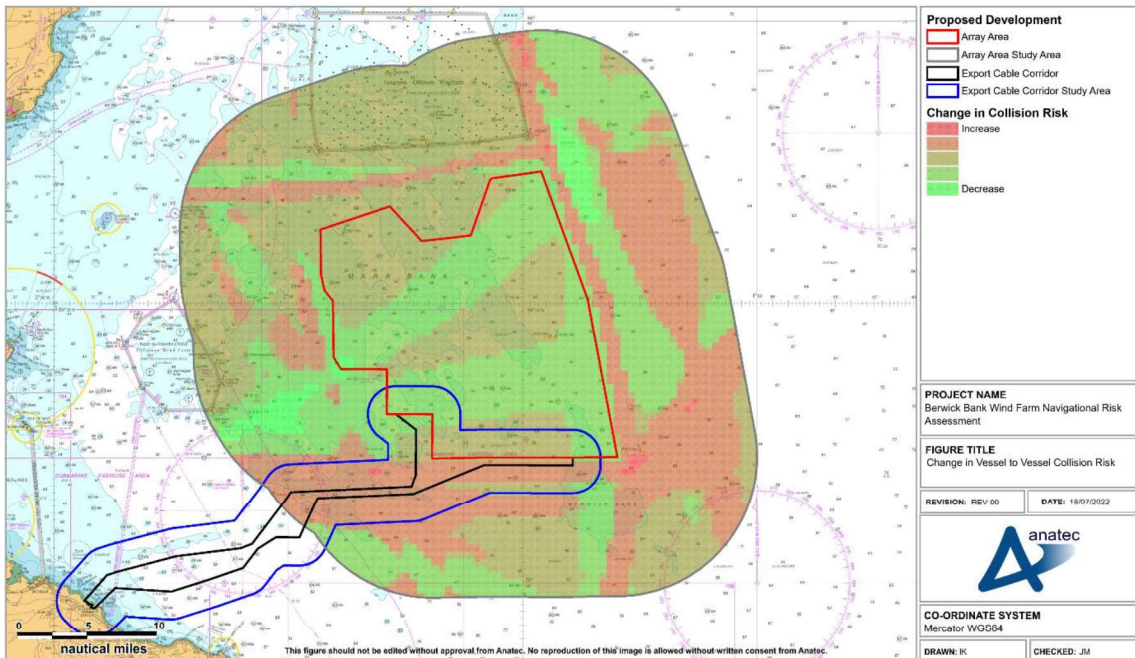


Figure 16.6 Change in Vessel to Vessel Collision Risk within the Proposed Development Array Area Study Area

16.3.3 Powered Vessel to Structure Allision Risk

Based upon the vessel routeing identified within the Proposed Development array area study area, the anticipated re-routeing as a result of the presence of the Proposed Development, and the assumptions that relevant embedded mitigation measures are in place (see section 17), the frequency of an errant vessel under power deviating from its route to the extent that it may come into proximity with a wind farm structure associated with the Proposed Development is considered to be low.

From consultation with the shipping industry, it is also assumed that commercial vessels would be highly unlikely to navigate between wind farm structures due to the restricted sea room and will instead be directed by the aids to navigation located in the region and those present at the Proposed Development. During the construction and decommissioning phases this will primarily consist of the buoyed construction area, while during the operation and maintenance phase this will primarily consist of the lighting and marking of the wind farm structures themselves.

Using the post wind farm routeing as input, together with the maximum design scenario and local meteorological ocean data, Anatec's COLLRISK model was run to estimate the likelihood of a commercial vessel alluding with one of the wind farm structures within the Proposed Development array area whilst under power. In order to maintain a maximum design scenario, the model did not consider one structure shielding another.

A plot of the annual powered allision frequency per structure for the base case is presented in Figure 16.7, with the chart background removed to increase the visibility of those structures with lower allision frequencies.

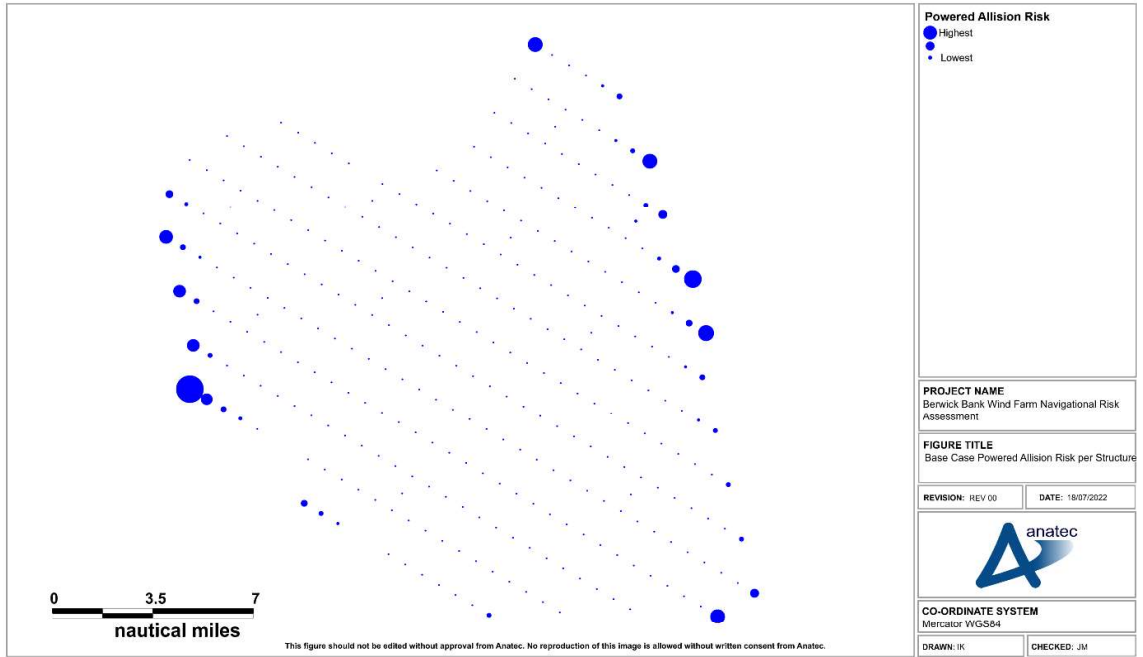


Figure 16.7 Base Case Powered Allision Risk per Structure

Assuming base case vessel traffic levels, the annual powered allision frequency was estimated to be 1.52×10^{-4} , corresponding to a collision return period of approximately one in 6,581 years.

The greatest powered vessel to structure allision risk was associated with structures along the western edge of the Proposed Development array area, where multiple main commercial routes pass at the minimum 1 nm distance. The greatest individual allision risk was associated with one of the structures on the western edge of the Proposed Development array area (approximately 2.72×10^{-5} , or one in 36,701 years).

16.3.4 Drifting Vessel to Structure Allision Risk

Using the post wind farm routing as input, together with the worst-case indicative array layout and meteorological ocean data, Anatec's COLLRISK model was run to estimate the likelihood of a commercial vessel alluding with one of the wind farm structures within the Proposed Development array area. The model is based on the premise that propulsion on a vessel must fail before drifting will occur. The model takes account of the type and size of the vessel, the number of engines and the average time required to repair but does not consider navigational errors caused by human actions.

The exposure times for a drifting scenario are based upon the vessel hours spent within the Proposed Development array area study area. These have been estimated based on the vessel

traffic levels, speeds, and revised routeing patterns. The exposure is divided by vessel type and size to ensure that these specific factors, which based upon analysis of historical incident data have been shown to influence incident rates, are taken into account for the modelling.

Using this information, the overall rate of mechanical failure in proximity to the Proposed Development array area was estimated. The probability of a vessel drifting towards a wind farm structure and drift speed are dependent on the prevailing wind, wave and tidal conditions at the time of the incident. Therefore, three drift scenarios were modelled, each using the meteorological ocean data provided in section 8.

- Wind;
- Peak spring flood tide; and
- Peak spring ebb tide.

The probability of vessel recovery from drift is estimated based upon the speed of the drift and hence the time available before arriving at a wind farm structure. Vessels which do not recover within this time are assumed to allide. Conservatively, no account is made for another vessel (including a vessel associated with the Proposed Development) rendering assistance.

After modelling the three drifting scenarios, the wind dominated scenario was established to produce the worst-case results. A plot of the annual drifting allision frequency per structure for the base case is presented in Figure 16.8, with the chart background removed to increase the visibility of those structures with a low allision frequency.

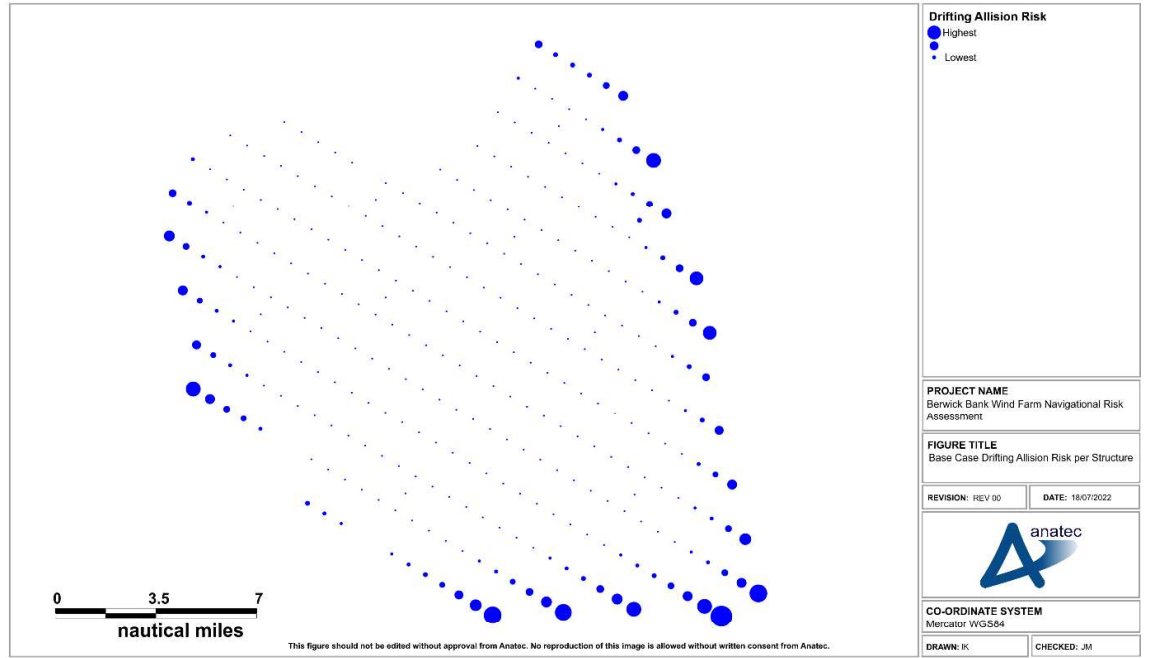


Figure 16.8 Base Case Drifting Allision Risk per Structure

Assuming base case vessel traffic levels, the annual drifting allision frequency was estimated to be 7.69×10^{-5} , corresponding to a return period of approximately one in 12,999 years.

The greatest drifting vessel to structure allision risk was associated with structures along the southern and eastern edges of the Proposed Development array area, at both of which main commercial routes pass at the minimum mean distance of 1 nm from the Proposed Development array area. The greatest individual allision risk was associated with one of the structures on the southern edge of the Proposed Development array area (approximately 4.82×10^{-6} , or one in 207,650 years).

It is noted that historically there have been no reported drifting allision incidents with wind farm structures in the UK. While drifting vessels do occur every year in UK waters, in most cases the vessel has been recovered prior to any allision incident occurring (such as by anchoring, restarting engines, or being taken in tow).

16.3.5 Fishing Vessel to Structure Allision Risk

Using the vessel traffic survey data as input, Anatec’s COLLRISK model was run to estimate the likelihood of a fishing vessel alluding with one of the wind farm structures within the Proposed Development array area.

A fishing vessel allision is classified separately from other allisions since fishing vessels may be either in transit or actively fishing within the Proposed Development array area (unlike the transiting commercial traffic characterised by the main commercial routes). Additionally, fishing vessels could be observed internally within the Proposed Development array area (i.e., between structures) as well as externally. Anatec’s model uses vessel numbers, sizes (length and beam), array layout and structure dimensions. The likelihood of a major allision incident has been calibrated against historical maritime incident data and historical AIS vessel traffic data within operational wind farm arrays. Given that not all fishing vessels broadcast on AIS, the vessel density observed is scaled up to account for non-AIS fishing vessels, with the scaling factor dependent on the distance of the array offshore.

A plot of the annual fishing vessel allision frequency per structure for the base case is presented in Figure 16.9.

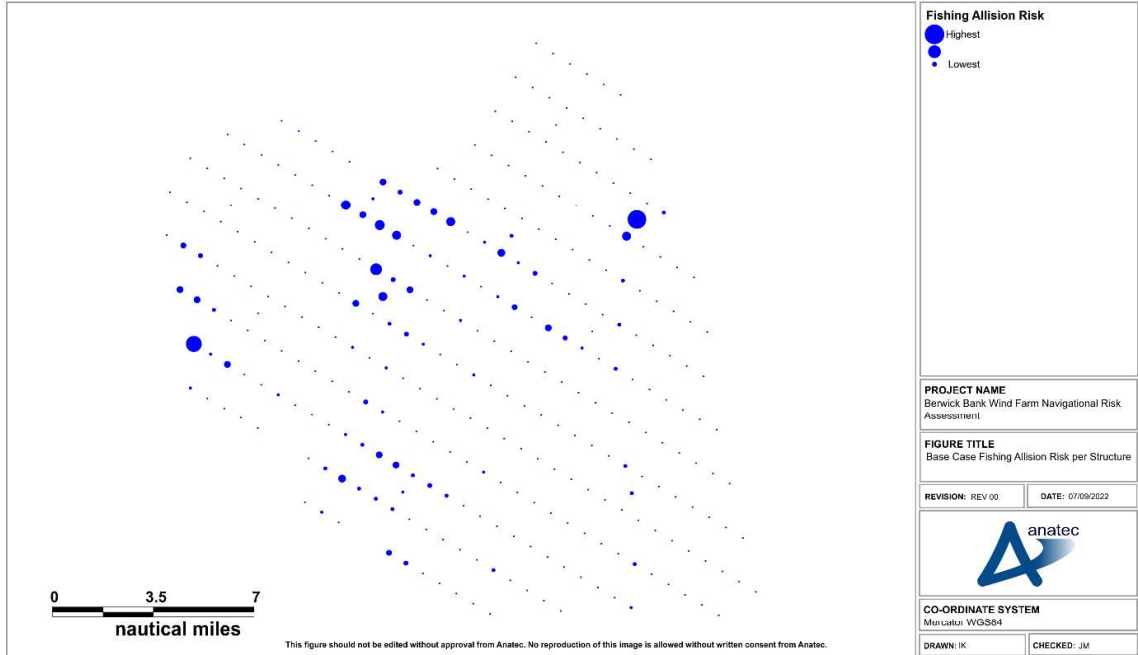


Figure 16.9 Base Case Fishing Vessel Allision Risk per Structure

Assuming base case traffic levels, the annual fishing vessel to structure allision frequency was estimated to be 2.29×10^{-1} , corresponding to a return period of approximately one in 4.4 years.

The fishing vessel to structure allision risk was distributed throughout the Proposed Development array area, with fishing activity observed throughout. The greatest individual allision risk was associated with a structure (an offshore substation platform) in the north-east of the Proposed Development array area (approximately 2.19×10^{-2} or one in 45.6 years).

It is noted that this allision risk result does not give an indication of the consequences of an allision incident which would most likely (based on historical incident data) involve a minor contact with no material damage, injuries to persons or pollution.

16.4 Risk Results Summary

The previous sections modelled two scenarios, namely the pre and post wind farm scenarios with base case traffic levels. In order to incorporate the potential for future traffic growth, pre and post wind farm scenarios have also been modelled for future case traffic levels (both 10% and 20% increases). Table 16.1 summarises the results of all six scenarios.

Overall, the base case collision and allision frequency due to the presence of the Proposed Development was estimated to increase by approximately 1.95×10^{-1} (equating to an additional collision or allision every 5.1 years).

Table 16.1 Summary of Annual Collision and Allision Risk Results

Risk	Scenario	Annual Frequency (Return Period)		
		Pre Wind Farm	Post Wind Farm	Change
Vessel to vessel collision	Base case	8.49×10^{-4} (1 in 1,178 years)	9.69×10^{-4} (1 in 1,031 years)	1.20×10^{-4} (1 in 8,310 years)
	Future case (10%)	1.06×10^{-3} (1 in 946 years)	1.21×10^{-3} (1 in 828 years)	1.50×10^{-4} (1 in 6,665 years)
	Future case (20%)	1.26×10^{-3} (1 in 791 years)	1.44×10^{-3} (1 in 694 years)	1.75×10^{-4} (1 in 5,724 years)
Powered vessel to structure allision	Base case	N/A	1.52×10^{-4} (1 in 6,581 years)	1.52×10^{-4} (1 in 6,581 years)
	Future case (10%)	N/A	1.69×10^{-4} (1 in 5,900 years)	1.69×10^{-4} (1 in 5,900 years)
	Future case (20%)	N/A	1.85×10^{-4} (1 in 5,407 years)	1.85×10^{-4} (1 in 5,407 years)
Drifting vessel to structure allision	Base case	N/A	7.69×10^{-5} (1 in 12,999 years)	7.69×10^{-5} (1 in 12,999 years)
	Future case (10%)	N/A	8.58×10^{-5} (1 in 11,649 years)	8.58×10^{-5} (1 in 11,649 years)
	Future case (20%)	N/A	9.36×10^{-5} (1 in 10,689 years)	9.36×10^{-5} (1 in 10,689 years)
Fishing vessel to structure allision	Base case	N/A	2.29×10^{-1} (1 in 4.4 years)	2.29×10^{-1} (1 in 4.4 years)
	Future case (10%)	N/A	2.52×10^{-1} (1 in 4.0 years)	2.52×10^{-1} (1 in 4.0 years)
	Future case (20%)	N/A	2.75×10^{-1} (1 in 3.6 years)	2.75×10^{-1} (1 in 3.6 years)
Total	Base case	8.49×10^{-4} (1 in 1,178 years)	2.30×10^{-1} (1 in 4.3 years)	2.29×10^{-1} (1 in 4.4 years)
	Future case (10%)	1.06×10^{-3} (1 in 946 years)	2.53×10^{-1} (1 in 3.9 years)	2.52×10^{-1} (1 in 4.0 years)
	Future case (20%)	1.26×10^{-3} (1 in 791 years)	2.77×10^{-1} (1 in 3.6 years)	2.76×10^{-1} (1 in 3.6 years)

17 Embedded Mitigation Measures

As part of the design process for the Proposed Development, a number of embedded mitigation measures have been adopted to reduce the risk of hazards identified, including those relevant to shipping and navigation. These measures have and will continue to evolve over the development process as the EIA progresses and in response to consultation.

These measures typically include those that have been identified as good or standard practice and include actions that will be undertaken to meet existing legislation requirements. As there is a commitment to implementing these measures, and also to various standard sectoral practices and procedures, they are considered inherently part of the design of the Proposed Development.

The embedded mitigation measures within the design relevant to shipping and navigation are outlined in Table 17.1

Table 17.1 Embedded Mitigation Measures Relevant to Shipping and Navigation

Embedded Mitigation Measure	Details
Application for Safety Zones	Application for Safety Zones up to 500 m around structures where vessels are undertaking construction work during construction and periods of major maintenance and 50 m around partially completed or completed but not yet fully commissioned surface piercing structures during construction.
Buoyed construction area	Deployment of a buoyed construction area in agreement with NLB.
Cable burial risk assessment	Suitable implementation and monitoring of cable protection (via burial, or external protection where adequate burial depth as identified via risk assessment is not feasible) with any damage, destruction or decay of cables notified to MCA, NLB, Kingfisher and UKHO no later than 24 hours after discovered.
Compliance with MGN 654	Compliance with MGN 654 and its annexes (in particular SAR annex 5 (MCA, 2021) and completion of a SAR checklist) where applicable.
Guard vessel(s)	Use of guard vessel(s) as required by risk assessment.
Design Specification and Layout Plan	Layout agreed through the DSLP via consultation with the MCA and NLB.
Lighting and marking	Lighting and marking of the Proposed Development array area in agreement with NLB, and in line with IALA Guidance O-139 (IALA, 2021 (a)) and G1162 (IALA, 2021 (b)).
Marine coordination	Marine coordination and communication to manage project vessel movements.
Marine Pollution Contingency Plan	Creation and implementation of a Marine Pollution Contingency Plan.
Marking on charts	Appropriate marking of structures (both within the Proposed Development array area and export cable corridor) on UKHO Admiralty Charts.

Embedded Mitigation Measure	Details
Minimum blade clearance	Minimum blade clearance of 22 m above Mean High Water Springs (MHWS) (In line with RYA policy (RYA, 2019) ¹⁰ .
Project vessel compliance with international marine regulations	Compliance of all project vessels with international marine regulations as adopted by the Flag State, notably the COLREGs (IMO, 1972/77) and SOLAS (IMO, 1974).
Promulgation of information	Promulgation of information for vessel routes, timings and locations, Safety Zones and advisory passing distances as required via Kingfisher Bulletins.

17.1 Marine Aids to Navigation

Throughout all phases, aids to navigation will be provided in accordance with NLB and MCA requirements, with consideration being given to *IALA Guidance O-139* (IALA, 2021 (a)), *IALA Guidance G1162* (IALA, 2021 (b)), and MGN 654 (MCA, 2021).

17.1.1 Construction and Decommissioning Phases

During the construction and decommissioning phases, buoyed construction and decommissioning areas will be established and marked, where required, in accordance with NLB requirements based on the IALA Maritime Buoyage System.

17.1.2 Operation and Maintenance Phase

Marking during the operation and maintenance phase will be agreed in consultation with NLB once the final array layout has been selected post consent; however, the following subsections summarise likely requirements.

17.1.2.1 Marking of Individual Array Structures

In line with *IALA Guidance G1162*, each surface structure within the Proposed Development array area will be painted yellow up to point agreed with NLB, with the remaining structure above this point being light grey. Each structure will also be clearly marked with a unique alphanumeric identifier which will be clearly visible from all directions. The MCA will advise post-consent on the specific requirements for the identifiers, but a logical pattern with potential for additional visual marks may be considered by statutory stakeholders. Each identifier will be illuminated by a low-intensity light such that the sign is available from a vessel thus enabling the structure to be identified at a suitable distance to avoid an allision incident.

The identifiers will be situated such that under normal conditions of visibility and all known tidal conditions, they are clearly readable by an observer (with the naked eye), stationed 3 m above sea level and at a distance of at least 150 m from the wind turbine. The light will be

¹⁰ The minimum blade clearance will be 37 m above LAT as outlined as part of the maximum design scenario in Section 6.2.2.

either hooded or baffled so as to avoid unnecessary light pollution or confusion with navigational marks.

17.1.2.2 Marking of Array as a Whole

The marking of the array as a whole will be agreed with NLB once the final array layout has been selected and will be in line with *IALA Guidance G1162*. As per the IALA guidance, and in consultation with NLB, it will be ensured that:

- All corner structures are marked as a Significant Peripheral Structure (SPS) and where necessary, to satisfy the spacing requirements between SPSs, additional periphery structures may also be marked as SPSs¹¹.
- Structures designated as an SPS will exhibit a flashing yellow five second (flash yellow every five seconds) light of at least 5 nm nominal range and omnidirectional fog signals as appropriate and where prescribed by NLB, and will be sounded at least when the visibility is 2 nm or less.
- All lights will be visible to shipping through 360° and if more than one lantern is required on a structure to meet the all-round visibility requirement, then all the lanterns on that structure will be synchronised.
- All lights will be exhibited at the same height at least 6 m above HAT and below the arc of the lowest wind turbine blades.
- Remote monitoring sensors using Supervisory Control and Data Acquisition (SCADA) will be included as part of the lighting and marking scope to ensure a high level of availability for all aids to navigation.
- Aviation lighting will be as per Civil Aviation Authority (CAA) requirements; however, will likely be synchronised Morse “W” at the request of NLB.
- All lighting will be considered cumulatively with existing aids to navigation to avoid the potential for light confusion to passing traffic.

Consideration will also be given to the use of marking via AIS, or other electronic means (such as radar beacons (racon)) to assist safe navigation particularly in reduced visibility. AIS transmitters or virtual buoys could also be considered internally to assist with safe navigation within the array. Any such marking will be agreed in consultation with NLB, noting that NLB confirmed during consultation for the NRA that further discussions will be appropriate once layouts are under consideration.

17.1.2.3 Marking of Offshore Export Cables

No lighting or physical marking will be required during the operation and maintenance phase for the offshore export cables.

¹¹ NLB are currently minimising use of Intermediate Peripheral Structures (IPS) which have typically been used for nearshore developments in the past.

17.2 Design Specifications Noted in Marine Guidance Note 654

The individual wind turbines and other structures will have functions and procedures in place for generator shut down in emergency situations, as per MGN 654 (MCA, 2021).

18 Project in Isolation Risk Assessment

This section outlines the final shipping and navigation hazards for the Project in isolation which have been identified based upon:

- Baseline data;
- Consultation;
- Hazard log¹²; and
- Modelling/numerical assessment.

For each hazard, a description of the hazard is given alongside the causes, relevant users. As per section 0, hazards associated with navigation, communications, and position fixing equipment (with the exception of interference with magnetic position fixing equipment) have been screened out of the FSA. Hazards associated with vessels engaged in fishing are considered in **volume 2, chapter 12**.

To avoid replication of text the risk assessment has been undertaken in **volume 2, chapter 13** in line with EIA requirements but does follow the FSA methodology. Table 18.1 summarises the output of the risk assessment undertaken with consideration of the embedded mitigation measures outlined in section 17. Any additional mitigation measures required above those outlined in section 17 are also summarised.

¹² The hazard log is the outputs of the Hazard Workshop and feeds into the final assessment of risk contained within Table 18.1.

Table 18.1 Summary of Outputs of Risk Assessment

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Construction Phase								
Vessels may be displaced from their existing routes due to construction activities associated with the Proposed Development.	Presence of construction activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels. 	24	Minor	Frequent	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of project vessels during construction may increase the likelihood of vessel to vessel encounters and subsequently increase the collision risk between third-party and project vessels.	Presence of construction activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; Recreational vessels; and Project vessels. 	27	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision risk between third-party vessels.	Presence of construction activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	29	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable
Partially complete and completed structures within the Proposed Development array area could create an allision risk (powered or drifting) to passing traffic.	Presence of surface infrastructure associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	30	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Access to local ports may be impacted due to construction activities associated with the Proposed Development.	Presence of construction activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	33	Minor	Frequent	Tolerable	None	Tolerable
Operation and Maintenance Phase								
Vessels may be displaced from their existing routes due to the presence of the Proposed Development.	Presence of surface infrastructure associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels. 	26	Minor	Frequent	Tolerable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of project vessels during operation may increase the likelihood of vessel to vessel encounters and subsequently increase the collision risk between third-party and project vessels.	Presence of operation/maintenance activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	27	Moderate	Negligible	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision areas and a subsequent increase in encounters.	Presence of surface infrastructure associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial Fishing vessels; and Recreational vessels. 	29	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable
Structures within the Proposed Development array area could create an allision risk (powered or drifting) to passing vessels.	Presence of surface infrastructure associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial Vessels; Commercial fishing vessels; and Recreational vessels. 	31	Moderate	Remote	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Access to local ports may be impacted due to maintenance activities associated with the Proposed Development.	Presence of operation/maintenance activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial Vessels; Commercial fishing vessels; and Recreational vessels. 	34	Minor	Reasonably Probable	Tolerable	None	Tolerable
The implementation of cable protection to cables associated with the Proposed Development may reduce water depths in proximity and therefore reduced the under keel clearance for third-party traffic.	Presence of subsea cable protection associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	35	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of subsea cables associated with the Proposed Development may increase the likelihood of interaction for third-party vessels including a snagging risk for anchors and fishing gear.	Presence of subsea cable protection associated with the Proposed Development.	<ul style="list-style-type: none"> Anchored vessels. 	36	Minor	Negligible	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of the Proposed Development will increase the number of vessels in the area which may result in an increased number of incidents requiring emergency response and may reduce access for SAR responders.	Presence of surface infrastructure associated with the Proposed Development.	<ul style="list-style-type: none"> Emergency responders. 	36	Moderate	Remote	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of infrastructure associated with the Proposed Development may increase the likelihood of interference with magnetic position fixing equipment for third-party vessels.	Presence of infrastructure (surface and subsea) associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	37	Minor	Negligible	Broadly Acceptable	None	Broadly Acceptable
Decommissioning Phase								
Vessels may be displaced from their existing routes due to decommissioning activities associated with the Proposed Development.	Presence of decommissioning activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	26	Minor	Frequent	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of project vessels during decommissioning may increase the likelihood of vessel to vessel encounters and subsequently increase the collision risk between third-party and project vessels.	Presence of decommissioning activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; Recreational vessels; and Project vessels 	28	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision areas and a subsequent increase in encounters.	Presence of decommissioning activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	30	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable
Partially decommissioned structures within the Proposed Development array area could create an allision risk (powered or drifting) to passing traffic.	Presence of surface infrastructure associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	33	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable

Project A4495
Client Berwick Bank Project
Title Berwick Bank Wind Farm Navigational Risk Assessment

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Access to local ports may be impacted due to decommissioning activities associated with the Proposed Development.	Presence of decommissioning activities associated with the Proposed Development.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	35	Minor	Frequent	Tolerable	None	Tolerable

19 Cumulative Risk Assessment

19.1 Navigation Corridor Safety Case

This section considers the gap between the Proposed Development array area and Inch Cape as a navigation corridor and, where appropriate, uses available guidance to provide a safety case for the corridor from a navigational perspective.

Figure 19.1 presents an overview of the gap between the Proposed Development array area and Inch Cape. For the purposes of this subsection, Inch Cape is represented by the array area boundary published by Crown Estate Scotland, noting that a final array layout has not been published at the time of writing. Therefore, as a worst case, it is assumed that build out of Inch Cape could maximise use of the full array area.

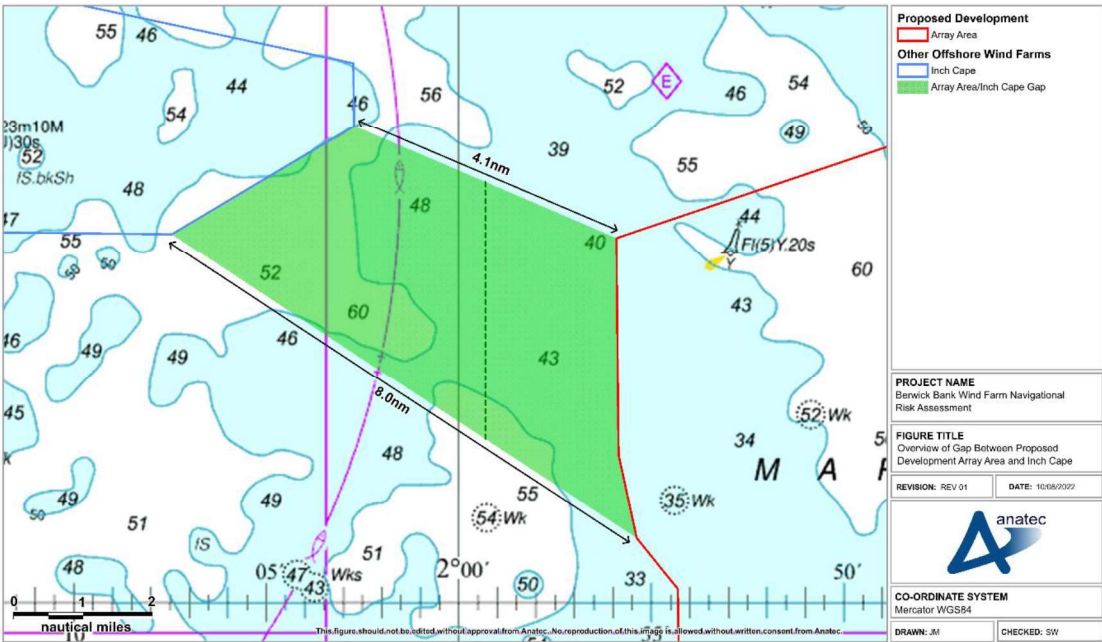


Figure 19.1 Overview of Gap Between Proposed Development Array Area and Inch Cape

The length of the gap is dependent upon where it is measured from, with the length increasing towards the eastern extent. At this extreme of the gap, the length is approximately 4.2 nm. Towards the western extent the length of the gap is approximately 3.3 nm (measured north-south from the eastern boundary of Inch Cape) and in a central location is approximately 3.7 nm.

The width of the gap is approximately 4.1 nm at the northern extent and approximately 8.0 nm at the southern extent, with the former representing the minimum overall width.

19.1.1 Navigational Features

The charted water depth within the gap between the Proposed Development array area and Inch Cape varies between 40 and 60 m below CD. There are no existing surface or seabed features within or in proximity to the gap such as aids to navigation, charted wrecks or submarine cables and pipelines.

19.1.2 Potential Users

From the vessel traffic baseline, five of the main commercial routes identified in section 11.2 (Routes 1, 9, 10, 13 and 14) could be candidates for potential use of a navigation corridor. This is a worst case assumption in terms of usage and in reality, it is anticipated that vessels would be more likely to make an alternative choice such as passing inshore (with appropriate draughts/cargoes) of Inch Cape or offshore of the Proposed Development array area as noted in the regular operator response from Evergas (see section 4.2). This is considered further in section 15.6.

Overall, there is an average of three to four transits per day by potential navigation corridor users on the main commercial routes. Applying a conservative 20% increase in commercial vessel movements for the future case scenario (as outlined in section 15.1), an average of four to five transits per day by potential navigation corridor users is considered throughout the rest of this section.

The average length of potential navigation corridor users was 87 m with a 90th percentile length of 131 m. The 90th percentile length is considered throughout the rest of this section.

19.1.3 Application of Marine Guidance Note 654

There are multiple methods within MGN 654 that the MCA may require developers to demonstrate when calculating the safe width of a proposed navigation corridor. Those methods are demonstrated in the following paragraphs.

MGN 654 states that:

The possibility of ships overtaking cannot be excluded and should be taken into consideration. Consequently, the assumption should be that four ships should safely be able to pass each other... Between overtaking and meeting vessels, a distance of two ship's lengths is normally maintained as a minimum passing distance.

Therefore, the overtaking width for the navigation corridor, based on the 90th percentile length, is 0.42 nm (786 m)¹³.

To determine the overall corridor width, the suitable distance between the outermost vessels and the array areas is required. The Shipping Route Template indicates that 1 nm is the

¹³ Four vessels side by side equates to three gaps between vessels, so two times 131 m three times totalling 786 m.

“minimum distance to a parallel IMO routeing measure” and is widely accepted in the industry as a minimum passing distance from an offshore wind farm.

Therefore, the minimum overall width for the navigation corridor, based on the 90th percentile length is 2.4 nm.

Additionally, MGN 654 states that:

Experience also shows that in heavy sea conditions it is much harder to turn the vessel around and [it] may not be possible to achieve a dead stop and deviations from track are common. Therefore 20° or more, are common and must be considered in developing corridors through OREIs.

Applying this 20-degree rule to the minimum navigation corridor length of 3.3 nm (the shortest north-south length) gives a corresponding width requirement of 1.2 nm.

19.1.4 Application of Permanent International Association of Navigation Congresses Guidance

The *Guidance on the Interaction between Offshore Wind Farms and Maritime Navigation* (Permanent International Association of Navigation Congresses (PIANC), 2018) provides a methodology for calculating the width of corridor required to make a round turn to starboard in the event of a head-on encounter between two vessels. Although this methodology is designed for a Traffic Separation Scheme running parallel to an offshore wind farm, it is considered relevant and useful for corridor design, noting that vessels will have greater flexibility to alter course in the event that collision avoidance is required than would be the case within an IMO routeing measure.

As illustrated in Figure 19.2, the calculation assumes an initial deviation of 0.3 nm, turning circle of six vessel lengths diameter and 500 m safety margin.

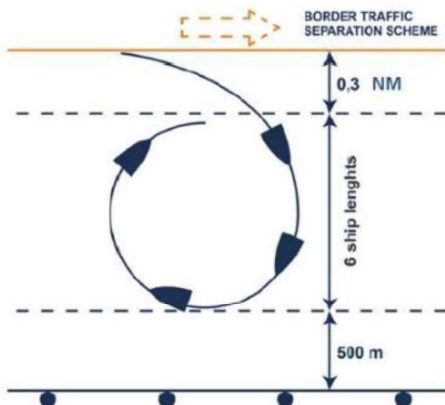


Figure 19.2 Sea Space Required for a Full Round Turn to Starboard (PIANC, 2018)

Applying the calculation to the navigation corridor gives a total width requirement of 2.0 nm, with the breakdown of the distances considered illustrated in Figure 19.3.

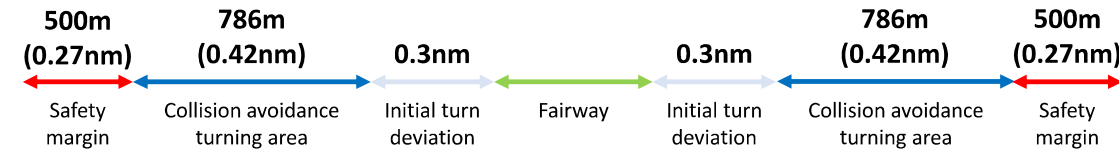


Figure 19.3 Application of PIANC Guidance to Navigation Corridor Between Proposed Development Array Area and Inch Cape

19.1.5 Application of Maritime Institute Netherlands Guidance

A study undertaken by the Maritime Institute Netherlands (MARIN) and referenced in both the PIANC guidance and *The Shipping Industry and Marine Spatial Planning (MSP) – A Professional Approach* (Nautical Institute, 2013) states that the width of a navigation corridor should consider:

1. Number of vessels: based on AIS study, keeping in mind the future development during the lifespan of the structures;
2. Maximum size of vessels: same as point 1 re: future development;
3. Number of vessels overtaking:
 - a. <4,400 vessels per year: 2 vessels side to side.
 - b. >4,400 vessels and <18,000 vessels: 3 side to side.
 - c. >18,000 vessels: 4 vessels side to side.
4. Room per vessel: 2 ship lengths.

The following example is provided, noting that a separation of one vessel length between the flank vessels and the array is assumed:

For example: a traffic lane that accommodates 18,000 vessels per year with a maximum size of 400 m should be at least 3,200 m (1.72 nm) wide.

Applying this calculation to the Proposed Development, the number of potential navigation corridor users per day was estimated as three to four, which corresponds to approximately 1,240 vessels per year. Under the MARIN guidance this leads to an assumption that two vessels should be able to pass side by side through the corridor. Therefore, the overall corridor width (inclusive of the separation between the flank vessels and the array) is 0.28 nm (524 m). Applying the MGN 654 Shipping Route Template value of 1 nm between the flank vessels and the array, the overall corridor width is 2.1 nm.

19.1.6 Application of International Regulations for Preventing Collisions at Sea

The COLREGs are the rules and regulations that help regulate vessel traffic movements throughout the world. It is therefore important that the navigation corridor does not prevent a vessel from being able to comply with these regulations. Although the COLREGs do not make specific provision for a separation between offshore wind farms such as a navigation corridor, they do lay down rules for navigating within a narrow channel which may be somewhat applicable.

Rule 9a states:

A vessel proceeding along the course of a narrow channel or fairway shall keep as near to the outer limit of the channel or fairway which lies on her starboard side as is safe and practicable.

However, a vessel should not enter the gap unless it is confident that it can alter course and manoeuvre as required to comply with the collision regulations and avoid a collision. Course alterations within the gap should not be required under most circumstances given that vessels will be able to navigate straight through on a generally north-south bearing.

Rule 9b states:

A vessel of less than 20 m in length or a sailing vessel shall not impede the passage of a vessel which can safely navigate only within a narrow channel or fairway.

Furthermore, Rule 9c states:

A vessel engaged in fishing shall not impede the passage of any other vessel navigation within a narrow channel or fairway.

Although the COLREGs give priority to vessels navigating within a narrow channel it is still prudent for the purpose of minimising the navigational risk to consider any dense activity involving relevant small craft.

From analysis of non-commercial vessel traffic (see section 10.1.2 and Appendix E), it can be seen that there is moderate fishing vessel activity within and in proximity to the navigation corridor including active fishing as well as transits. Recreational vessel activity within and in proximity to the navigation corridor is relatively low, primarily consisting of north-south transits. However, from consultation there is potential for recreational users to be discouraged from navigating in the area (see 27 July 2022 entry in Table 4.1).

The shape of the navigation corridor is suitable for identifying small craft whilst making passage through the navigation corridor. Although not a conventional parallelogram in shape, the navigation corridor is shaped such that vessels have a clear view of any small craft located at the other end or side of the corridor, including in low visibility.

19.1.7 Effect of Non-Transit Users

As noted in section 10.1.2.3 and Appendix E, there are moderate volumes of fishing activity located in proximity to the navigation corridor. A fishing vessel engaged in fishing activities may be unable to make a manoeuvre in sufficient time to avoid an oncoming commercial vessel making passage through the corridor. However, the considerable minimum spacing between structures in proximity to the corridor within the Proposed Development array area (minimum spacing of 1,000 m) and the Inch Cape array area (consented minimum spacing of 1,278 m (ICOL, 2018)) will assist with earlier detection by passing vessels of any smaller craft present within or on the other side of the corridor.

For vessels associated with the Proposed Development, any movements within or in proximity to the corridor will be made in line with the designed-in mitigation measures (see section 17) including compliance with the COLREGs and MGN 372 (MCA, 2008).

A similar mitigation measure is provided in the Inch Cape EIA Report (ICOL, 2018) in relation to vessels associated with Inch Cape works:

Appropriate marine coordination (through a dedicated marine coordination function) of the Development's own vessels will be implemented in order to ensure that construction vessels do not create additional risk to third parties.

With these mitigation measures in place, it is not anticipated that vessels (either for the Proposed Development or Inch Cape) will have any detrimental effect on the ability of navigation corridor users to make passage safely.

19.1.8 Radar Interference

For vessels transiting through the navigation corridor there may be a potential for increased exposure to radar interference. This is considered fully in section 13.8 as part of the wider assessment of risks associated with navigation, communication and position fixing equipment and is not considered to have a significant effect. In particular, it is very unlikely that vessels will navigate within 0.5 nm of a wind turbine (the distance at which intolerable risks can be experienced).

19.1.9 Consultation

The cumulative scenario has been highlighted throughout the scoping and EIA process for the Proposed Development. For example, the shipping and navigation section of the Scoping Report included a targeted question for consultees in relation to the scope of the cumulative assessment and what effects may be seen at a cumulative level (RPS Energy, 2021). This was mirrored in the round of Regular Operator consultation undertaken (see Appendix D) and the cumulative scenario was a key consideration during the Hazard Workshops that involved representatives for multiple shipping and navigation users.

Comments received relating to the proposed navigation corridor – which are provided in Table 4.1 – are summarised in the following paragraphs.

19.1.9.1 Maritime and Coastguard Agency

The MCA commented during a consultation meeting that any navigation corridors would need to be in accordance with MGN 654 and local consultation with regular users and ports is key for any navigation corridor assessment. The MCA also stated during the first Hazard Workshop that an adjustment to the north-west boundary of the Proposed Development array area should be considered to allow vessels more space when navigating between the Proposed Development array area and Inch Cape.

19.1.9.2 UK Chamber of Shipping

The MCA’s suggestion for an adjustment to the boundary of the Proposed Development array area (as presented at the first Hazard Workshop) was echoed by the UK Chamber of Shipping in email correspondence, noting that vessels may choose to pass east or west of both the Proposed Development array area and Inch Cape rather than use the navigation corridor.

19.1.9.3 Fishermen’s Mutual Association

The FMA commented during the first Hazard Workshop that fishing vessels will be forced into the navigation corridor and have to share the space with commercial vessels. The consequences of a collision incident between a commercial vessel and a fishing vessel could be significant noting that the bend in the navigation corridor (as presented at the first Hazard Workshop) increases the probability of a collision incident occurring.

The FMA also indicated that vessels may be wary of utilising the navigation corridor in adverse weather, adding in the second Hazard Workshop that larger tankers may face increased risks due to the Marr Bank, particularly in adverse weather.

19.1.9.4 Northern Lighthouse Board

NLB commented during the first Hazard Workshop that large vessels would be more comfortable transiting east of the Proposed Development with only smaller vessels likely to utilise the navigation corridor (as presented at the first Hazard Workshop). NLB also highlighted in a Scoping Opinion response that the potential ‘funnelling’ of vessel traffic between offshore wind farm developments was of particular interest.

19.1.9.5 Royal Yacht Association Scotland

RYA Scotland commented during the first Hazard Workshop that if commercial traffic chooses to make passage through the navigation corridor (as presented at the first Hazard Workshop) then recreational users may be discouraged from navigating in that area. However, during the second Hazard Workshop, RYA Scotland acknowledged that some recreational vessels may choose to cut across the eastern extent of the Inch Cape array area, thus avoiding the potential for increased interaction in the navigation corridor.

RYA Scotland indicated during the second Hazard Workshop that the refinement of the Proposed Development array area reduces the level of concern for recreational users. Additionally, the alignment of the western boundary of the Proposed Development array area with the western boundary of Seagreen is a positive change since it is now clearer how vessels will transit the area, which will assist with passage planning.

19.1.9.6 Scottish Whitefish Producers Association

The Scottish Whitefish Producers Association indicated during the second Hazard Workshop that the refinement of the Proposed Development array area is beneficial. This is particularly important given that the overall size of the Proposed Development array area will require careful passage planning for any internal navigation within the array.

19.1.9.7 Forth Ports

Forth Ports commented during the second Hazard Workshop that the proximity of the other offshore wind farms in the region could form a ‘crossroads’ which may create a pinch point. Additionally, the region is known to experience significant adverse weather and (prior to the construction of Inch Cape) vessels transiting east-west to/from the River Tay will need to navigate through the gap between the Proposed Development array area and Seagreen.

19.1.9.8 Regular Operators

In Regular Operator responses, both HAV Ship Management and North Star Shipping indicated that there were no concerns with the safety of their vessels foreseen when considering the cumulative scenario. In contrast, Evergas indicated that their vessels would deviate around the south and east of the Proposed Development array area since this would be safer than utilising the navigation corridor (as presented at the first Hazard Workshop) or making passage inshore of Inch Cape given the difficult situation that would develop in the event of machinery failure.

19.1.10 Refinement of Proposed Development Array Area

As detailed in section 6.1.1.1 and noted in some of the consultation feedback, the extent of the Proposed Development array area has been refined markedly during the NRA process, including at the north western corner. This change was primarily driven by the need to increase the width of the gap between the Proposed Development array area and Inch Cape in line with the feedback received in the first Hazard Workshop.

The minimum width of the gap has been increased from approximately 2.1 nm to 4.1 nm, with the shape of the gap also changing to become closer to a conventional parallelogram. This increase in width assists in ensuring that there is sufficient sea room available for vessels to safely navigate through the gap including in the event of collision avoidance action being required (as indicated by the various width calculations undertaken in the previous subsections). Additionally, the shape of the gap has become closer to a conventional parallelogram in shape, such that vessels should have a clearer view of each other when approach and navigating within the gap, further reducing the collision risk.

19.1.11 Embedded Mitigation Measures

The following mitigation measures will assist in ensuring that the navigational risk associated with the navigation corridor between the Proposed Development array area and Inch Cape is ALARP:

- Compliance with MGN 654 and its annexes where applicable as part of the Design Specification and Layout Plan;
- Lighting and marking of the Proposed Development array area in agreement with NLB and in line with IALA Recommendation O-139 (IALA, 2021 (a)) and Guidance G1162 (IALA, 2021 (b));
- Marine coordination and communication to manage vessel movements;

- Compliance of all vessels associated with the Proposed Development with international marine regulations as adopted by the Flag State, notably the COLREGs (IMO, 1972/77) and SOLAS (IMO, 1974);
- Promulgation of information for vessel routes, timings and locations, Safety Zones and advisory passing distances as required via Kingfisher Bulletins; and
- The buoyed construction area size and location will consider the need to maintain safe navigation through the navigation corridor, noting that this will be determined post consent in agreement with NLB.

It is noted that no part of the navigation corridor is within the Order Limits for the Proposed Development or Inch Cape. Therefore, no infrastructure associated with either development (including subsea cables) will be located within the navigation corridor.

19.1.12 Summary and Conclusion

This safety case has considered the following in relation to the navigation corridor between the Proposed Development array area and Inch Cape:

- Relevant navigational features within or in proximity to the navigation corridor;
- Number, size and speed of potential navigation corridor users;
- Relevant guidance and legislation including MGN 654, PIANC guidance and MARIN guidance as well as the COLREGs;
- Non-transit users and activities;
- Radar interference;
- Consultation undertaken with relevant stakeholders including Regular Operators; and
- Embedded mitigation measures.

Table 19.1 summarises the outcome of the various width calculations undertaken based on relevant guidance.

Table 19.1 Summary of Navigation Corridor Width Calculations

Guidance	Minimum Width Required for Navigation Corridor (nm)	Notes
MGN 654 – vessels overtaking	2.4	With application of 1 nm as minimum passing distance between flank vessels and either array area (as per MGN 654 Shipping Route Template).
MGN 654 – 20-degree rule	1.2	Applied to the minimum navigation corridor width of 3.3 nm.

Guidance	Minimum Width Required for Navigation Corridor (nm)	Notes
PIANC – collision avoidance	2.0	Inclusive of a 500 m safety margin and assuming a collision avoidance turn may be made towards either side of the navigation corridor.
MARIN – vessels overtaking	0.28	With application of two vessel lengths between flank vessels and each array area (as per MARIN guidance).
	2.1	With application of 1 nm as minimum passing distance between flank vessels and each array area (as per MGN 654 Shipping Route Template).

With the provision outlined in section 17 in place, the navigation corridor (which has a minimum width of 4.1 nm) satisfies the various width calculations.

The size of vessels identified as potential corridor users are generally small to moderate, as indicated by the 90th percentile length of 131 m. However, the presence of fishing vessels in proximity to the corridor, including active fishing activities, mean that collision risk is increased but is managed by the navigation corridor’s design being in compliance with MGN 654 which minimises the likelihood of an encounter and allows compliance with COLREGs. This includes in adverse weather conditions noting that the 20-degree rule provided in MGN 654 is designed to account for “deviations from track” in poorer conditions.

On this basis, the navigation corridor can be considered to meet safety of navigation expectations.

19.2 Summary of Cumulative Risk Assessment

To avoid replication of text the cumulative risk assessment (assessment of effects) has been undertaken in [volume 2, chapter 13](#) in line with EIA requirements but does follow the FSA methodology. The following sections however summarise the output of the cumulative risk assessment and any additional mitigation measures required.

Table 19.2 summarises the output of the risk assessment undertaken with consideration of the embedded mitigation measures outlined in section 17. Any additional mitigation measures required above those outlined in section 17 are also summarised.

Table 19.2 Summary of Outputs of Cumulative Risk Assessment

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Construction Phase								
Vessels may be displaced from their existing routes due to construction activities associated with the Proposed Development and the presence of cumulative developments.	Presence of construction activities associated with the Proposed Development and presence of cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	47	Minor	Frequent	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of project vessels during construction may increase the likelihood of vessel to vessel encounters and subsequently increase the collision risk between third-party and project vessels.	Presence of construction activities associated with the Proposed Development and presence of cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; Recreational vessels; and Project vessels. 	50	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision risk between third-party vessels.	Presence of construction activities associated with the Proposed Development and presence of cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	52	Moderate	Remote	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Partially complete and completed structures within the Proposed Development array area and cumulative developments could create an allision risk (powered or drifting) to passing traffic.	Presence of surface infrastructure associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	54	Moderate	Remote	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Access to local ports may be impacted due to construction activities associated with the Proposed Development and the presence of cumulative developments.	Presence of construction activities associated with the Proposed Development and presence of cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	57	Minor	Frequent	Tolerable	None	Tolerable
Operation and Maintenance Phase								
Vessels may be displaced from their existing routes due to the presence of the Proposed Development and cumulative developments.	Presence of surface infrastructure associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	48	Minor	Frequent	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of project vessels during operation may increase the likelihood of vessel encounters and subsequently increase the collision risk between third-party and project vessels.	Presence of operation/maintenance activities associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	50	Moderate	Negligible	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision areas and a subsequent increase in encounters.	Presence of surface infrastructure associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial Fishing vessels; and Recreational vessels. 	53	Moderate	Remote	Tolerable	None	Tolerable
Structures within the Proposed Development array area and cumulative developments could create an allision risk (powered or drifting) to passing vessels.	Presence of surface infrastructure associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial Vessels; Commercial fishing vessels; and Recreational vessels. 	55	Moderate	Remote	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Access to local ports may be impacted due to maintenance activities associated with the Proposed Development and the presence of cumulative developments.	Presence of operation/maintenance activities associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial Vessels; Commercial fishing vessels; and Recreational vessels. 	58	Minor	Frequent	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The implementation of cable protection to cables associated with the Proposed Development and cumulative developments may reduce water depths in proximity and therefore reduced the under keel clearance for third-party traffic.	Presence of subsea cable protection associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	61	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of subsea cables associated with the Proposed Development and cumulative developments may increase the likelihood of interaction for third-party vessels including a snagging risk for anchors and fishing gear.	Presence of subsea cable protection associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Anchored vessels. 	61	Minor	Negligible	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of the Proposed Development and cumulative developments will increase the number of vessels in the area which may result in an increased number of incidents requiring emergency response and may reduce access for SAR responders.	Presence of surface infrastructure associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Emergency responders. 	62	Moderate	Remote	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of infrastructure associated with the Proposed Development and cumulative developments may increase the likelihood of interference with magnetic position fixing equipment for third-party vessels.	Presence of infrastructure (surface and subsea) associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	63	Minor	Negligible	Broadly Acceptable	None	Broadly Acceptable
Decommissioning Phase								

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Vessels may be displaced from their existing routes due to decommissioning activities associated with the Proposed Development and the presence of cumulative developments.	Presence of decommissioning activities associated with the Proposed Development and presence of cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	48	Minor	Frequent	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
The presence of project vessels during decommissioning may increase the likelihood of vessel to vessel encounters and subsequently increase the collision risk between third-party and project vessels.	Presence of decommissioning activities associated with the Proposed Development and presence of cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; Recreational vessels; and Project vessels 	51	Moderate	Extremely Unlikely	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision areas and a subsequent increase in encounters.	Presence of decommissioning activities associated with the Proposed Development and presence of cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	53	Moderate	Remote	Broadly Acceptable	None	Broadly Acceptable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Partially decommissioned structures within the Proposed Development array area and cumulative developments could create an allision risk (powered or drifting) to passing traffic.	Presence of surface infrastructure associated with the Proposed Development and cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	56	Moderate	Remote	Tolerable	None	Tolerable

Description of Hazard	Cause(s)	Relevant Users	Relevant Page within Volume 2, Chapter 13	Severity of Consequence	Frequency of Occurrence	Significance of Risk	Additional Mitigation Measures	Residual Risk
Access to local ports may be impacted due to decommissioning activities associated with the Proposed Development and the presence of cumulative developments.	Presence of decommissioning activities associated with the Proposed Development and presence of cumulative developments.	<ul style="list-style-type: none"> Commercial vessels; Commercial fishing vessels; and Recreational vessels. 	58	Minor	Frequent	Tolerable	None	Tolerable

20 Through Life Safety Management

20.1 Quality, Health, Safety and Environment

Quality, Health, Safety and Environment (QHSE) documentation including a Safety Management System (SMS) will be in place for the Project and will be continually updated throughout the development process. The following subsections provide an overview of this documentation and how it will be maintained and reviewed with reference, where required, to specific marine documentation.

Monitoring, reviewing, and auditing will be carried out on all procedures and activities and feedback actively sought. Any designated person (identified in QHSE documentation), managers, and supervisors are to maintain continuous monitoring of all marine operations and determine if all required procedures and processes are being correctly implemented.

20.2 Incident Reporting

After any incidents, including near misses, an incident report form will be completed in line with the Project QHSE documentation. This will then be assessed for relevant outcomes and reviewed for possible changes required to operations.

The Applicant will maintain records of investigation and analyse incidents in order to:

- Determine underlying deficiencies and other factors that may be causing or contributing to the occurrence of incidents;
- Identify the need for corrective action;
- Identify opportunities for preventative action;
- Identify opportunities for continual improvement; and
- Communicate the results of such investigations.

All investigations shall be performed in a timely manner.

A database (lessons learnt) of all marine incidents will be developed. It will include the outcomes of investigations and any resulting actions. The Applicant will promote awareness of their potential occurrence and provide information to assist monitoring, inspection and auditing of documentation.

When appropriate, the designated person (noted within the Emergency Response Cooperation Plan (ERCoP)) should inform the MCA of any exercise or incidents including any implications on emergency response. If required, the MCA should be invited to take part in incident debriefs.

20.3 Review of Documentation

The Applicant will be responsible for reviewing and updating all documentation including the risk assessments, ERCoP, SMS and, if required, will convene a review panel of stakeholders to quantify risk.

Reviews of the risk register should be made after any of the following occurrences:

- Changes to the development, conditions of operation and prior to decommissioning;
- Planned reviews; and
- Following an incident or exercise.

A review of potential risks should be carried out annually. A review of the response charts should be undertaken annually to ensure that response procedures are up to date and should include any amendments from audits, incident reports and identified deficiencies.

20.4 Inspection of Resources

All vessels, facilities, and equipment necessary for marine operations are to be subject to appropriate inspection and testing to determine fitness for purpose and availability in relation to their performance standards. This will include monitoring and inspection of all aids to navigation to determine compliance with the performance standards specified by NLB.

20.5 Audit Performance

Auditing and performance review are the final steps in QHSE management systems. The feedback loop enables an organisation to reinforce, maintain and develop its ability to reduce risks to the fullest extent, and to ensure the continued effectiveness of the system. The Applicant will carry out audits and periodically evaluate the efficiency of the marine safety documentation.

The audits and possible corrective actions should be undertaken in accordance with standard procedures and results of the audits and reviews should be brought to the attention of all personnel having responsibility in the area involved.

20.6 Safety Management System

The Applicant will manage the risk associated with the activities undertaken at the Proposed Development. An integrated SMS, which ensures that the safety and environmental risks of those activities are ALARP, will be established. This includes the use of remote monitoring and switching for aids to navigation to ensure that if a light is faulty a quick fix can be instigated, which will allow IALA availability requirements to be met.

20.7 Cable Monitoring

The subsea cable routes will be subject to periodic inspection post-construction to monitor the cable protection, including burial depths. Maintenance of the protection will be undertaken as necessary.

If exposed cables or ineffective protection measures are identified during post-construction monitoring, these would be promulgated to relevant sea users including via Notice to Mariners and Kingfisher Bulletins. Where immediate risk was observed, the Applicant would also employ additional temporary measures (such as a guard vessel or temporary buoyage) until such time as the risk was permanently mitigated.

Details will be included in full within the assessment of cable burial and protection document, to be produced post-consent.

20.8 Hydrographic Surveys

As required by annex 4 of MGN 654, detailed and accurate hydrographic surveys will be undertaken periodically at intervals agreed with the MCA.

20.9 Decommissioning Plan

A Decommissioning Plan will be developed post consent. With regards to hazards to shipping and navigation, this will also include consideration of the scenario where upon decommissioning and completion of removal operations, an obstruction is left on-site (attributable to the Proposed Development) which is considered to be a danger to navigation and which it has not proved possible to remove. Such an obstruction may require marking until such time as it is either removed or no longer considered a danger to navigation, the continuing cost of which would need to be met by the Applicant.

21 Summary

This NRA has determined the hazards to shipping and navigation users associated with the Project based upon quantitative and qualitative elements including available datasets and consultation. These hazards have been fed into the risk assessment for shipping and navigation within **volume 2, chapter 13**.

21.1 Consultation

The NRA process has included consultation with stakeholders of relevance to shipping and navigation. This has included consideration of the outputs of the scoping process, direct liaison with key stakeholders (both statutory and non-statutory), outreach to Regular Operators of the area, and two Hazard Workshops. Stakeholders consulted include:

- MCA;
- NLB;
- UK Chamber of Shipping;
- RYA Scotland;
- CA;
- Forth Yacht Clubs Association;
- Evergas;
- HAV Shipping;
- North Star Shipping;
- FMA including representation of SFF;
- RNLI;
- Forth Ports;
- Intrada;
- Regional Inshore Fisheries Group;
- Scottish Whitefish Producers Association;
- FIR for ‘Borders to Cove, ‘Port Seton’, and ‘Montrose and Arbroath’;
- INEOS; and
- Shell.

21.2 Existing Environment

21.2.1 Navigational Features

Key navigational features in the area include the nearby NnG and Seagreen offshore wind farms which are both under construction at the time of writing. The closest port or harbour is Arbroath Harbour, located approximately 23 nm to the north-west, on the Angus coast; however, the major ports in the area in terms of traffic volumes are located within the Firth of Forth. There are 10 charted wrecks located within the Proposed Development array area.

The closest anchorage location to the Proposed Development is the designated anchorage off Dunbar located approximately 3.5 nm to the west of the Skateraw landfall location.

21.2.2 Maritime Incidents

A review of recent incident data from the MAIB and RNLI indicates an average of one to two incidents per year within the Proposed Development array area shipping and navigation study area. The MAIB dataset indicates that incident frequency for the most recent ten years available (2010 to 2019) has decreased over that observed in the previous ten years (2000 to 2009).

21.2.3 Vessel Traffic Movements

Based on the 28 days of vessel traffic data collected via on-site surveys, there was an average of approximately 14 unique vessels per day recorded within the Proposed Development array area shipping and navigation study area. The most common vessel types recorded were cargo vessels, tankers, and commercial fishing vessels.

A total of 14 main commercial routes were identified based on the vessel traffic data studied, with the busiest of these used by one to two vessels a day.

21.3 Future Case Vessel Traffic

Of the 14 main routes identified, it is anticipated that seven will deviate as a result of the Proposed Development array area. The largest percentage increase in terms of overall change in route length was to Routes 5 and 14, with a 0.8% increase. The largest change on an absolute basis was to Route 14, with a 26.0 nm increase; however, this is a transatlantic route, and as such this represented a small change on a relative percentage basis.

21.4 Collision and Allision Risk Modelling

The NRA process included quantitative modelling of the change in allision and collision frequency as a result of the Proposed Development, with consideration given to future cases in terms of potential future traffic increases.

It was estimated that the return period of a vessel being involved in a collision post wind farm was 1,031 years assuming base case traffic levels. This represents a 14% increase in collision frequency compared to the pre wind farm base case result.

The powered allision return period post wind farm was estimated at 6,581 years assuming base case traffic levels. The corresponding drifting allision return period post wind farm was estimated at 12,999 years. The fishing vessel allision return period was estimated at 5.1 years.

21.5 Risk Statement

Based on the findings of the NRA in terms of potential hazards and associated risks, the following hazards listed in Table 18.1 (project in isolation) and Table 19.2 (cumulative) have been assessed in **volume 2, chapter 13**.

Overall, the risk assessment concluded that there will be no significant risks arising from the Proposed Development in isolation with embedded mitigations in place during the construction, operation and maintenance or decommissioning phases.

The cumulative hazards assessed are as per the assessment of the Proposed Development in isolation and the cumulative risk assessment concluded that there will be no significant cumulative risks arising from the Proposed Development in combination with cumulative developments with embedded mitigations in place during the construction, operation and maintenance or decommissioning phases.

22 References

4C Offshore (2018). *Wind farm support vessel to the rescue*. Lowestoft: 4C Offshore. <https://www.4c offshore.com/news/wind-farm-support-vessel-to-the-rescue-nid8059.html> (accessed November 2021).

4C Offshore (2020). *Offshore wind vessel joins search for missing pilot*. Lowestoft: 4C Offshore. <https://www.4c offshore.com/news/offshore-wind-vessel-joins-search-for-missing-pilot-nid17573.html> (accessed November 2021).

Anatec and TCE (2012). *Strategic Assessment of Impacts on Navigation of Shipping and Related Effects on Other Marine Activities Arising from the Development of Offshore Wind Farms in the UK REZ*. Aberdeen: Anatec.

BEIS (2022). *Contracts for Difference Allocation Round 4 results*. London: BEIS.

BWEA (2007). *Investigation of Technical and Operational Effects on Marine Radar Close to Kentish Flats Offshore Wind Farm*. London, UK: BWEA (now RenewableUK), BEIS, MCA & PLA.

DfT (2001). *Identification of Marine Environmental High Risk Areas (MEHRAs) in the UK*. London: DfT.

DfT (2012). *UK Ports: Ship Arrivals*. London: The Stationary Office.

Edinburgh Evening News (2021). *Mum's horrific inflatable ordeal at East Lothian beach as dinghy is swept out to sea*. <https://www.edinburghnews.scotsman.com/lifestyle/family-and-parenting/mums-horrific-inflatable-ordeal-at-east-lothian-beach-as-dinghy-is-swept-out-to-sea-3331559> (accessed November 2021).

Energinet (2014). *Horns Rev 3 Offshore Wind Farm Technical Report no. 12 – Radio Communication and Radars*. Fredericia, Denmark: Energinet.

G+ (2021). *G+ Global Offshore Wind Health & Safety Organisation 2020 Incident Data Report*. London: Energy Institute.

IALA (2021 (a)). *IALA Recommendation O-139 on The Marking of Man-Made Offshore Structures*. Edition 2. Saint Germain en Laye, France: IALA.

IALA (2021 (b)). *IALA Guidance G1162 The Marking of Offshore Man-Made Structures*. Edition 2. Saint Germain en Laye, France: IALA.

ICOL (2018). *Inch Cape Offshore Windfarm (Revised Design) - EIA Report*. Edinburgh: ICOL.

IMO (1972/77). *Convention on International Regulations for Preventing Collisions at Sea (COLREGs) – Annex 3*. London: IMO.

IMO (1974). *International Convention for the Safety of Life at Sea (SOLAS)*. London: IMO.

IMO (2001). *Maritime Safety Committee, 74th Session, Agenda Item 5 – Bulk Carrier Safety: Formal Safety Assessment of Life Saving Appliance for Bulk Carriers*. London: IMO.

IMO (2018). *Revised Guidelines for Formal Safety Assessment (FSA) for Use in the Rule-Making Process*. MSC-MEPC.2/Circ.12/Rev.2. London: IMO.

MAIB (2013). *Casualty Definitions Used by the UK MAIB – From 2012*. London: MAIB.

Marine Scotland (2019). *Defence (Military) – Military exercise areas and danger areas (PEXAs)*. <http://marine.gov.scot/maps/518> (accessed November 2021).

Marine Scotland (2022). *Environmental Impact Assessment Report – Forthwind Offshore Wind Demonstration Project – Methil, Fife*. <https://marine.gov.scot/data/environmental-impact-assessment-report-forthwind-offshore-wind-demonstration-project-methil> (accessed July 2022).

Met Office (2019). *Case studies of past weather events*. Exeter: Met Office. <https://www.metoffice.gov.uk/weather/learn-about/past-uk-weather-events#y2019> (accessed November 2021).

MCA and QinetiQ (2004). *Results of the Electromagnetic Investigations 2nd Edition*. Southampton: MCA and QinetiQ.

MCA (2005). *Offshore Wind Farm Helicopter Search and Rescue Trials Undertaken at the North Hoyle Wind Farm*. Southampton: MCA.

MCA (2008). *Marine Guidance Note 371 (Merchant and Fishing) Offshore Renewable Energy Installations (OREIs): Guidance on UK Navigational Practice, Safety and Emergency Response Issues*. Southampton: MCA.

MCA (2008). *Marine Guidance Note 372 (Merchant and Fishing) Offshore Renewable Energy Installations (OREIs): Guidance to Mariners Operating in the Vicinity of UK OREIs*. Southampton: MCA.

MCA (2021). *Marine Guidance Note 654 (Merchant and Fishing) safety of Navigation: offshore Renewable Energy Installations (OREIs) – Guidance on UK Navigational Practice, Safety and Emergency Response*. Southampton: MCA.

Moray Offshore Renewables (2012). *Environmental Statement Technical Appendix 4.3D – Electromagnetic Fields Modelling*. http://marine.gov.scot/datafiles/lot/morl/Environmental_statement/Volumes%208%20to%2011%20-%20Technical%20Appendices/Volume%2010%20Part%201%20-%20Biological%20Environment%20Technical%20Appendices/Appendix%204.3%20D%20-%20Electromagnetic%20Fields%20Modelling.pdf (accessed January 2022).

Nautical Institute (2013). *The Shipping Industry and Marine Spatial Planning (MSP) – A Professional Approach*. London: Nautical Institute.

North Connect (2018). *Chapter 18: Electric and Magnetic Fields & Sediment Heating*. http://marine.gov.scot/sites/default/files/18_emf_sediment_heating_0.pdf (accessed January 2022).

Offshore WIND (2020). *Dudgeon Crew Rescues Injured Fishermen*. Schiedam, Netherlands: Offshore WIND. <https://www.offshorewind.biz/2020/12/23/dudgeon-crew-rescues-injured-fishermen/> (accessed November 2021).

OSPAR (2008). *Background Document on Potential Problems Associated with Power Cables Other Than Those for Oil and Gas Activities*. Paris, France: OSPAR Convention.

PIANC (2018). *Guidance on the Interaction between Offshore Wind Farms and Maritime Navigation*. Brussels: PIANC.

PLA (2005). *Interference to Radar Imagery from Offshore Wind Farms*. 2nd Nautical Offshore Renewable Energy Liaison (NOREL) WP4. London: PLA.

RenewableUK (2014). *Offshore Wind and Marine Energy Health and Safety Guidelines*. Issue 2. London: RenewableUK.

Renews (2019). *Gwynt y Mor vessel answers rescue call*. Winchester: Renew. <https://renews.biz/54133/gwynt-y-mor-vessel-answers-rescue-call/> (accessed November 2021).

RNLI (2016). *Barrow RNLI rescues crew after fishing vessel collides with wind turbine*. Barrow: RNLI. <https://rnli.org/news-and-media/2016/may/26/barrow-rnli-rescues-crew-after-fishing-vessel-collides-with-wind-wind-turbine> (accessed November 2021).

RPS Energy (2020). *Seagreen 2 Scoping Report*. 1st revision. Abingdon: RPS Energy.

RPS Energy (2021). *Berwick Bank Wind Farm Offshore EIA Scoping Report*. Abingdon: RPS Energy.

RYA (2019). *The RYA's Position on Offshore Renewable Energy Developments: Paper 1 (of 4) – Wind Energy*. 5th revision. Southampton: RYA.

RYA (2019). *UK Coastal Atlas of Recreational Boating 2.1*. Southampton: RYA.

RYA and CA (2004). *Sharing the Wind – Recreational Boating in the Offshore Wind Strategic Areas*. Southampton and London: RYA and CA.

Seagreen Wind Energy Ltd. (2020). *Seagreen Offshore Wind Farm – Construction Programme (CoP)*. 3rd revision. Glasgow: Seagreen Wind Energy Ltd.

Seagreen Wind Energy Ltd. (2021). *Seagreen Offshore Wind Farm Safety Zone Application – Wind Turbine Generators*. 1st revision. Glasgow: Seagreen Wind Energy Ltd.

The Isle of Thanet News (2019). *Margate RNLI call out to yacht tied to London Array wind turbine*. Ramsgate: The Isle of Thanet News. <https://theisleofthanetnews.com/2019/05/16/margate-rnli-call-out-to-yacht-tied-to-london-array-wind-wind-turbine/> (accessed November 2021).

UKHO (2021). *Admiralty Sailing Directions North Sea (West) Pilot NP54*. 12th Edition. Taunton: UKHO.

Vessel Tracker (2020). *One Injured in Hard Impact at Wind Turbine*. Vessel Tracker <https://www.vesseltracker.com/en/Ships/Seacat-Ranger-I1746352.html> (accessed November 2021).

Appendix A Marine Guidance Note 654 Checklist

The MGN 654 checklist can be divided into two distinct checklists, one considering the main MGN 654 guidance document and one considering the *Methodology for Assessing Marine Navigational Safety and Emergency Response Risks of OREIs* (MCA, 2021) which serves as Annex 1 to MGN 654.

The checklist for the main MGN 654 guidance document is presented in Table A.1. Following this, the checklist for the MCA's methodology annex is presented in Table A.2. For both checklists, references to where the relevant information and/or assessment is provided in the NRA is given.

Table A.1 MGN 654 Checklist for Main Document

Issue	Compliance	Reference and Notes
Site and Installation Co-ordinates. Developers are responsible for ensuring that formally agreed coordinates and subsequent variations of site perimeters and individual OREI structures are made available, on request, to interested parties at relevant project stages, including application for consent, development, array variation, operation and decommissioning. This should be supplied as authoritative GIS data, preferably in Environmental Systems Research Institute (ESRI) format. Metadata should facilitate the identification of the data creator, its date and purpose, and the geodetic datum used. For mariners' use, appropriate data should also be provided with latitude and longitude coordinates in WGS84 (European Terrestrial Reference System 1989 (ETRS89)) datum.		
Traffic Survey. Includes:		
All vessel types	✓	Section 10: Vessel Traffic Movements All vessel types are considered with specific breakdowns by vessel type given for the Proposed Development array area (see section 10.1) and export cable corridor (see section 10.2) shipping and navigation study areas.
At least 28 days duration, within either 12 or 24 months prior to submission of the ES.	✓	Section 5.2: Vessel Traffic Data Collection Methodology A total of 28 full days of vessel traffic survey data from July 2020 and January 2021 has been assessed within the Proposed Development array area and export cable corridor shipping and navigation study areas.
Multiple data sources	✓	Section 5.2: Vessel Traffic Data Collection Methodology The vessel traffic survey data includes AIS, visual observations and radar for the summer and winter periods in order to ensure maximal coverage of vessels not broadcasting on AIS. Section 5: Data Sources Additional data sources including the RYA Coastal Atlas, VMS, the long term AIS data and consultations input have also been considered.

Issue	Compliance	Reference and Notes
Seasonal variations	✓	<p>Section 5.2: Vessel Traffic Data Collection Methodology A total of 28 full days of vessel traffic survey data from July 2020 and January 2021 has been assessed within the Proposed Development array area and export cable corridor shipping and navigation study areas.</p> <p>Section 5: Data Sources Additional long term data sources including VMS and the long term AIS data have also been considered.</p>
MCA consultation	✓	<p>Section 4: Consultation The MCA has been consulted as part of the NRA process including through the Hazard Workshop.</p>
General Lighthouse Authority (GLA) consultation	✓	<p>Section 4: Consultation NLB has been consulted as part of the NRA process including through the Hazard Workshop.</p>
UK Chamber of Shipping consultation	✓	<p>Section 4: Consultation The UK Chamber of Shipping has been consulted as part of the NRA process including through the Hazard Workshop.</p>
Recreational and fishing vessel consultation	✓	<p>Section 4: Consultation The RYA, CA and FMA have been consulted as part of the NRA process including through the Hazard Workshop.</p>
Port and navigation authorities consultation, as appropriate	✓	<p>Section 4: Consultation Forth Ports has been consulted as part of the NRA process including through the Hazard Workshop.</p>
Assessment of the cumulative and individual effects of (as appropriate):		
i. Proposed OREI site relative to areas used by any type of marine craft.	✓	<p>Section 10: Vessel Traffic Movements Vessel traffic data in proximity to the Proposed Development has been analysed.</p> <p>Section 19: Cumulative Risk Assessment The hazards due to the Proposed Development have been identified for each phase.</p>
ii. Numbers, types and sizes of vessels presently using such areas.	✓	<p>Section 10: Vessel Traffic Movements Vessel traffic data in proximity to the Proposed Development has been analysed and includes breakdowns of daily vessel count, vessel type and vessel size.</p>
iii. Non-transit uses of the area, e.g. fishing, day cruising of leisure craft, racing, aggregate dredging, personal watercraft etc.	✓	<p>Section 7: Navigational Features Section 7.7.3 confirms that there are no marine aggregate dredging areas in the region.</p> <p>Section 10: Vessel Traffic Movements Non-transit users were identified in the vessel traffic survey data and included fishing vessels engaged in fishing activities.</p>

Issue	Compliance	Reference and Notes
iv. Whether these areas contain transit routes used by coastal or deep-draught or international scheduled vessels on passage.	✓	<p>Section 10: Vessel Traffic Movements Main routes have been identified using the principles set out in MGN 654 in proximity to the Proposed Development array area (see section 11.2), with these routes taking into account coastal, deep-draught and internationally scheduled vessels.</p>
v. Alignment and proximity of the site relative to adjacent shipping routes.	✓	<p>Section 7: Navigational Features Section 7.7.1 identifies IMO routing measures in proximity to the Proposed Development.</p>
vi. Whether the nearby area contains prescribed routing schemes or precautionary areas.	✓	<p>Section 7: Navigational Features Section 7.7.1 identifies IMO routing measures in proximity to the Proposed Development and sections 7.5 and 7.7 identify precautionary areas such as anchorage military practice and exercise areas and foul and spoil grounds in proximity to the Proposed Development.</p>
vii. Proximity of the site to areas used for anchorage (charted or uncharted), safe haven, port approaches and pilot boarding or landing areas.	✓	<p>Section 7: Navigational Features Section 7.4 identifies designated anchorage areas in proximity to the Proposed Development and section 7.2.1 identifies nearby ports.</p>
viii. Whether the site lies within the jurisdiction of a port and/or navigation authority.	✓	<p>Section 7: Navigational Features Section 7.2.1 identifies nearby ports and port authority jurisdiction.</p>
ix. Proximity of the site to existing fishing grounds, or to routes used by fishing vessels to such grounds.	✓	<p>Section 10: Vessel Traffic Movements Fishing vessel movements are considered within the Proposed Development array area (Section 10.1.2.3) and export cable corridor (Section 10.2.2.2) shipping and navigation study areas.</p>
x. Proximity of the site to offshore firing/bombing ranges and areas used for any marine military purposes.	✓	<p>Section 7: Navigational Features Section 7.5 identifies military practice and exercise areas in proximity to the Proposed Development.</p>
xi. Proximity of the site to existing or proposed submarine cables or pipelines, offshore oil/gas platform, marine aggregate dredging, marine archaeological sites or wrecks, Marine Protected Area or other exploration/exploitation sites.	✓	<p>Section 7: Navigational Features Section 7.7.6 identifies existing and proposed submarine cables and pipelines in proximity to the Proposed Development, section 7.7.2 identifies oil and gas features in proximity to the Proposed Development, section 7.7.7 identifies marine aggregate dredging areas in proximity to the Proposed Development, section 7.6 identifies charted wrecks in proximity to the Proposed Development and section 7.7.7 identifies MEHRAs in proximity to the Proposed Development.</p>

Issue	Compliance	Reference and Notes
xii. Proximity of the site to existing or proposed OREI developments, in cooperation with other relevant developers, within each round of lease awards.	✓	Section 7: Navigational Features Section 7.1 identifies other offshore wind farm developments in proximity to the Proposed Development.
xiii. Proximity of the site relative to any designated areas for the disposal of dredging spoil or other disposal grounds.	✓	Section 7: Navigational Features Section 7.7.4 identifies foul and spoil ground in proximity to the Proposed Development.
xiv. Proximity of the site to aids to navigation and/or VTS in or adjacent to the area and any impact thereon.	✓	Section 7: Navigational Features Section 7.3 identifies aids to navigation in proximity to the Proposed Development.
xv. Researched opinion using computer simulation techniques with respect to the displacement of traffic and, in particular, the creation of “choke points” in areas of high traffic density and nearby or consented OREI sites not yet constructed.	✓	Section 16: Collision and Allision Risk Modelling Collision and allision risk modelling has been undertaken for the Proposed Development array area.
xvi. With reference to xv. above, the number and type of incidents to vessels which have taken place in or near to the proposed site of the OREI to assess the likelihood of such events in the future and the potential impact of such a situation.	✓	Section 9: Emergency Response Historical vessel incident data published by the MAIB (section 9.5), RNLI (section 9.2) and DfT (section 9.1) in proximity to Proposed Development has been considered alongside historical offshore wind farm incident data throughout the UK (section 9.6).
xvii. Proximity of the site to areas used for recreation which depend on specific features of the area.	✓	Section 10: Vessel Traffic Movements Non-transit users were identified in the vessel traffic survey data and included limited recreational activity.
Predicted effect of OREI on traffic and interactive boundaries. Where appropriate, the following should be determined:		
a. The safe distance between a shipping route and OREI boundaries.	✓	Section 15: Future Case Vessel Traffic A methodology for post wind farm routeing is outlined and includes a minimum distance of 1 nm from offshore installations and wind turbine boundaries.

Issue	Compliance	Reference and Notes
b. The width of a corridor between sites or OREIs to allow safe passage of shipping.	✓	Section 19: Cumulative Risk Assessment Section 19.1 provides a justification for the gap between the Proposed Development array area and Inch Cape to ensure its presence does not result in a significant risk to navigational safety.
OREI structures. The following should be determined:		
a. Whether any feature of the OREI, including auxiliary platforms outside the main generator site, mooring and anchoring systems, inter-device and export cabling could pose any type of difficulty or danger to vessels underway, performing normal operations, including fishing anchoring and emergency response.	✓	Section 16: Collision and Allision Risk Modelling Collision and allision risk modelling has been undertaken for the Proposed Development array area. Section 18: Project in Isolation Risk Assessment Based upon the baseline data and consultation undertaken hazards have been identified and fed into the risk assessment undertaken in volume 2, chapter 13 , including hazards involving anchoring and emergency response.
b. Clearances of fixed or floating wind turbine blades above the sea surface are not less than 22 m (above MHWS for fixed). Floating wind turbines allow for degrees of motion.	✓	Section 17: Embedded Mitigation Measures The minimum blade tip height is included in the maximum design scenario for wind turbines (see Table 18.1).
c. Underwater devices: i. Changes to charted depth; ii. Maximum height above seabed; and iii. Under keel clearance.	✓	Section 6.6: Maximum Design Scenario Inter-array, interconnector and offshore export cables specifications are included in the maximum design scenario for cables (see Table 6.6).
d. Whether structure block or hinder the view of other vessels or other navigational features.	✓	Section 13: Navigation, Communication and Position Fixing Equipment Hazards relating to the use of existing aids to navigation are considered (see section 0). Section 19: Cumulative Risk Assessment Risks to non-transit users on vessels navigating through the gap between the Proposed Development array area and Inch Cape (and the detection of such vessels) has been considered (see section 19.1).

Issue	Compliance	Reference and Notes
The effects of tides, tidal streams and weather. It should be determined whether:		
a. Current maritime traffic flows and operations in the general area are affected by the depth of water in which the proposed installation is situated at various states of the tide, i.e. whether the installation could pose problems at high water which do not exist at low water conditions, and vice versa.	✓	Section 6.6: Maximum Design Scenario The range of water depths within the Proposed Development array area is provided in the maximum design scenario for the Proposed Development boundary (see Table 6.6). Section 8: Meteorological Ocean Data Various states of the tide local to the Proposed Development are provided. Section 10: Vessel Traffic Movements Vessel traffic data in proximity to the Proposed Development has been analysed. Section 16: Collision and Allision Risk Modelling Collision and allision risk models take into account tidal conditions.
b. The set and rate of the tidal stream, at any state of the tide, has a significant effect on vessels in the area of the OREI site.	✓	Section 8: Meteorological Ocean Data Various states of the tide local to the Proposed Development are provided. Section 16: Collision and Allision Risk Modelling The collision and allision risk models take into account tidal conditions.
c. The maximum rate tidal stream runs parallel to the major axis of the proposed site layout, and, if so, its effect.	✓	
d. The set is across the major axis of the layout at any time, and, if so, at what rate.	✓	
e. In general, whether engine failure or other circumstance could cause vessels to be set into danger by the tidal stream, including unpowered vessels and small, low speed craft.	✓	Section 8: Meteorological Ocean Data Various states of the tide local to the Proposed Development are provided and it is noted that hazards are not anticipated at high or low water only. Section 16: Collision and Allision Risk Modelling The drifting allision risk model takes into account tidal conditions and assesses whether machinery failure could cause vessels to be set into danger.
f. The structures themselves could cause changes in the set and rate of the tidal stream.	✓	Section 8: Meteorological Ocean Data No risks are anticipated.

Issue	Compliance	Reference and Notes
g. The structures in the tidal stream could be such as to produce siltation, deposition of sediment or scouring, affecting navigable water depths in the wind farm area or adjacent to the area.	✓	Section 19: Cumulative Risk Assessment Identifies the hazards due to the Proposed Development on shipping and navigation for each phase including in relation to changes in under keel clearance.
h. The site, in normal, bad weather, or restricted visibility conditions, could present difficulties or dangers to craft, including sailing vessels, which might pass in close proximity to it.	✓	Section 8: Meteorological Ocean Data Weather and visibility data local to the Proposed Development is provided. Section 10: Vessel Traffic Movements Vessel traffic data in proximity to the Proposed Development has been analysed including recreational vessels. Section 11: Adverse Weather Vessel Traffic Movements Alternative routeing used by Regular Operators during periods of adverse weather have been identified. Section 19: Cumulative Risk Assessment Based upon the baseline data and consultation undertaken hazards have been identified and fed into the risk assessment undertaken in volume 2, chapter 13 which is summarised in section 18.
i. The structures could create problems in the area for vessels under sail, such as wind masking, turbulence or sheer.	✓	Section 19: Cumulative Risk Assessment Based upon the baseline data and consultation undertaken hazards have been identified and fed into the risk assessment undertaken in volume 2, chapter 13 .
j. In general, taking into account the prevailing winds for the area, whether engine failure or other circumstances could cause vessels to drift into danger, particularly if in conjunction with a tidal set such as referred to above.	✓	Section 16: Collision and Allision Risk Modelling The drifting allision risk model takes into account weather and tidal conditions and assesses whether machinery failure could cause vessels to be set into danger.
Assessment of access to and navigation within, or close to, an OREI. To determine the extent to which navigation would be feasible within the OREI site itself by assessing whether:		
a. Navigation within or close to the site would be safe:		
i. For all vessels.	✓	Section 4: Consultation Section 4.2 outlines Regular Operator consultation undertaken following the vessel traffic surveys. Section 11: Adverse Weather Vessel Traffic Movements Alternative routeing used by Regular Operators during periods of adverse weather have been identified.
ii. For specified vessel types, operations and/or sizes.	✓	
iii. In all directions or areas.	✓	
iv. In specified directions or areas.	✓	

Issue	Compliance	Reference and Notes
v. In specified tidal, weather or other conditions.	✓	<p>Section 16: Collision and Allision Risk Modelling Collision and allision risk modelling has been undertaken for the Proposed Development array area and includes use of post wind farm routeing, as well as taking account of tidal and weather conditions.</p> <p>Section 19: Cumulative Risk Assessment Based upon the baseline data and consultation undertaken hazards have been identified and fed into the risk assessment undertaken in volume 2, chapter 13.</p>
b. Navigation in and/or near the site should be prohibited or restricted:		
i. For specified vessel types, operations and/or sizes.	✓	<p>Section 13: Navigation, Communication and Position Fixing Equipment Potential hazards on navigation of the different communications and position fixing devices used in and around offshore wind farms are assessed.</p>
ii. In respect of specific activities.	✓	
iii. In all areas or directions.	✓	
iv. Prohibited in specified areas or directions.	✓	<p>Section 16: Collision and Allision Risk Modelling Collision and allision risk modelling has been undertaken for the Proposed Development array area and includes use of post wind farm routeing which assumes commercial vessel traffic avoids the Proposed Development array area.</p> <p>Section 19: Cumulative Risk Assessment Based upon the baseline data and consultation undertaken hazards have been identified and fed into the risk assessment undertaken in volume 2, chapter 13.</p> <p>Section 17: Embedded Mitigation Measures Outlines the embedded mitigation measures to be implemented to reduce the significance of risk of shipping and navigation hazards including the application for Safety Zones.</p>
v. In specified tidal or whether conditions.	✓	
c. Where it is not feasible for vessels to access or navigate through the site it could cause navigational, safety or routeing problems for vessels operating in the area e.g. by preventing vessels from responding to calls for assistance from persons in distress.	✓	<p>Section 16: Collision and Allision Risk Modelling Collision and allision risk modelling has been undertaken for the Proposed Development array area and includes use of post wind farm routeing which assumes commercial vessel traffic avoids the array.</p> <p>Section 19: Cumulative Risk Assessment Based upon the baseline data and consultation undertaken hazards have been identified and fed into the risk assessment undertaken in volume 2, chapter 13.</p>
d. Guidance on the calculation of safe distance of OREI boundaries from shipping routes has been considered.	✓	<p>Section 15: Future Case Vessel Traffic The methodology applied when considering the safe distance at which main routes should be deviated around offshore installations has been described and includes consideration of the Shipping Route Template (see section 15.5.1).</p>

Issue	Compliance	Reference and Notes
SAR, maritime assistance service, counter pollution and salvage incident response.		
The MCA, through HM Coastguard, is required to provide SAR and emergency response within the sea area occupied by all OREIs in UK waters. To ensure that such operations can be safely and effectively conducted, certain requirements must be met by developers and operators.		
a. An ERCoP will be developed for the construction, operation and decommissioning phases of the OREI.	✓	<p>Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including compliance with MGN 654, which requires the creation of an ERCoP.</p>
b. The MCA's guidance document <i>Offshore Renewable Energy Installations: Requirements, Guidance and Operational Considerations for Search and Rescue and Emergency Response</i> (MCA, 2021) for the design, equipment and operation requirements will be followed.	✓	<p>Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including compliance with MGN 654, which requires the fulfilment of requirements in the stated guidance document.</p>
c. A SAR checklist will be completed to record discussions regarding the requirements, recommendations and considerations outlined in Annex 5 (to be agreed with MCA).	✓	<p>Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including compliance with MGN 654, which expects the SAR checklist to be completed.</p>
Hydrography. In order to establish a baseline, confirm the safe navigable depth, monitor seabed mobility and to identify underwater hazards, detailed and accurate hydrographic surveys are included or acknowledged for the following stages and to MCA specifications:		
i. Pre-construction: The proposed generating assets area and proposed cable route.	✓	<p>Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including compliance with MGN 654, which requires the specified hydrographic surveys to be completed.</p>
ii. On a pre-established periodicity during the life of the development.	✓	
iii. Post construction: Cable route(s).	✓	
iv. Post decommissioning of all or part of the development: the installed generating assets area and cable route.	✓	

Issue	Compliance	Reference and Notes
Communications, Radar and positioning systems. To provide researched opinion of a generic and, where appropriate, site specific nature concerning whether:		
a. The structures could produce radio interference such as shadowing, reflections or phase changes, and emissions with respect to any frequencies used for marine positioning, navigation and timing (PNT) or communications, including GMDSS and AIS, whether ship borne ashore or fitted to any of the proposed structures, to:		
i. Vessels operating at a safe navigational distance.	✓	Section 13: Navigation, Communication and Position Fixing Equipment Potential hazards on navigation of the different communications and position fixing devices used in and around offshore wind farms are assessed.
ii. Vessels by the nature of their work necessarily operating at less than the safe navigational distance to the OREI, e.g. support vessels, survey vessels, SAR assets.	✓	
iii. Vessels by the nature of their work necessarily operating within the OREI.	✓	
b. The structures could produce radar reflections, blind spots, shadow areas or other adverse effects:		
i. Vessel to vessel	✓	Section 13: Navigation, Communication and Position Fixing Equipment Potential hazards on navigation of the different communications and position fixing devices used in and around offshore wind farms are assessed.
ii. Vessel to shore	✓	
iii. VTS radar to vessel	✓	
iv. Racon to/from vessel	✓	
c. The structures and generators might produce SONAR interference affecting fishing, industrial or military systems used in the area.	✓	Section 13: Navigation, Communication and Position Fixing Equipment Section 13.9 assesses the potential risk of SONAR interference due to the Proposed Development.
d. The site might produce acoustic noise which could mask prescribed sound signals.	✓	Section 13: Navigation, Communication and Position Fixing Equipment Section 13.10 assesses the potential risk of noise due to the Proposed Development.
e. Generators and the seabed cabling within the site onshore might produce EMFs affecting compasses and other navigation systems.	✓	Section 13: Navigation, Communication and Position Fixing Equipment Section 13.6 assesses the potential risk of electromagnetic interference due to the Proposed Development.

Issue	Compliance	Reference and Notes
Risk mitigation measures recommended for OREI during construction, operation and decommissioning.		
Mitigation and safety measures will be applied to the OREI development appropriate to the level and type of risk determined during the EIA. The specific measures to be employed will be selected in consultation with the MCA and will be listed in the developer's ES. These will be consistent with international standards contained in, for example, Chapter V of SOLAS (IMO, 1974), and could include any or all of the following:		
i. Promulgation of information and warnings through notices to mariners and other appropriate MSI dissemination methods.	✓	Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including the promulgation of information.
ii. Continuous watch by multi-channel VHF, including DSC.	✓	Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including marine coordination.
iii. Safety Zones of appropriate configuration, extent and application to specified vessels ¹⁴ .	✓	Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including use of Safety Zones.
iv. Designation of the site as an area to be avoided (ATBA)	✓	Section 6: Project Design Envelope Relevant to Shipping and Navigation It is not planned to designate the Proposed Development array area as an ATBA (see section 6.1.1).
v. Provision of aids to navigation as determined by the GLA.	✓	Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including the provision of aids to navigation in accordance with Trinity House and MCA requirements.
vi. Implementation of routeing measures within or near to the development.	✓	It is not planned to implement any new routeing measures within or near to the Proposed Development.
vii. Monitoring by radar, AIS, Closed Circuit Television (CCTV) or other agreed means.	✓	Section 17: Embedded Mitigation Measures As required under MGN 654 (MCA, 2021) the Project will agree suitable site mitigation with the MCA.
viii. Appropriate means for OREI operators to notify, and provide evidence of, the infringement of Safety Zones.	✓	Means for notifying and providing evidence of the infringement of Safety Zones will be provided in the Safety Zone Application, submitted post consent.
ix. Creation of an ERCoP with the MCA's SAR branch for the construction phase onwards.	✓	Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including compliance with MGN 654, which requires the creation of an ERCoP.

¹⁴ As per SI 2007 No 1948 "The Electricity (Offshore Generating Stations) (Safety Zones) (Application Procedures and Control of Access) Regulations 2007.

Issue	Compliance	Reference and Notes
x. Use of guard vessels, where appropriate.	✓	Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including the use of guard vessels.
xi. Update NRAs every two years, e.g. at testing sites.	✓	Not applicable to the Proposed Development.
xii. Device-specific or array-specific NRAs.	✓	Section 6.6: Maximum Design Scenario All offshore elements of the Proposed Development have been considered in this NRA including array area and export cable corridor (surface and subsea) infrastructure. Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17 including a Cable Specification and Installation Plan undertaken prior to construction which will serve as additional assessment relating to shipping and navigation.
xiii. Design of OREI structures to minimise risk to contacting vessels or craft.	✓	There is no additional risk posed to craft compared to previous offshore wind farms and so no additional measures are identified.
xiv. Any other measures and procedures considered appropriate in consultation with other stakeholders.	✓	Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17.

Table A.2 MGN 654 Annex 1 checklist

Item	Compliance	Comments
A risk claim is included that is supported by a reasoned argument and evidence.	✓	The risk assessment undertaken in volume 2, chapter 13 provides a risk claim for a range of hazards identified in this NRA which is based on a number of inputs including (but not limited to) baseline data, expert opinion, outputs of the Hazard Workshop, stakeholder concerns and lessons learnt from existing offshore developments.

Item	Compliance	Comments
Description of the marine environment.	✓	Section 7: Navigational Features Relevant navigational features in proximity to the Proposed Development have been described including (but not limited to) other offshore wind farm developments, oil and gas features, aids to navigation, submarine cables and pipelines, charted wrecks, IMO routing measures, ports and MEHRAs. Section 14: Cumulative and Transboundary Overview Potential future developments have been screened in to the cumulative risk assessment where a cumulative or in combination activity has been identified based upon the location and distance from the Proposed Development, including consideration of other offshore wind farms, oil and gas infrastructure and carbon capture infrastructure (surface piercing). Potential future developments have also been screened into the cumulative risk assessment where a concern has been raised during consultation.
SAR overview and assessment.	✓	Section 9: Emergency Response Existing SAR resources in the outer Firth of Forth are summarised including the UK SAR operations contract, RNLI stations and assets and HMCG stations. The risk assessment undertaken in volume 2, chapter 13 includes an assessment of how activities associated with the Proposed Development may restrict emergency response capability of existing resources.
Description of the OREI development and how it changes the marine environment.	✓	Section 6.6: Maximum Design Scenario The maximum extent of the Proposed Development for which any shipping and navigation hazards are assessed is provided including a description of the development boundaries, array area and export cable corridor infrastructure, construction phase programme and indicative vessel and helicopter numbers during the construction and operation and maintenance phases. Section 15: Future Case Vessel Traffic Worst-case alternative routing for commercial traffic has been considered.
Analysis of the vessel traffic, including base case and future traffic densities and types.	✓	Section 10: Vessel Traffic Movements Vessel traffic data in proximity to the Proposed Development has been analysed. Section 15: Future Case Vessel Traffic Future vessel traffic levels have been considered, broken down as increases in traffic associated with ports, commercial fishing vessel activity, recreational vessel activity and traffic associated with the Proposed Development operations. Additionally, worst case alternative routing for commercial traffic has been considered.

Item	Compliance	Comments
Status of the hazard log: <ul style="list-style-type: none">Hazard identification;Risk assessment;Influences on level of risk;Tolerability of risk; andRisk matrix.	✓	Section 3: Navigational Risk Assessment Methodology A tolerability matrix has been defined to determine the tolerability/significance of risks (see section 3.2.1). Appendix B: Hazard Log The complete hazard log is presented and includes a description of the hazards considered, possible causes, consequences (most likely and worst case) and relevant embedded mitigation measures. Using this information, each hazard is then ranked in terms of frequency of occurrence and severity of consequence to give a tolerability/significance level.
NRA: <ul style="list-style-type: none">Appropriate risk assessment;MCA acceptance for assessment techniques and tools;Demonstration of results; andLimitations.	✓	Section 2: Guidance and Legislation MGN 654 and the IMO's FSA guidelines are the primary guidance documents used during the assessment with MGN 372 also used. Section 16: Collision and Allision Risk Modelling Collision and allision risk modelling has been undertaken for the Proposed Development array area with the results outlined numerically and graphically (where appropriate).
Risk control log	✓	Section 17: Embedded Mitigation Measures Embedded mitigation measures have been proposed and are summarised in section 17. The risk assessment undertaken in volume 2, chapter 13 outlines the relevant embedded mitigation measures for each risk assessed.

Appendix B Hazard Log

The complete hazard log, created following the first Hazard Workshop and updated following the second Hazard Workshop, is presented in Table B.1.

Table B.1 Hazard Log

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
Commercial Vessels (Including Cargo, Tanker, Passenger and Oil and Gas)																						
C1	Displacement	Commercial vessels may be displaced from their historical standard routes due to construction activities associated with the Proposed Development	C/D	<ul style="list-style-type: none">Promulgation of informationBuoyed construction areaMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioning	Increased encounters involving commercial vessels that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules	5	1	2	1	3	1.8	Tolerable	Increased encounters involving commercial vessels and impacts on compliance with COLREGs and resulting in increased journey time/distance, impacting on schedules	3	3	3	3	4	3.3	Tolerable	
C2	Displacement	Commercial vessels may be displaced from their existing adverse weather routes due to construction activities associated with the Proposed Development	C/D	<ul style="list-style-type: none">Promulgation of informationBuoyed construction areaMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioningAdverse weather	Commercial vessel is able to identify a suitable alternative route in adverse weather	4	1	1	1	1	1.0	Broadly Acceptable	Commercial vessel is unable to identify a suitable alternative route in adverse weather resulting in an unsafe passage or the passage not being made at all with subsequent impacts on schedules	1	4	3	4	4	3.8	Broadly Acceptable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
C3	Collision risk	The presence of project vessels during construction may increase the likelihood of vessel encounters and subsequently increase the collision risk between commercial vessels and project vessels	C/D	<ul style="list-style-type: none">Promulgation of informationMarine coordinationCompliance of project vessels with international marine regulationsApplication for safety zones	<ul style="list-style-type: none">Presence of project vessels associated with construction/decommissioningUnfamiliarity with project vessel construction/decommissioning activities	Increased encounters involving commercial vessels and project vessels that do not impact on compliance with the COLREGs	4	1	1	1	1	1.0	Broadly Acceptable	Increased encounters involving commercial vessels and project vessels that impact on compliance with COLREGs and result in collisions	1	4	4	4	4	4.0	Broadly Acceptable	
C4	Collision risk	Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision risk for commercial vessels	C/D	<ul style="list-style-type: none">Promulgation of information	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioningAdverse weather	Increased encounters involving commercial vessels that do not impact on compliance with the COLREGs	5	1	1	1	1	1.0	Tolerable	Increased encounters involving commercial vessels that impact on compliance with COLREGs and result in collisions	1	4	4	4	4	4.0	Broadly Acceptable	
C5	Allision risk	Partially complete and completed structures within the Proposed Development array area could create an allision risk (powered or drifting) to passing commercial traffic	C/D	<ul style="list-style-type: none">Marking on Admiralty ChartsPromulgation of informationBuoyed construction areaApplication for safety zonesLighting and markingGuard vessel(s) where appropriate	<ul style="list-style-type: none">Presence of partially complete or completed structuresHuman or navigational errorMechanical or technical failure (of vessel)Adverse weatherUnfamiliarity with Proposed DevelopmentFailure of aid to navigation	Commercial vessel passes structure at unsafe distance and has to make late adjustment to course/speed	4	1	1	1	1	1.0	Broadly Acceptable	Commercial vessel allides with structure resulting in vessel damage, injury and potentially pollution	2	4	4	4	4	4.0	Tolerable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
C6	Port access	Access to local ports for commercial vessels may be impacted due to construction/decommissioning activities associated with the Proposed Development	C/D	<ul style="list-style-type: none">Marine coordinationCompliance of project vessels with international marine regulations	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioning	Increased journey time/distance but does not impact on schedules	4	1	1	1	1	1.0	Broadly Acceptable	Increased journey time/distance impacting on schedules	2	1	1	1	3	1.5	Broadly Acceptable	Details of additional rig movements in the area have been requested by UK Chamber of Shipping.
C7	Displacement	Commercial vessels may be displaced from their existing standard routes due to the presence of the Proposed Development	O	<ul style="list-style-type: none">Promulgation of informationMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of Proposed Development array areaPresence of project vessels associated with operation	Increased encounters involving commercial vessels that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules	5	1	2	1	3	1.8	Tolerable	Increased encounters involving commercial vessels and impacts on compliance with COLREGs and resulting in increased journey time/distance impacting on schedules	3	3	3	3	4	3.3	Tolerable	
C8	Displacement	Commercial vessels may be displaced from their existing adverse weather routes due to the presence of the Proposed Development	O	<ul style="list-style-type: none">Promulgation of informationMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of Proposed Development array areaPresence of project vessels associated with operationAdverse weather	Commercial vessel is able to identify a suitable alternative route in adverse weather	4	1	1	1	1	1.0	Broadly Acceptable	Commercial vessel is unable to identify a suitable alternative route in adverse weather resulting in an unsafe passage or the passage not being made at all with subsequent impacts on schedules	1	4	3	4	4	3.8	Broadly Acceptable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
C9	Collision risk	The presence of project vessels during operation may increase the likelihood of vessel encounters and subsequently increase the collision risk between third-party commercial vessels and project vessels	O	<ul style="list-style-type: none">Promulgation of informationMarine coordinationCompliance of project vessels with international marine regulationsApplication for safety zones	<ul style="list-style-type: none">Presence of project vessels associated with operationUnfamiliarity with project vessel operation activities	Increased encounters involving commercial vessels and project vessels that do not impact on compliance with the COLREGs	4	1	1	1	1	1.0	Broadly Acceptable	Increased encounters involving commercial vessels and project vessels that impact on compliance with COLREGs and result in collisions	1	4	4	4	4	4.0	Broadly Acceptable	
C10	Collision risk	Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision risk for commercial vessels	O	<ul style="list-style-type: none">Promulgation of information	<ul style="list-style-type: none">Presence of Proposed Development array areaPresence of project vessels associated with operationAdverse weather	Increased encounters involving commercial vessels that do not impact on compliance with the COLREGs	5	1	1	1	1	1.0	Tolerable	Increased encounters involving commercial vessels that impact on compliance with COLREGs and result in collisions	1	4	4	4	4	4.0	Broadly Acceptable	
C11	Allision risk	Structures within the Proposed Development array area could create an allision risk (powered or drifting) to passing commercial traffic	O	<ul style="list-style-type: none">Marking on Admiralty ChartsPromulgation of informationApplication for safety zonesLighting and markingGuard vessel(s) where appropriate	<ul style="list-style-type: none">Presence of structuresHuman or navigational errorMechanical or technical failure (of vessel)Adverse weatherUnfamiliarity with Proposed DevelopmentFailure of aid to navigation	Commercial vessel passes structure at unsafe distance and has to make late adjustment to course/speed	5	1	1	1	1	1.0	Tolerable	Commercial vessel allides with structure resulting in vessel damage, injury and potentially pollution	3	4	4	4	4	4.0	Tolerable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
C12	Port access	Access to local ports for commercial vessels may be impacted due to operation activities associated with the Proposed Development	O	<ul style="list-style-type: none">Marine coordinationCompliance of project vessels with international marine regulations	<ul style="list-style-type: none">Presence of Proposed Development array areaPresence of project vessels associated with operation	Increased journey time/distance but does not impact on schedules	4	1	1	1	1	1.0	Broadly Acceptable	Increased journey time/distance impacting on schedules	2	1	1	1	3	1.5	Broadly Acceptable	Details of additional rig movements in the area have been requested by UK Chamber of Shipping.
C13	Anchor interaction	The presence of subsea cables associated with the Proposed Development may increase the likelihood of anchor interaction for commercial vessels including a snagging risk	O	<ul style="list-style-type: none">Marking on Admiralty ChartsPromulgation of informationImplementation and monitoring of cable protectionGuard vessel(s) where appropriate	<ul style="list-style-type: none">Presence of subsea cables and cable protectionHuman or navigational errorMechanical or technical failureAdverse weather	Commercial vessel anchors on or drags anchor over an installed cable/protection but no interaction occurs	1	1	1	1	1	1.0	Broadly Acceptable	Commercial vessel anchors on or drags anchor over an installed cable/protection resulting in damage to the cable/protection and/or anchor	1	1	1	2	2	1.5	Broadly Acceptable	
C1	Displacement	Commercial vessels may be displaced from their historical standard routes due to construction activities associated with the Proposed Development	C/D	<ul style="list-style-type: none">Promulgation of informationBuoyed construction areaMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioning	Increased encounters involving commercial vessels that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules	5	1	2	1	3	1.8	Tolerable	Increased encounters involving commercial vessels and impacts on compliance with COLREGs and resulting in increased journey time/distance, impacting on schedules	3	3	3	3	4	3.3	Tolerable	
Commercial Fishing Vessels (in Transit)																						

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
F1	Displacement	Commercial fishing vessels may be displaced from their historical routes due to construction activities associated with the Proposed Development	C/D	<ul style="list-style-type: none">Promulgation of informationBuoyed construction areaMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioning	Increased encounters involving commercial fishing vessels that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules	4	1	2	1	2	1.5	Broadly Acceptable	Increased encounters involving commercial fishing vessels and impacts on compliance with COLREGs and resulting in increased journey time/distance impacting on schedules	2	3	2	2	3	2.5	Broadly Acceptable	
F2	Collision risk	The presence of project vessels during construction may increase the likelihood of vessel encounters and subsequently increase the collision risk between commercial fishing vessels and project vessels	C/D	<ul style="list-style-type: none">Promulgation of informationMarine coordinationCompliance of project vessels with international marine regulationsApplication for safety zones	<ul style="list-style-type: none">Presence of project vessels associated with construction/decommissioningUnfamiliarity with project vessel construction/decommissioning activities	Increased encounters involving commercial fishing vessels and project vessels that do not impact on compliance with the COLREGs	4	1	1	1	1	1.0	Broadly Acceptable	Increased encounters involving commercial fishing vessels and project vessels that impact on compliance with COLREGs and result in collisions	2	4	3	3	3	3.3	Broadly Acceptable	Project activities may coincide with most active commercial fishing vessel periods since winter is a less attractive time for both vessel types to be active

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
F3	Collision risk	Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision risk for commercial fishing vessels	C/D	<ul style="list-style-type: none">Promulgation of information	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioningAdverse weather	Increased encounters involving commercial fishing vessels that do not impact on compliance with the COLREGs	5	1	1	1	1	1.0	Tolerable	Increased encounters involving commercial fishing vessels that impact on compliance with COLREGs and result in collisions	2	4	3	3	3	3.3	Broadly Acceptable	Displacement of commercial vessels into fishing grounds (particularly at night) may result in increased collision risk for commercial fishing vessels. However, the reduction in the array area has increased available sea room which will reduce resulting displacement and subsequent collision risk.

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
F4	Allision risk	Partially complete and completed structures within the Proposed Development array area could create an allision risk (powered or drifting) to passing commercial fishing traffic	C/D	<ul style="list-style-type: none">Marking on Admiralty ChartsPromulgation of informationBuoyed construction areaApplication for safety zonesLighting and markingGuard vessel(s) where appropriate	<ul style="list-style-type: none">Presence of partially complete or completed structuresHuman or navigational errorMechanical or technical failure (of vessel)Adverse weatherFailure of aid to navigationFailure to account for advisory safe passing distance	Commercial fishing vessel passes structure at unsafe distance and has to make late adjustment to course/speed	4	1	1	1	1	1.0	Broadly Acceptable	Commercial fishing vessel allides with structure resulting in vessel damage, injury and potentially pollution	2	4	3	4	3	3.5	Broadly Acceptable	
F5	Port access	Access to local ports for commercial fishing vessels may be impacted due to construction/decommissioning activities associated with the Proposed Development	C/D	<ul style="list-style-type: none">Marine coordinationCompliance of project vessels with international marine regulations	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioning	Increased journey time/distance but does not impact on schedules	4	1	1	1	1	1.0		Broadly Acceptable	Increased journey time/distance impacting on schedules	1	1	1	1	2		1.3

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
F6	Displacement	Commercial fishing vessels may be displaced from their existing standard routes due to the presence of the Proposed Development	O	<ul style="list-style-type: none">Promulgation of informationMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of Proposed Development array areaPresence of project vessels associated with operation	Increased encounters involving commercial fishing vessels that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules	3	1	2	1	2	1.5	Broadly Acceptable	Increased encounters involving commercial fishing vessels and impacts on compliance with COLREGs and resulting in increased journey time/distance impacting on schedules	2	3	2	2	3	2.5	Broadly Acceptable	Given swell in waves in winter, it will not be possible for fishing vessels to transit through the array during adverse
F7	Collision risk	The presence of project vessels during operation may increase the likelihood of vessel encounters and subsequently increase the collision risk between third-party commercial fishing vessels and project vessels	O	<ul style="list-style-type: none">Promulgation of informationMarine coordinationCompliance of project vessels with international marine regulationsApplication for safety zones	<ul style="list-style-type: none">Presence of project vessels associated with operationUnfamiliarity with project vessel operation activities	Increased encounters involving commercial fishing vessels and project vessels that do not impact on compliance with the COLREGs	4	1	1	1	1	1.0	Broadly Acceptable	Increased encounters involving commercial fishing vessels and project vessels that impact on compliance with COLREGs and result in collisions	2	4	3	3	3	3.3	Broadly Acceptable	Project activities may coincide with most active commercial fishing vessel periods since winter is a less attractive time for both vessel types to be active

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
F8	Collision risk	Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision risk for commercial fishing vessels	O	<div><div></div>Promulgation of information</div>	<div><div></div><div>Presence of Proposed Development array area</div><div>Presence of project vessels associated with operation</div><div>Adverse weather</div></div>	Increased encounters involving commercial fishing vessels that do not impact on compliance with the COLREGs	5	1	1	1	1	1.0	Tolerable	Increased encounters involving commercial fishing vessels that impact on compliance with COLREGs and result in collisions	2	4	3	3	3	3.3	Broadly Acceptable	Displacement of commercial vessels into fishing grounds (particularly at night) may result in increased collision risk for commercial fishing vessels. However, the reduction in the array area has increased available sea room which will reduce resulting displacement and subsequent collision risk.

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
F9	Allision risk	Structures within the Proposed Development array area could create an allision risk (powered or drifting) to passing commercial fishing traffic	O	<ul style="list-style-type: none">▪ Marking on Admiralty Chart▪ Promulgation of information▪ Application for safety zones▪ Lighting and marking▪ Guard vessel(s) where appropriate▪ Compliance with MGN 654	<ul style="list-style-type: none">▪ Presence of structures▪ Human or navigational error▪ Mechanical or technical failure (of vessel)▪ Adverse weather	Commercial fishing vessel passes structure at unsafe distance (including internally within array) and has to make late adjustment to course/speed	5	1	1	1	1	1.0	Tolerable	Commercial fishing vessel allides with structure (including while internally within array) resulting in vessel damage, injury and potentially pollution	3	4	3	4	3	3.5	Tolerable	Concerns raised relating to internal navigation for fishing vessels in adverse weather given the minimum spacing. This will be assessed as part of allision risk in the NRA noting that the minimum spacing is unchanged from that presented in the first Hazard Workshop.
F10	Port access	Access to local ports for commercial fishing vessels may be impacted due to operation activities associated with the Proposed Development	O	<ul style="list-style-type: none">▪ Marine coordination▪ Compliance of project vessels with international marine regulations	<ul style="list-style-type: none">▪ Presence of Proposed Development array area▪ Presence of project vessels associated with operation	Increased journey time/distance but does not impact on schedules	4	1	1	1	1	1.0	Broadly Acceptable	Increased journey time/distance impacting on schedules	1	1	1	1	2	1.3	Broadly Acceptable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
F11	Anchor interaction	The presence of subsea cables associated with the Proposed Development may increase the likelihood of anchor interaction for commercial fishing vessels including a snagging risk	O	<ul style="list-style-type: none">▪ Marking on Admiralty Charts▪ Promulgation of information▪ Implementation and monitoring of cable protection▪ Guard vessel(s) where appropriate	<ul style="list-style-type: none">▪ Presence of subsea cables and cable protection▪ Human or navigational error▪ Mechanical or technical failure▪ Adverse weather	Commercial fishing vessel anchors on or drags anchor over an installed cable/protection but no interaction occurs	2	1	1	1	1	1.0	Broadly Acceptable	Commercial fishing vessel anchors on or drags anchor over an installed cable/protection resulting in damage to the cable/protection and/or anchor	1	1	1	2	2	1.5	Broadly Acceptable	Snagging risk associated with commercial fishing gear will be assessed separately outside the scope of the NRA
Recreational Vessels (2.5 to 24 m LOA)																						
R1	Displacement	Recreational vessels may be displaced from their historical cruising routes due to construction activities associated with the Proposed Development	C/D	<ul style="list-style-type: none">▪ Promulgation of information▪ Buoyed construction area▪ Marking on Admiralty Charts	<ul style="list-style-type: none">▪ Presence of buoyed construction area▪ Presence of project vessels associated with construction/decommissioning▪ Unfamiliarity with the Proposed Development for non-UK sailors	Increased encounters involving recreational vessels that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules	4	1	1	1	2	1.3	Broadly Acceptable	Increased encounters involving recreational vessels and impacts on compliance with COLREGs and resulting in increased journey time/distance impacting on schedules	2	3	2	2	3	2.5	Broadly Acceptable	Continental recreational vessels are less likely to be familiar with the Proposed Development and therefore are more likely to transit through the array

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
R2	Collision risk	The presence of project vessels during construction may increase the likelihood of vessel encounters and subsequently increase the collision risk between recreational vessels and project vessels	C/D	<ul style="list-style-type: none">Promulgation of informationMarine coordinationCompliance of project vessels with international marine regulationsApplication for safety zones	<ul style="list-style-type: none">Presence of project vessels associated with construction/ decommissioningUnfamiliarity with project vessel construction/ decommissioning activitiesUnfamiliarity with the Proposed Development for non-UK sailors	Increased encounters involving recreational vessels and project vessels that do not impact on compliance with the COLREGs	4	1	1	1	1	1.0	Broadly Acceptable	Increased encounters involving recreational vessels and project vessels that impact on compliance with COLREGs and result in collisions	1	4	2	3	2	2.8	Broadly Acceptable	
R3	Collision risk	Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision risk for recreational vessels	C/D	<ul style="list-style-type: none">Promulgation of information	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/ decommissioningUnfamiliarity with the Proposed Development for non-UK sailorsAdverse weather	Increased encounters involving recreational vessels that do not impact on compliance with the COLREGs	5	1	1	1	1	1.0	Tolerable	Increased encounters involving recreational vessels that impact on compliance with COLREGs and result in collisions	1	4	2	3	2	2.8	Broadly Acceptable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
R4	Allision risk	Partially complete and completed structures within the Proposed Development array area could create an allision risk (powered or drifting) to passing recreational traffic	C/D	<ul style="list-style-type: none">Marking on Admiralty ChartsPromulgation of informationBuoyed construction areaApplication for safety zonesLighting and markingGuard vessel(s) where appropriate	<ul style="list-style-type: none">Presence of partially complete or completed structuresHuman or navigational errorMechanical or technical failure (of vessel)Adverse weatherFailure of aid to navigationFailure to account for advisory safe passing distanceUnfamiliarity with the Proposed Development for non-UK sailors	Recreational vessel passes structure at unsafe distance and has to make late adjustment to course/speed	4	1	1	1	1	1.0	Broadly Acceptable	Recreational vessel allides with structure resulting in vessel damage, injury and potentially pollution	2	4	2	3	2	2.8	Broadly Acceptable	Continental recreational vessels are less likely to be familiar with the Proposed Development and therefore are more likely to transit through the array
R5	Port access	Access to local ports for recreational vessels may be impacted due to construction/decommissioning activities associated with the Proposed Development	C/D	<ul style="list-style-type: none">Marine coordinationCompliance of project vessels with international marine regulations	<ul style="list-style-type: none">Presence of buoyed construction areaPresence of project vessels associated with construction/decommissioning	Increased journey time/distance but does not impact on schedules	4	1	1	1	1	1.0	Broadly Acceptable	Increased journey time/distance impacting on schedules	1	1	1	1	1	1.0	Broadly Acceptable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
R6	Displacement	Recreational vessels may be displaced from their existing cruising routes due to the presence of the Proposed Development	O	<ul style="list-style-type: none">Promulgation of informationMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of Proposed Development array areaPresence of project vessels associated with operationUnfamiliarity with the Proposed Development for non-UK sailors	Increased encounters involving recreational vessels that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules	3	1	1	1	2	1.3	Broadly Acceptable	Increased encounters involving recreational vessels and impacts on compliance with COLREGs and resulting in increased journey time/distance impacting on schedules	2	3	2	2	2	2.3	Broadly Acceptable	Continental recreational vessels are less likely to be familiar with the Proposed Development and therefore are more likely to transit through the array
R7	Collision risk	The presence of project vessels during operation may increase the likelihood of vessel encounters and subsequently increase the collision risk between recreational vessels and project vessels	O	<ul style="list-style-type: none">Promulgation of informationMarine coordinationCompliance of project vessels with international marine regulationsApplication for safety zones	<ul style="list-style-type: none">Presence of project vessels associated with operationUnfamiliarity with project vessel operation activitiesUnfamiliarity with the Proposed Development for non-UK sailors	Increased encounters involving recreational vessels and project vessels that do not impact on compliance with the COLREGs	4	1	1	1	1	1.0	Broadly Acceptable	Increased encounters involving recreational vessels and project vessels that impact on compliance with COLREGs and result in collisions	1	4	2	3	2	2.8	Broadly Acceptable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
R8	Collision risk	Displaced vessels may lead to increased traffic densities in certain areas and a subsequent increase in collision risk for recreational vessels	O	<ul style="list-style-type: none">• Promulgation of information	<ul style="list-style-type: none">▪ Presence of Proposed Development array area▪ Presence of project vessels associated with operation▪ Adverse weather▪ Unfamiliarity with the Proposed Development for non-UK sailors	Increased encounters involving recreational vessels that do not impact on compliance with the COLREGs	5	1	1	1	1	1.0	Tolerable	Increased encounters involving recreational vessels that impact on compliance with COLREGs and result in collisions	1	4	2	3	2	2.8	Broadly Acceptable	
R9	Allision risk	Structures within the Proposed Development array area could create an allision risk (powered or drifting) to recreational traffic	O	<ul style="list-style-type: none">▪ Marking on Admiralty Charts▪ Promulgation of information▪ Application for safety zones▪ Lighting and marking▪ Guard vessel(s) where appropriate▪ Compliance with MGN 654▪ Minimum blade clearance	<ul style="list-style-type: none">▪ Presence of structures▪ Human or navigational error▪ Mechanical or technical failure (of vessel)▪ Adverse weather▪ Unfamiliarity with the Proposed Development for non-UK sailors	Recreational vessel passes structure at unsafe distance (including internally within array) and has to make late adjustment to course/speed	5	1	1	1	1	1.0	Tolerable	Recreational vessel allides with structure (including while internally within array) resulting in vessel damage, injury and potentially pollution	3	4	2	4	2	3.0	Tolerable	Continental recreational vessels are less likely to be familiar with the Proposed Development and therefore are more likely to transit through the array
R10	Port access	Access to local ports for recreational vessels may be impacted due to operation activities associated with the Proposed Development	O	<ul style="list-style-type: none">▪ Marine coordination▪ Compliance of project vessels with international marine regulations	<ul style="list-style-type: none">▪ Presence of Proposed Development array area▪ Presence of project vessels associated with operation	Increased journey time/distance but does not impact on schedules	4	1	1	1	1	1.0	Broadly Acceptable	Increased journey time/distance impacting on schedules	1	1	1	1	2	1.3	Broadly Acceptable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
R11	Anchor interaction	The presence of subsea cables associated with the Proposed Development may increase the likelihood of anchor interaction for recreational vessels including a snagging risk	O	<ul style="list-style-type: none">Marking on Admiralty ChartsPromulgation of informationImplementation and monitoring of cable protectionGuard vessel(s) where appropriate	<ul style="list-style-type: none">Presence of subsea cables and cable protectionHuman or navigational errorMechanical or technical failureAdverse weather	Recreational vessel anchors on or drags anchor over an installed cable/protection but no interaction occurs	2	1	1	1	1	1.0	Broadly Acceptable	Recreational vessel anchors on or drags anchor over an installed cable/protection resulting in damage to the cable/protection and/or anchor	1	1	1	2	1	1.3	Broadly Acceptable	Snagging risk associated with commercial fishing gear will be assessed separately outside the scope of the NRA
All Vessels																						
A1	Under keel clearance	The implementation of cable protection to cables associated with the Proposed Development may reduce water depths in proximity and therefore reduce the under keel clearance for all vessels	O	<ul style="list-style-type: none">Marking on Admiralty ChartsPromulgation of informationImplementation and monitoring of cable protection	<ul style="list-style-type: none">Reduction of water depths following installation of cable protection	Vessel transits over an area of reduced clearance causing vibration etc. but does not make contact	5	1	1	1	1	1.0	Tolerable	Vessel makes contact with cable protection resulting in damage to the vessel, injury and potentially pollution	2	3	4	3	3	3.3	Broadly Acceptable	
A2	Interference with navigational equipment	Communication and position fixing equipment may be affected by the presence of installations within the Proposed Development array area or export cable corridor	O	None	<ul style="list-style-type: none">Presence of Proposed DevelopmentHuman error relating to adjustment of radar controls	Installations have no effect upon the radar, communications and navigation equipment on a vessel	5	1	1	1	1	1.0	Tolerable	Minor level of radar interference due to the installations	3	1	1	1	2	1.3	Broadly Acceptable	

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
A3	Use of aids to navigation	The presence of structures associated with the Proposed Development may prevent or limit the use of existing aids to navigation	O	<ul style="list-style-type: none">Lighting and marking	<ul style="list-style-type: none">Visual intrusion from Proposed Development array area	Short-term inability to utilise an aid to navigation but no effect on the vessel's transit	4	1	1	1	1	1.0	Broadly Acceptable	Short-term inability to utilise an aid to navigation (such as Bell Rock) resulting in an allision or grounding incident with damage to vessel, injury and potentially pollution	2	4	4	4	4	4.0	Tolerable	
Emergency Responders																						
E1	Emergency response capability	The presence of the Proposed Development will increase the number of vessels in the area which may result in an increased number of incidents requiring emergency response and may reduce access for SAR responders	C/O/D	<ul style="list-style-type: none">Compliance with MGN 654Lighting and markingMarine coordinationCompliance of project vessels with international marine regulationsMarine Pollution Contingency Plan	<ul style="list-style-type: none">Array not designed to facilitate emergency responder accessAdverse weather	Delay to response request	2	1	1	1	2	1.3	Broadly Acceptable	Delay to response request leading to loss of life	1	5	5	5	5	5.0	Tolerable	
Cumulative – All Vessel Types																						

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
Cumul1	Cumulative displacement leading to increased encounters and collision risk	Vessels may be displaced from their existing standard routes/operational areas due to construction activities associated with the Proposed Development and other offshore developments in the area	C/D	<ul style="list-style-type: none">Promulgation of informationBuoyed construction areaMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of buoyed construction areaBuild out of other offshore developments in the areaPresence of project vessels associated with construction/decommissioningPresence of project vessels located on-site at other offshore developments	Increased encounters that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules/routine	5	1	3	1	4	2.3	Tolerable	Increased encounters involving vessels and impacts on compliance with COLREGs and resulting in increased journey time/distance impacting on schedules/routine Potential for grounding and collision risk also introduced due to deviation into areas with lower water depths and areas of increased vessel density	3	4	4	4	4	4.0	Tolerable	Questions raised over potential for 'crossroads' to be created by traffic passing in different directions in the same sea area. This will be cumulatively assessed in the NRA. The potential for potting activity within the gap between the Proposed Development array area and Seagreen 1 was raised. This will be assessed in liaison with the commercial fisheries chapter of the Offshore EIA Report.

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
Cumul2	Cumulative displacement leading to increased encounters and collision risk	Vessels may be displaced from their existing adverse weather routes due to construction activities associated with the Proposed Development and other offshore developments in the area	C/D	<ul style="list-style-type: none">Promulgation of informationBuoyed construction areaMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of buoyed construction areaBuild out of other offshore developments in the areaPresence of project vessels associated with construction/decommissioningPresence of project vessels located on-site at other offshore developmentsAdverse weather	Vessel is able to identify a suitable alternative route in adverse weather	5	1	1	1	1	1.0	Tolerable	<p>Vessel is unable to identify a suitable alternative route in adverse weather resulting in an unsafe passage or the passage not being made at all with subsequent impacts on schedules/routine</p> <p>Potential for grounding and collision risk also introduced due to deviation into areas with lower water depths and areas of increased vessel density</p>	2	4	4	4	5	4.3	Tolerable	<p>Questions raised over potential for 'crossroads' to be created by traffic passing in different directions in the same sea area. This will be cumulatively assessed in the NRA.</p> <p>The potential for potting activity within the gap between the Proposed Development array area and Seagreen 1 was raised. This will be assessed in liaison with the commercial fisheries chapter of the Offshore EIA Report.</p>

Cumul3	Cumulative displacement leading to increased encounters and collision risk	Vessels may be displaced from their existing standard routes due to the presence of the Proposed Development and other offshore developments in the area	O	<ul style="list-style-type: none"> Promulgation of information Marking on Admiralty Charts 	<ul style="list-style-type: none"> Presence of Proposed Development array area Presence of other offshore developments in the area Presence of project vessels associated with operation Presence of project vessels located on-site at other offshore developments Unfamiliarity with the Proposed Development and other offshore developments for non-UK recreational sailors 	Increased encounters that do not impact on compliance with the COLREGs but result in increased journey time/distance impacting on schedules/routine	5	1	2	1	2	1.5	Tolerable	Increased encounters creating impacts on compliance with COLREGs and resulting in increased journey time/distance impacting on schedules/routine Potential for grounding and collision risk also introduced due to deviation into areas with lower water depths and areas of increased vessel density	4	3	3	3	3	30	Tolerable	Given swell in waves in winter, it will not be possible for fishing vessels to transit through the array, however cumulatively small craft may be pushed into the array bringing risks with winds coming from different direction. Questions raised over potential for 'crossroads' to be created by traffic passing in different directions in the same sea area. This will be cumulatively assessed in the NRA. The potential for potting activity within the gap between the Proposed Development array area and Seagreen 1 was raised. This will be assessed in liaison with the commercial fisheries
--------	--	--	---	--	--	---	---	---	---	---	---	-----	-----------	--	---	---	---	---	---	----	-----------	---

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
																					chapter of the Offshore EIA Report.	

Cumul4	Cumulative displacement leading to increased encounters and collision risk	Vessels may be displaced from their existing adverse weather routes due to construction activities associated with the Proposed Development and other offshore developments in the area	O	<ul style="list-style-type: none">Promulgation of informationMarking on Admiralty Charts	<ul style="list-style-type: none">Presence of buoyed construction areaBuild out of other offshore developments in the areaPresence of project vessels associated with construction/decommissioningPresence of project vessels located on-site at other offshore developmentsAdverse weather	Vessel is able to identify a suitable alternative route in adverse weather	5	1	1	1	1	1.0	Tolerable	Vessel is unable to identify a suitable alternative route in adverse weather resulting in an unsafe passage or the passage not being made at all with subsequent impacts on schedules/routine	2	4	4	4	5	4.3	Tolerable	<p>Given swell in waves in winter, it will not be possible for fishing vessels to transit through the array, however cumulatively small craft may be pushed into the array bringing risks with winds coming from different direction.</p> <p>Questions raised over potential for 'crossroads' to be created by traffic passing in different directions in the same sea area. This will be cumulatively assessed in the NRA.</p> <p>The potential for potting activity within the gap between the Proposed Development array area and Seagreen 1 was raised. This will be assessed in liaison with the commercial fisheries</p>
--------	--	---	---	---	---	--	---	---	---	---	---	-----	-----------	---	---	---	---	---	---	-----	-----------	--

Hazard ID	Hazard Type	Hazard Title	Phase (C/O/D)	Embedded Mitigation	Possible Causes	Most Likely Consequences	Realistic Most Likely Consequences						Worst Case Consequences	Realistic Worst Case Consequences						Further Mitigation and Additional Comments		
							Frequency	Consequences						Risk	Frequency	Consequences					Risk	
								People	Environment	Property	Business	Average Consequence				People	Environment	Property	Business			Average Consequence
																					chapter of the Offshore EIA Report.	

Appendix C Consequences Assessment

This appendix presents an assessment of the consequences of collision and allision incidents, in terms of people and the environment, due to the presence of the Proposed Development wind farm structures.

The significance of risk of the hazards due to the presence of the Proposed Development array area are also assessed based upon risk evaluation criteria and comparison with historical accident data in UK waters¹⁵.

C.1 Risk Evaluation Criteria

C.1.1 Risk to People

With regard to the assessment of risk to people two measures are considered, namely:

- Individual risk; and
- Societal risk.

C.1.1.1 Annual Individual Risk

Individual risk considers whether the risk from an incident to a particular individual changes significantly due to the presence of the Proposed Development. Individual risk considers not only the frequency of the accident and the consequences (e.g., likelihood of death), but also the individual's fractional exposure to that risk, i.e., the probability of the individual being in the given location at the time of the incident.

The purpose of estimating the individual risk is to ensure that individuals who may be affected by the presence of the Proposed Development are not exposed to excessive risks. This is achieved by considering the significance of the change in individual risk resulting from the presence of the Proposed Development relative to the background individual risk levels.

Annual risk levels to crew (the annual risk to an average crew member) for different vessel types are presented in Figure C.1, which also includes the upper and lower bounds for risk acceptance criteria as suggested in IMO Maritime Safety Committee 72/16 (IMO, 2001). The annual individual risk to crew falls within the ALARP region for each of the vessel types presented.

¹⁵ For the purposes of this assessment, UK waters is defined as the UK Exclusive Economic Zone (EEZ) and UK territorial waters refers to the 12 nm limit from the British Isles, excluding the Republic of Ireland.

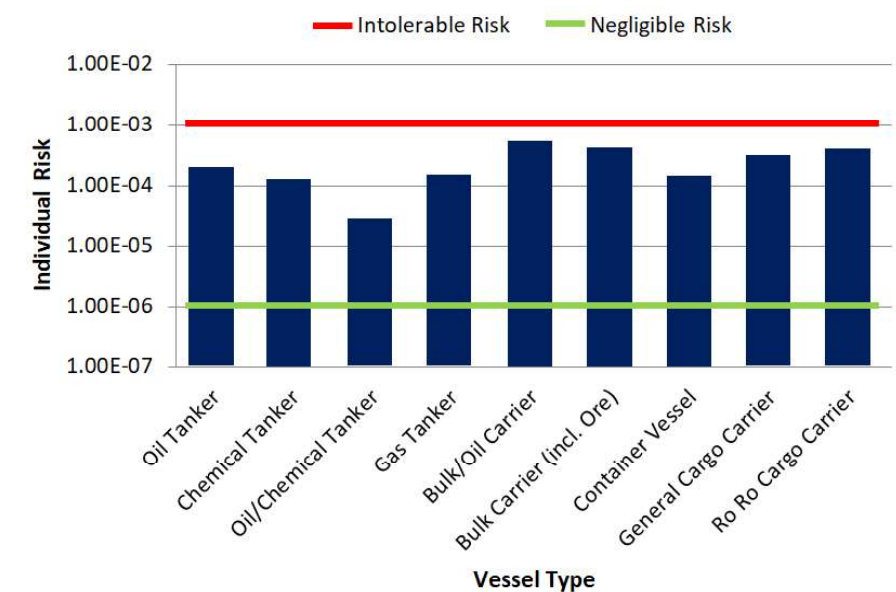


Figure C.1 Individual Risk Levels and Acceptance Criteria per Vessel Type

Typical bounds defining the ALARP regions for decision making within shipping are presented in Table C.1. It can be seen that for a new vessel the target upper bound for ALARP is set lower since new vessels are expected to be safer.

Table C.1 Individual Risk ALARP Criteria

Individual	Lower Bound for ALARP	Upper Bound for ALARP
To crew member	10 ⁻⁶	10 ⁻³
To passenger	10 ⁻⁶	10 ⁻⁴
Third party	10 ⁻⁶	10 ⁻⁴
New vessel target	10 ⁻⁶	Above values reduced by one order of magnitude

On a UK basis, the MCA website presents individual risks for various UK industries based upon HSE data from 1987 to 1991. The risks for different industries are presented in Figure C.2.

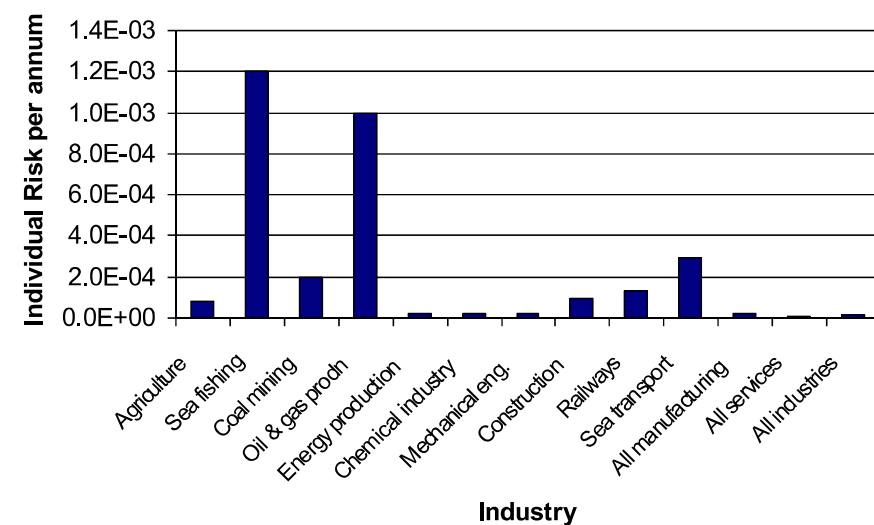


Figure C.2 Individual Risk per Year for Various UK Industries

The individual risk for sea transport of 2.9×10^{-4} per year is consistent with the worldwide data presented in Figure C.1, whilst the individual risk for sea fishing of 1.2×10^{-3} per year is the highest across all of the industries included.

C.1.1.2 Societal Risk

Societal risk is used to estimate risks of accidents affecting many persons (catastrophes) and acknowledging risk adverse or neutral attitudes. Societal risk includes the risk to every person, even if a person is only exposed to risk on one brief occasion. For assessing the risk to a large number of affected people societal risk is desirable because individual risk is insufficient in evaluating risks imposed on large numbers of people.

Within this assessment, societal (navigation-based) risk can be assessed within the Proposed Development array area, giving account to the change in risk associated with each accident scenario caused by the introduction of the wind farm structures. Societal risk may be expressed as:

- Annual fatality rate where frequency and fatality are combined into a convenient one-dimensional measure of societal risk (also known as Potential Loss of Life (PLL)); and
- F-N diagrams showing explicitly the relationship between the cumulative frequency of an accident and the number of fatalities in a multi-dimensional diagram.

When assessing societal risk this study focuses on PLL, which takes into account the number of people likely to be involved in an incident (which is higher for certain vessel types) and assesses the significance of the change in risk compared to the background risk levels.

C.1.2 Risk to Environment

For risk to the environment the key criteria considered in terms of the risk due to the Proposed Development is the potential quantity of oil spilled from a vessel involved in an incident.

It is recognised that there will be other potential pollution, e.g., hazardous containerised cargoes; however, oil is considered the most likely pollutant and the extent of predicted oil spills will provide an indication of the significance of pollution risk due to the Proposed Development compared to background pollution risk levels for the UK.

C.2 Marine Accident Investigation Branch Incident Analysis

C.2.1 All UK Waters Incidents

All British flagged commercial vessels are required to report accidents to the MAIB. Non-UK flagged vessels do not have to report unless they are at a UK port or within 12 nm territorial waters and carrying passengers to a UK port. There are no requirements for non-commercial recreational craft to report accidents to the MAIB; however, a significant proportion of these incidents are reported to and investigated by the MAIB.

Only incidents occurring in UK waters have been considered within this assessment for which the MAIB data is most comprehensive. It is also noted that incidents occurring in ports/harbours and rivers/canals have been excluded since the causes and consequences may differ considerably from an accident occurring offshore, which is the location of most relevance to the Proposed Development.

Taking into account these criteria, a total of 12,093 accidents, injuries and hazardous incidents were reported to the MAIB between 2000 and 2019 involving 13,965 vessels (some incidents, such as collisions, involved more than one vessel).

The locations of all incidents reported in proximity to the UK are presented in Figure C.3, colour-coded by incident type. It is noted that the MAIB aim for 97% accuracy in reporting the location of incidents.

The distribution of unique incidents by year in UK waters is presented in Figure C.4.

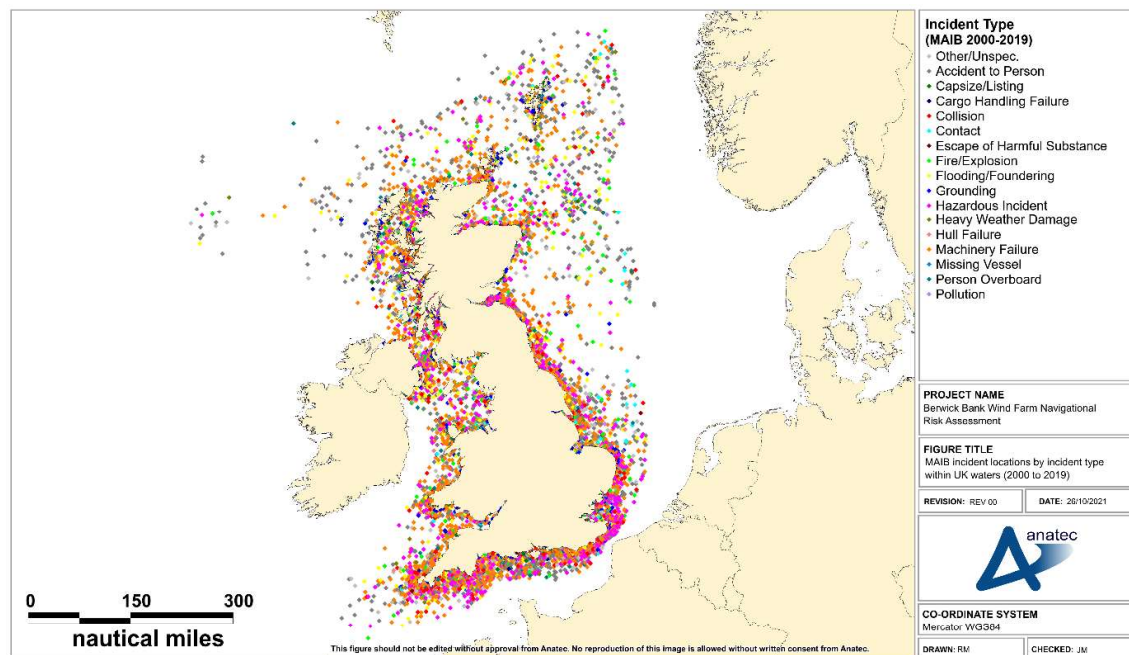


Figure C.3 MAIB Incident Locations by Incident Type within UK Waters (2000 to 2019)

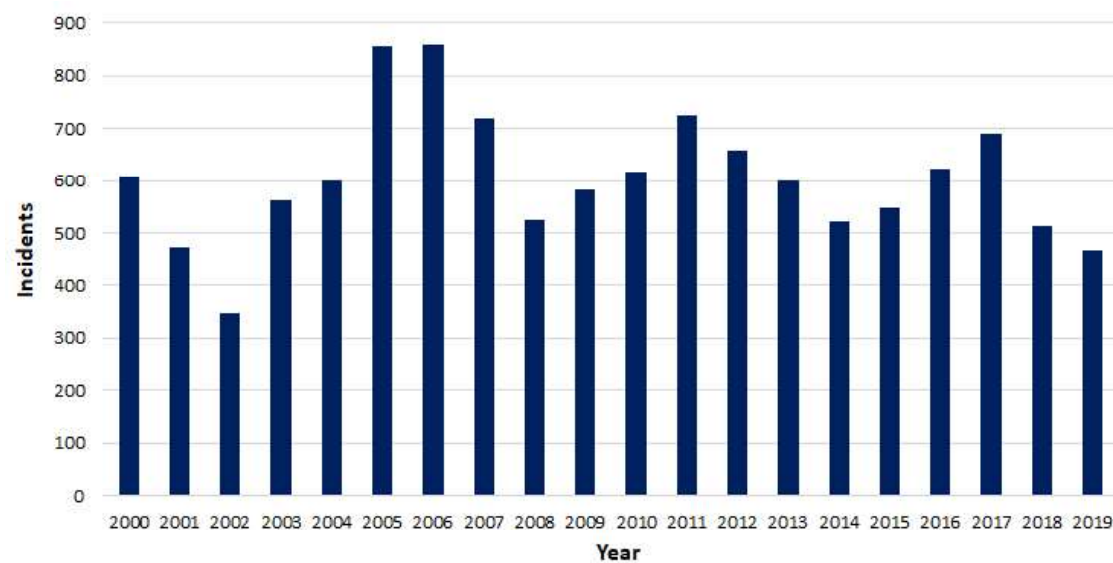


Figure C.4 MAIB Unique Incidents per Year within UK Waters (2000 to 2019)

The average number of unique incidents per year was 605. There has generally been a fluctuating trend in incidents over the 20-year period.

The distribution of incidents in UK waters by incident type is presented in Figure C.5.

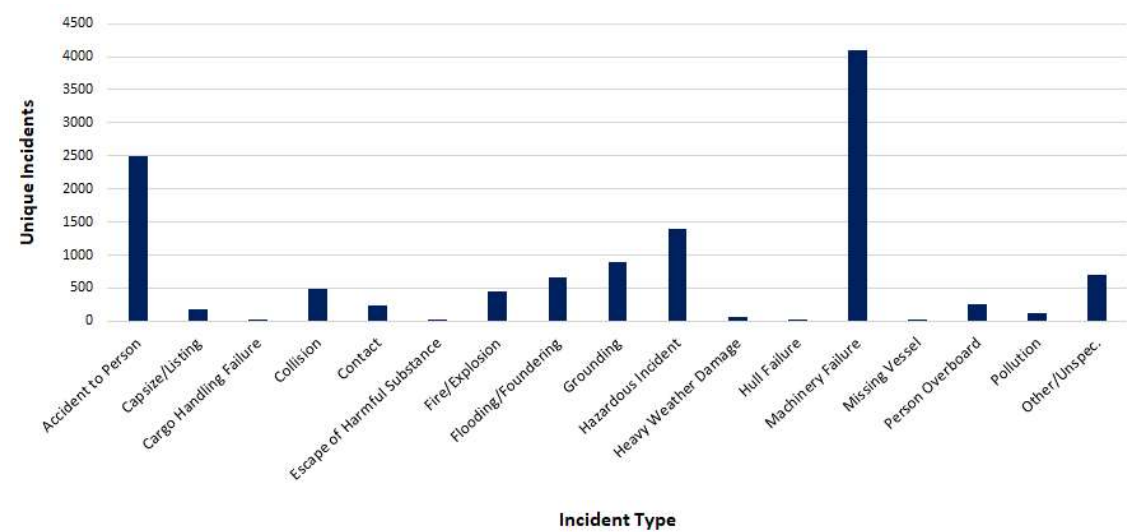


Figure C.5 MAIB Incident Types Breakdown within UK Waters (2000 to 2019)

The most frequent incident types were “machinery failure” (34%), “accident to person” (21%) and “hazardous incident” (12%). “Collision” and “contact” incidents represented 4% and 2% of total incidents, respectively.

The distribution of incidents in UK waters by vessel type is presented in Figure C.6.

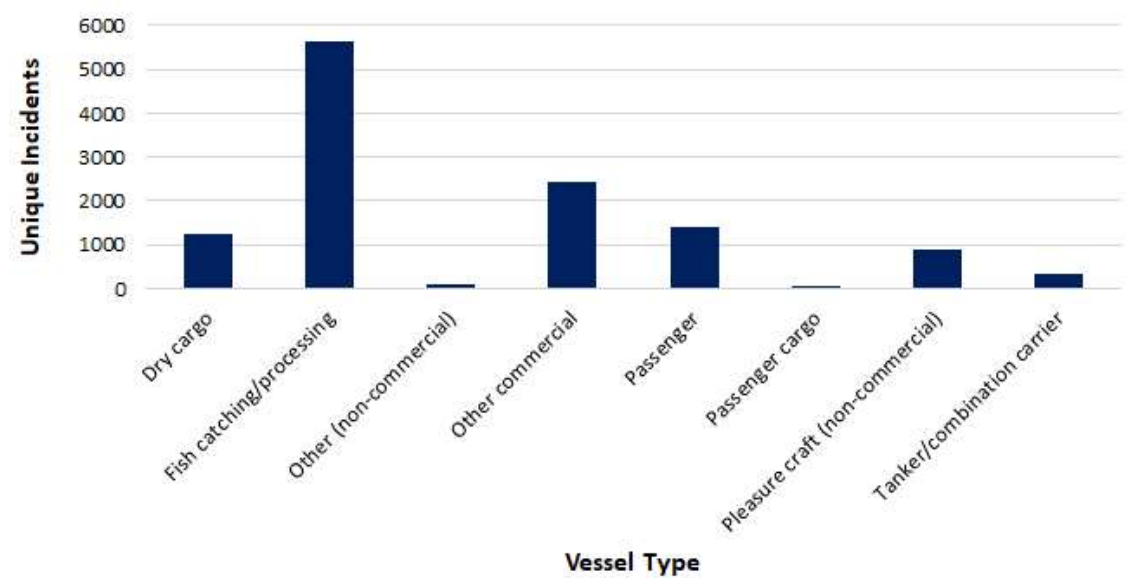


Figure C.6 MAIB Incident Vessel Type Breakdown within UK Waters (2000 to 2019)

The vessel types most frequently involved in incidents were fishing vessels (46%), other commercial vessels (20%) (including offshore industry vessels, tugs, workboats and pilot vessels) and dry cargo vessels (10%).

The total of 373 fatalities were reported in the MAIB incidents within UK waters from 2000 to 2019, averaging 19 fatalities per year.

The distribution of fatalities in UK waters by vessel type and person category (namely crew, passenger and other) is presented in Figure C.7.

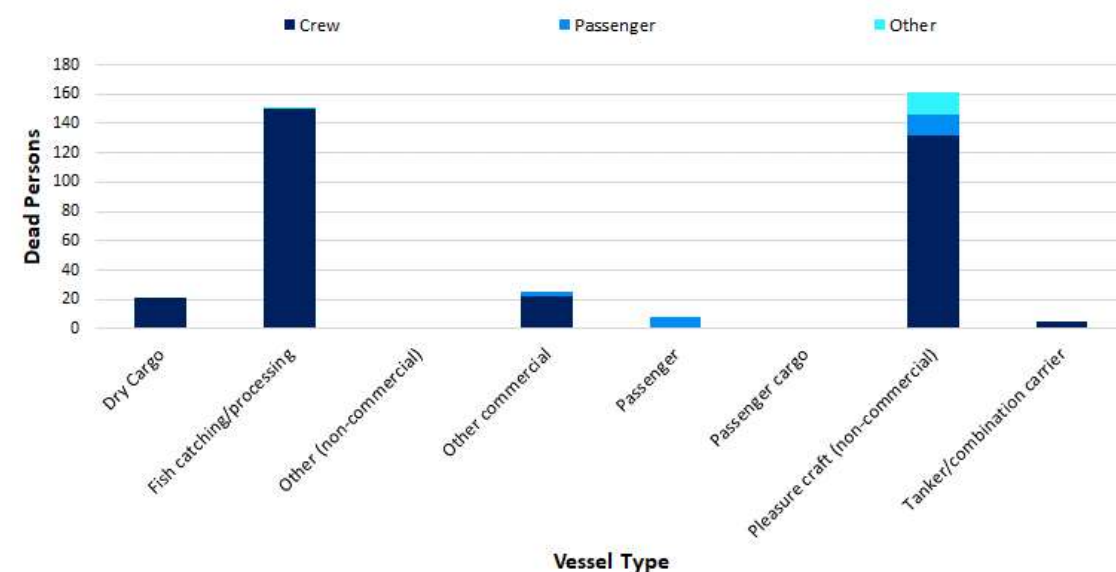


Figure C.7 MAIB Fatalities by Vessel Type within UK Waters (2000 to 2019)

The majority of fatalities occurred to pleasure craft (43%) and fishing vessels (40%), with crew members the main people involved (89%).

C.2.2 Collision Incidents

The MAIB define a collision incident as “ships striking or being struck by another ship, regardless of whether the ships are underway, anchored or moored” (MAIB, 2013).

A total of 481 collision incidents were reported to the MAIB in UK waters between 2000 and 2019 involving 1,090 vessels (in a small number of cases the other vessel involved was not logged).

The locations of collision incidents reported in proximity to the UK are presented in Figure C.8, followed by the distribution of collision incidents per year presented in Figure C.9.

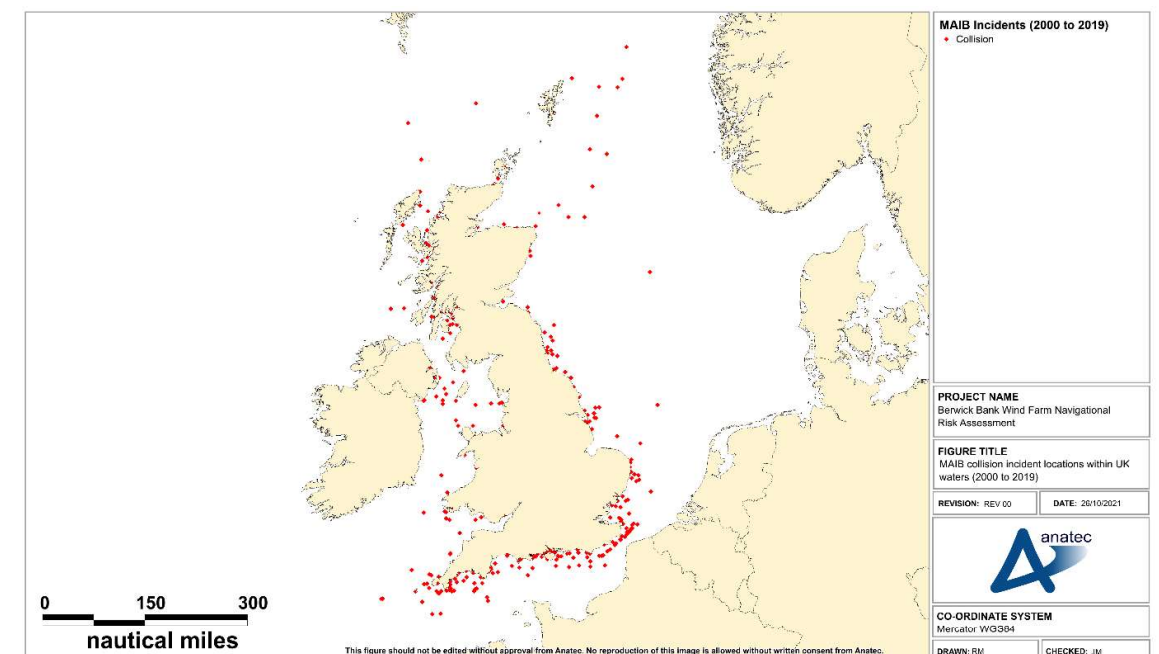


Figure C.8 MAIB Collision Incident Locations within UK Waters (2000 to 2019)

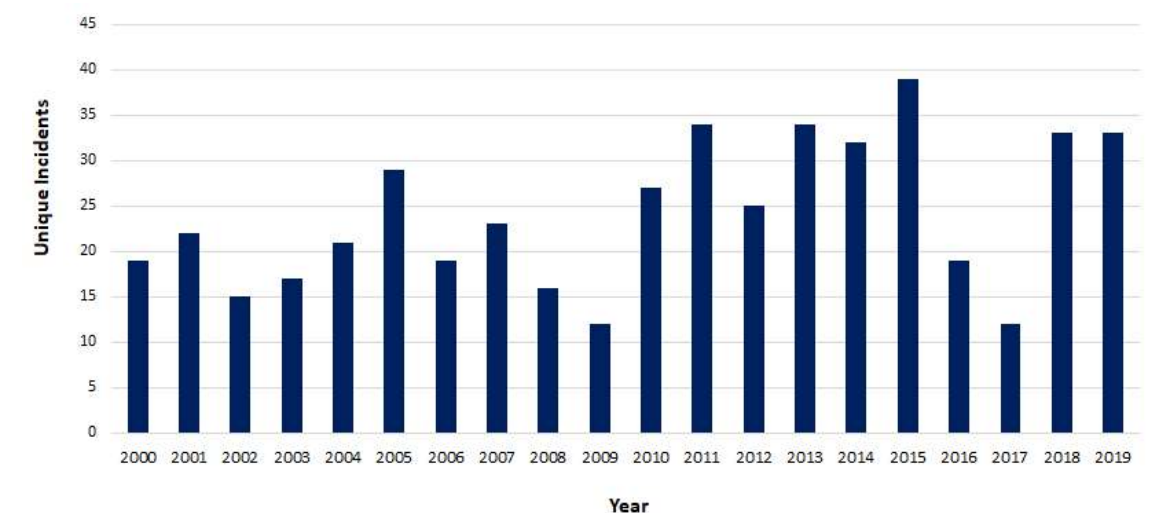


Figure C.9 MAIB Annual Collision Incidents within UK Waters (2000 to 2019)

The average number of unique collision incidents per year was 14. There has been an overall slight increasing trend in collision incidents over the 20-year period, which may be due to better reporting of less serious incidents in recent years.

The most common vessel types involved in collision incidents were other commercial vessels (29%), fishing vessels (24%), non-commercial pleasure craft (23%), and dry cargo vessels (12%).

The total of six fatalities were reported in MAIB collision incidents within UK waters between 2000 and 2019. Details of each of these fatal incidents reported by the MAIB are presented in Table C.2.

Table C.2 Description of Fatal MAIB Collision Incidents (2000 to 2019)

Date	Description	Fatalities
October 2001	Collision between dry cargo vessel and chemical tanker following lateness by watchkeepers in taking effective action. Dry cargo vessel sank with five of the six crew members rescued.	1
July 2005	Collision between two powerboats at night. Both vessels were unlit and both helmsmen had consumed alcohol. One of the helmsmen died.	1
October 2007	Collision between fishing vessel and coastal general cargo vessel following failure to keep an effective lookout. Fishing vessel sank with three of the four crew members abandoning ship into a life raft but the fourth crew member was not recovered.	1
August 2010	Collision between passenger ferry and fishing vessel. Fishing vessel sank with one of the two crew members recovered from the sea but the other member was not recovered despite an extensive search.	1
June 2015	Collision between Rigid-hulled Inflatable Boat (RIB) and yacht. Believed that around a dozen persons were onboard the motorboat with the majority taken ashore by lifeboat. One person seriously injured and airlifted to hospital before being pronounced dead later.	1
June 2018	Collision between power boats during a race. One of the vessels overturned with the pilot pronounced dead at the scene.	1

C.2.3 Contact Incidents

The MAIB define a contact incident as “ships striking or being struck by an external object. The objects can be: floating object (cargo, ice, other or unknown); fixed object, but not the sea bottom; or flying object” (MAIB, 2013).

A total of 235 contact incidents were reported to the MAIB within UK waters between 2000 and 2019 involving 270 vessels (in a small number of cases the contact involved a moving vessel and a stationary vessel).

The locations of contact incidents reported in proximity to the UK are presented in Figure C.10. The distribution of contact incidents is presented in Figure C.11.

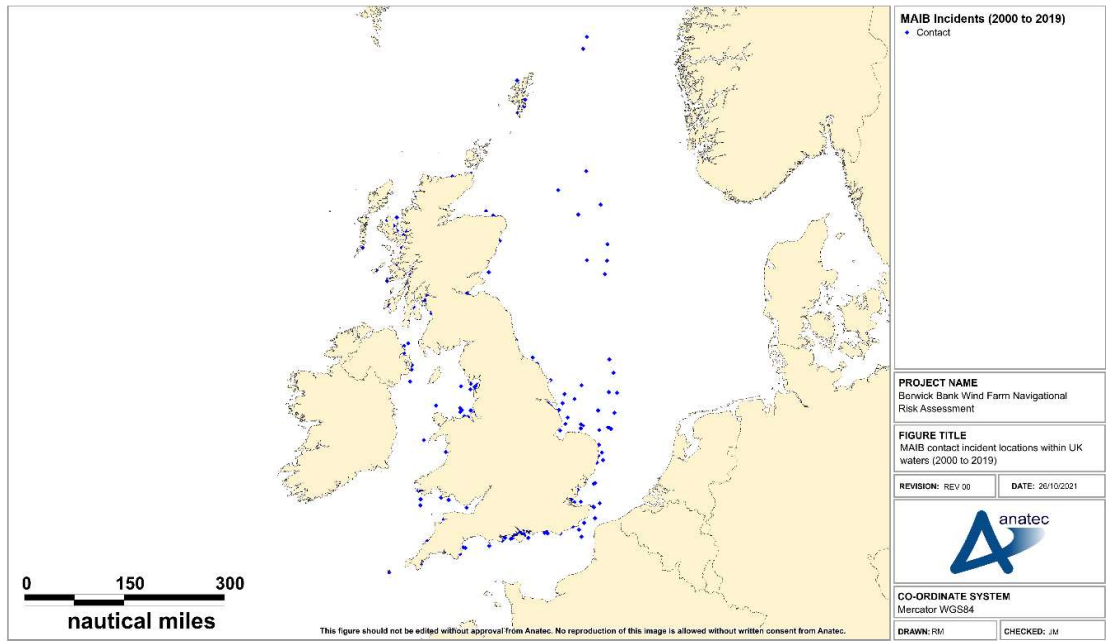


Figure C.10 MAIB Contact Incident Locations within UK Waters (2000 to 2019)

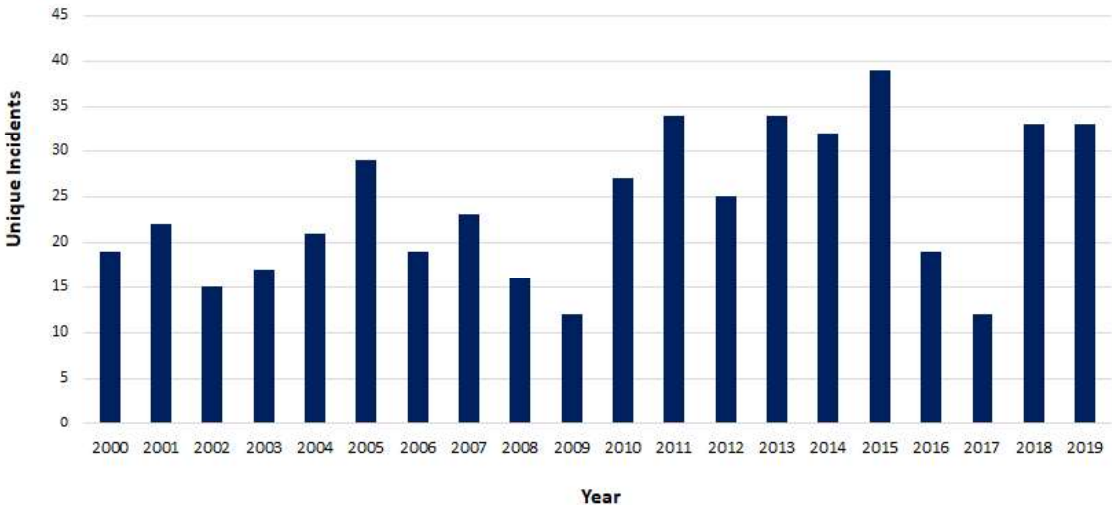


Figure C.11 MAIB Contact Incidents per Year within UK Waters (2000 to 2019)

The average number of contact incidents per year was 12. As with collision incidents, there has been an overall slight increasing trend over the 20-year period, which may be due to better reporting of less serious incidents in recent years.

The distribution of vessel types involved in contact incidents is presented in Figure C.12.

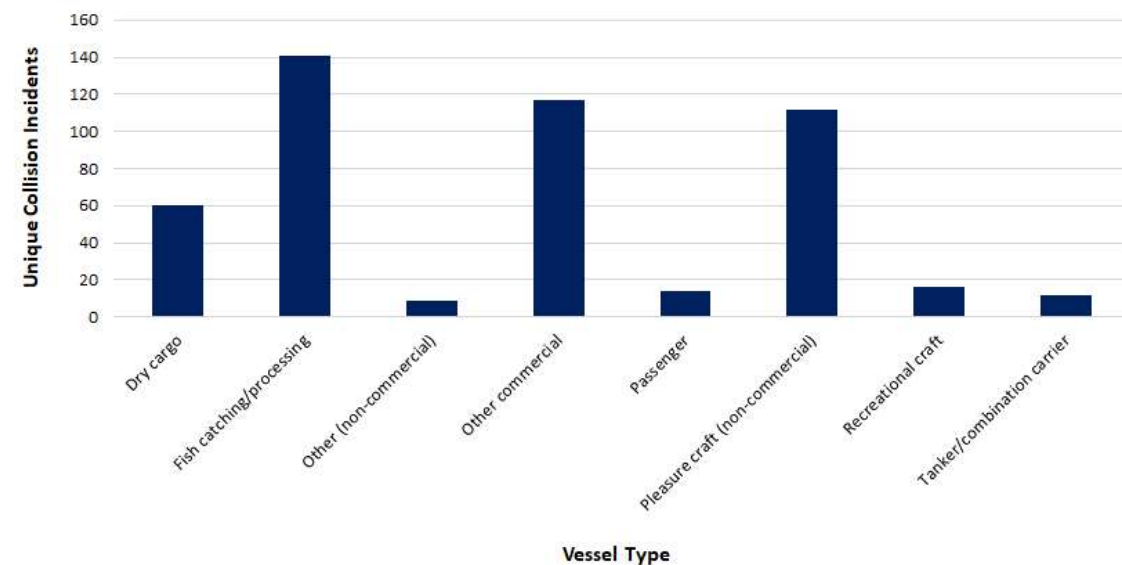


Figure C.12 MAIB Contact Incidents by Vessel Type within UK Waters (2000 to 2019)

The most commonly involved vessel types in contact incidents were other commercial vessels (43%), fishing vessels (15%), and non-commercial pleasure craft (13%).

One fatality was reported in MAIB contact incidents within UK waters between 2000 and 2019. Details of this fatal incident reported by the MAIB are presented in Table C.3.

Table C.3 Description of Fatal MAIB Collision Incidents (2000 to 2019)

Date	Description	Fatalities
June 2012	Contact between RIB and jetty. RIB badly damaged around the bow and fenders on the jetty also damaged. The RIB owner had consumed alcohol and suffered fatal injuries following the impact.	1

C.3 Fatality Risk

C.3.1 Incident Data

This section uses the MAIB incident data along with information on average manning levels per vessel type to estimate the probability of a fatality in a marine incident associated with the Proposed Development.

The wind farm structures are assessed to have the potential to affect the following incidents:

- Vessel to vessel collision;
- Powered vessel to structure allision;
- Drifting vessel to structure allision; and

- Fishing vessel to structure allision.

Of these incident types, only vessel to vessel collisions match the MAIB definition of collisions and hence the fatality analysis presented in section C.2.2 is considered to be directly applicable to these types of incidents.

The other scenarios of powered vessel to structure allision, drifting vessel to structure allision and fishing vessel to structure allision are technically contacts since they would involve a vessel striking an immobile object in the form of a wind turbine or offshore substation platform. From section C.2.3, it can be seen that only one of the 235 contact incidents reported by the MAIB between 2000 and 2019 resulted in a fatality, with the contact occurring with a jetty in the approaches to a harbour.

As the mechanics involved in a vessel contacting a wind turbine may differ in severity from hitting, for example, a buoy, quayside, or moored vessel, the MAIB collision fatality risk rate has also been conservatively applied for the allision incident types.

C.3.2 Fatality Probability

Six of the 481 collision incidents reported by the MAIB within UK waters between 2000 and 2019 resulted in one or more fatalities. This gives a 1.2% probability that a collision incident will lead to a fatal accident.

To assess the fatality risk for personnel on-board a vessel (crew, passenger or other) the number of persons involved in the incidents needs to be estimated. From analysis of the long-term AIS data, the average commercial passenger vessel had approximately 223 people on board (POB) (total of crew and passengers). For commercial cargo/freight vessels there was an average of 13 POB. For fishing vessels and recreational vessels, the average POB was 3.1 and 2.8, respectively, based on analysis of the MAIB incident data.

Table C.4 Estimated Average POB by Vessel Category

Vessel Category	Sub Categories	Source of Estimated Average POB	Estimated Average POB
Cargo/freight	Dry cargo, other commercial, service ship, etc.	MAIB incident data	15
Tanker	Tanker/combination carrier	MAIB incident data	22
Passenger	Roll-on/roll-off (Ro-Ro) passenger, cruise liner, etc.	Vessel traffic survey data/online information	1,530
Fishing	Trawler, potter, dredger, etc.	MAIB incident data	3.3
Recreational	Yacht, small commercial motor yacht, etc.	MAIB incident data	3.3

It is recognised that these numbers can be substantially higher or lower on an individual vessel basis depending upon the size, subtype, etc. but applying reasonable averages is considered sufficient for this analysis.

Using the average number of POB, along with the vessel type information involved in collision incidents reported by the MAIB (see Figure C.8), there were an estimated 10,533 POB the vessels involved in the collision incidents.

Based upon six fatalities, the overall fatality probability in a collision for any individual on board is approximately 5.7×10^{-4} (0.057%) per collision.

It is considered inappropriate to apply this rate uniformly as the statistics indicate that the fatality probability associated with smaller craft, such as fishing vessels and recreational vessels, is higher. Therefore, the fatality probability has been subdivided into five categories of vessel as presented in Table C.5.

Table C.5 Collision Incident Fatality Probability by Vessel Category (2000 to 2019)

Vessel Category	Sub Categories	Fatalities	People Involved	Fatality Probability
Commercial	Dry cargo, passenger, tanker, etc.	1	16,256	6.2×10^{-5}
Fishing	Trawler, potter, dredger, etc.	2	880	2.3×10^{-3}
Recreational	Yacht, small commercial motor yacht, etc.	3	713	4.2×10^{-3}

The risk is higher by up to two orders of magnitude for POB small craft compared to larger commercial vessels.

C.3.3 Fatality Risk due to the Proposed Development

The base case and future case annual collision and allision frequency levels pre and post wind farm for the Proposed Development array area are summarised in Table C.6, where change refers to the increase in collision and allision frequency due to the presence of the Proposed Development (overall 1.95×10^{-1} , equating to an additional collision or allision every 5.1 years) for the base case).

Table C.6 Summary of Annual Collision and Allision Risk Results

Risk	Scenario	Annual Frequency (Return Period)		
		Pre Wind Farm	Post Wind Farm	Change
Vessel to vessel collision	Base case	8.49×10^{-4} (1 in 1,178 years)	9.69×10^{-4} (1 in 1,031 years)	1.20×10^{-4} (1 in 8,310 years)
	Future case (10%)	1.06×10^{-3} (1 in 946 years)	1.21×10^{-3} (1 in 828 years)	1.50×10^{-4} (1 in 6,665 years)

Risk	Scenario	Annual Frequency (Return Period)		
		Pre Wind Farm	Post Wind Farm	Change
	Future case (20%)	8.49×10^{-4} (1 in 1,178 years)	9.69×10^{-4} (1 in 1,031 years)	1.20×10^{-4} (1 in 8,310 years)
Powered vessel to structure allision	Base case	1.06×10^{-3} (1 in 946 years)	1.21×10^{-3} (1 in 828 years)	1.50×10^{-4} (1 in 6,665 years)
	Future case (10%)	1.26×10^{-3} (1 in 791 years)	1.44×10^{-3} (1 in 694 years)	1.75×10^{-4} (1 in 5,724 years)
	Future case (20%)	N/A	1.52×10^{-4} (1 in 6,581 years)	1.52×10^{-4} (1 in 6,581 years)
Drifting vessel to structure allision	Base case	N/A	1.69×10^{-4} (1 in 5,900 years)	1.69×10^{-4} (1 in 5,900 years)
	Future case (10%)	N/A	1.85×10^{-4} (1 in 5,407 years)	1.85×10^{-4} (1 in 5,407 years)
	Future case (20%)	N/A	7.69×10^{-5} (1 in 12,999 years)	7.69×10^{-5} (1 in 12,999 years)
Fishing vessel to structure allision	Base case	N/A	8.58×10^{-5} (1 in 11,649 years)	8.58×10^{-5} (1 in 11,649 years)
	Future case (10%)	N/A	9.36×10^{-5} (1 in 10,689 years)	9.36×10^{-5} (1 in 10,689 years)
	Future case (20%)	N/A	2.29×10^{-1} (1 in 4.4 years)	2.29×10^{-1} (1 in 4.4 years)
Total	Base case	N/A	2.52×10^{-1} (1 in 4.0 years)	2.52×10^{-1} (1 in 4.0 years)
	Future case (10%)	N/A	2.75×10^{-1} (1 in 3.6 years)	2.75×10^{-1} (1 in 3.6 years)
	Future case (20%)	8.49×10^{-4} (1 in 1,178 years)	2.30×10^{-1} (1 in 4.3 years)	2.29×10^{-1} (1 in 4.4 years)

From the detailed results of the collision and allision risk modelling, the distribution of the predicted change in annual collision and allision frequency by vessel type due to the Proposed Development for the base case and future cases are presented in Figure C.13.

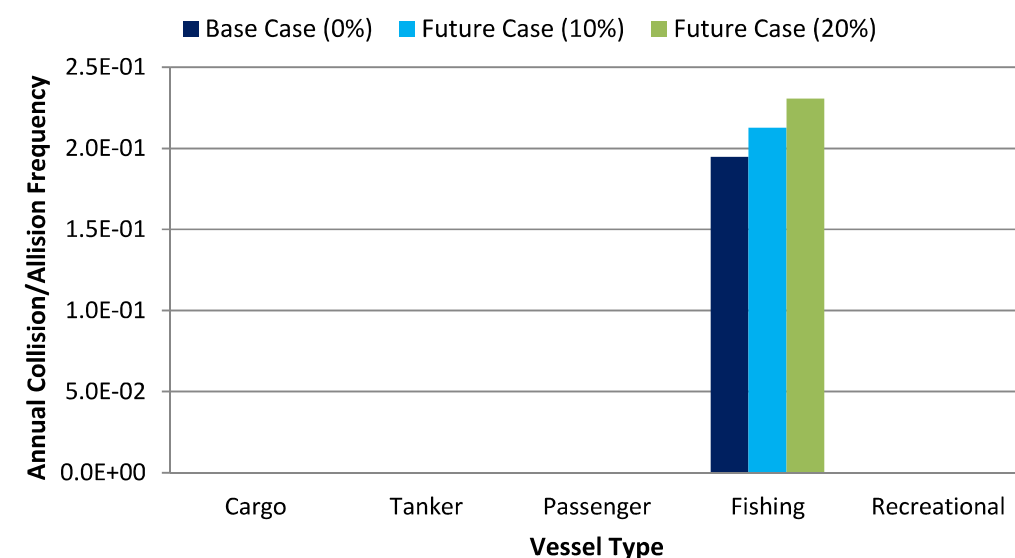


Figure C.13 Change in Annual Collision and Allision Frequency by Vessel Type

It can be seen that the change in collision and allision frequency is dominated by fishing vessels, owing to the greater duration spent in proximity to Proposed Development array area by fishing vessels engaged in fishing activities and the possibility of fishing occurring internally within the array itself. The second greatest change in collision and allision frequency was associated with cargo vessels, with the other categories significantly lower.

Combining the annual collision and allision frequency, estimated number of POB for each vessel type, and estimated fatality probability for each vessel category, the annual increase in PLL due to the presence of the Proposed Development for the base case is estimated to be 1.31×10^{-3} , equating to one additional fatality every 764 years.

The estimated incremental increases in PLL due to the Proposed Development, distributed by vessel type for the base and future cases, are presented in Figure C.14.

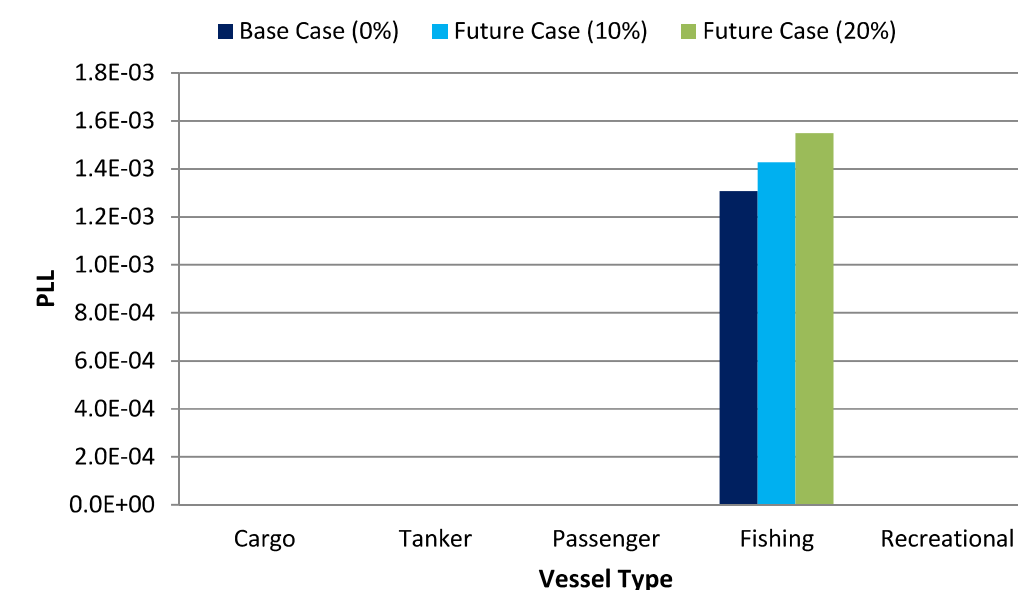


Figure C.14 Estimated Change in Annual PLL by Vessel Type

As with the change in annual collision and allision frequency, it can be seen that the change in annual PLL is dominated by fishing vessels, which historically have a higher fatality probability than commercial vessels.

Converting the PLL to individual risk based upon the average number of people exposed by vessel type, the results are presented in Figure C.15.

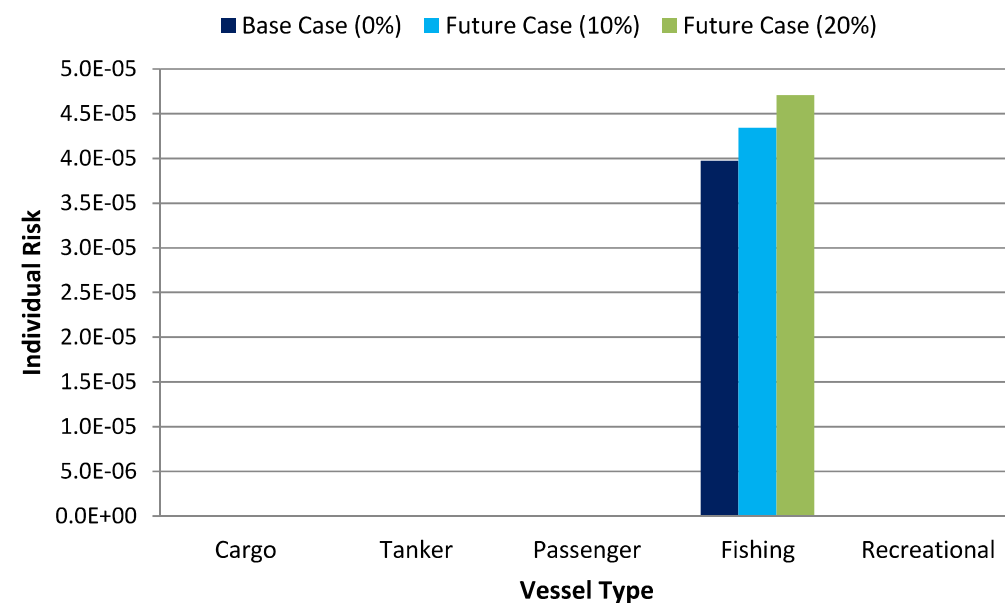


Figure C.15 Estimated Change in Individual Risk by Vessel Type

It can be seen that the individual risk is highest for people on fishing vessels, which reflects the higher probability of a fatality occurring in the event of an incident involving a fishing vessel.

C.3.4 Significance of Increase in Fatality Risk

In comparison to MAIB statistics, which indicate an average of 20 fatalities per year in UK territorial waters, the overall increase for the base case in PLL of one additional fatality per 764 years represents a small change.

In terms of individual risk to people, the change for commercial vessels attributed to the Proposed Development (approximately 2.89×10^{-9} for the base case) is very low compared to the background risk level for the UK sea transport industry of 2.9×10^{-4} per year.

For fishing vessels, the change in individual risk attributed to the Proposed Development (approximately 3.98×10^{-5} for the base case) is low compared to the background risk level for the UK sea fishing industry of 1.2×10^{-3} per year.

C.4 Pollution Risk

C.4.1 Historical Analysis

The pollution consequences of a collision in terms of oil spill depend upon the following criteria:

- Spill probability (i.e., the likelihood of outflow following an incident); and

- Spill size (quantity of oil).

Two types of oil spill are considered within this assessment:

- Fuel oil spills from bunkers (all vessel types); and
- Cargo oil spills (laden tankers).

Research undertaken as part of the UK's DfT MEHRAs project (DfT, 2001) has been used as it was comprehensive and based upon worldwide marine oil spill data analysis. From this research, the overall probability of a spill incident per accident was calculated based upon historical accident data for each accident type as presented in Figure C.16.

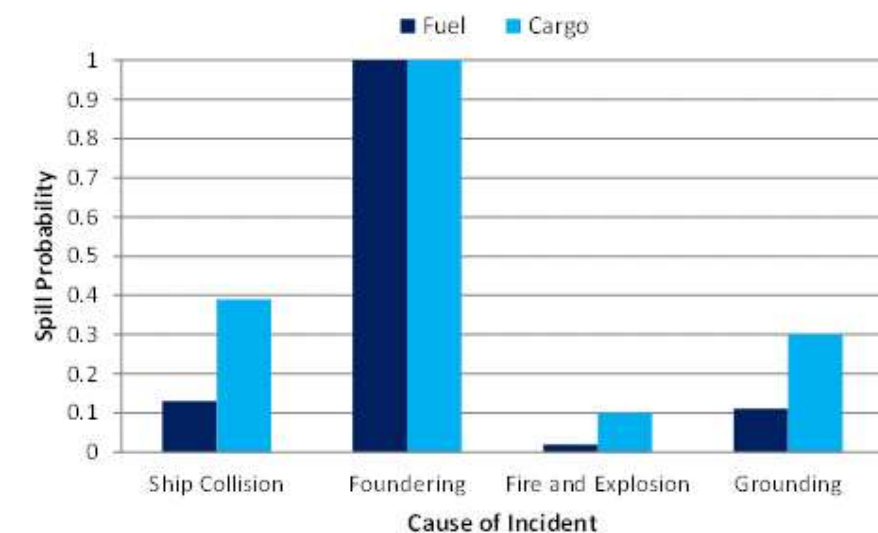


Figure C.16 Probability of an Oil Spill resulting from an Incident

Therefore, it was estimated that 13% of vessel collisions result in a fuel oil spill and 39% of collisions involving a laden tanker result in a cargo oil spill.

In the event of a bunker spill, the potential outflow of oil depends upon the bunker capacity of the vessel. Historical bunker spills from vessels have generally been limited to a size below 50% of bunker capacity, and in most incidents much lower.

For the types and sizes of vessels exposed to the Proposed Development, an average spill size of 100 tonnes of fuel oil is considered to be a conservative assumption.

For oil spills from laden tankers, the spill size can vary significantly. The International Tanker Owners Pollution Federation (ITOPF) reported the following spill size distribution for tanker collisions between 1974 and 2004:

- 31% of spills below seven tonnes;
- 52% of spills between seven and 700 tonnes; and
- 17% of spills greater than 700 tonnes.

Based upon this data and the tankers transiting in proximity to the Proposed Development array area, an average spill size of 400 tonnes is considered conservative.

For fishing vessel collisions comprehensive statistical data is not available. Consequently, it is conservatively assumed that 50% of all collisions involving fishing vessels will lead to oil spill with the quantity spilled being on average five tonnes. Similarly, for recreational vessels, owing to a lack of data 50% of collisions are assumed to lead to a spill with an average size of one tonne.

C.4.2 Pollution Risk due to the Proposed Development

Applying the above probabilities to the annual collision and allision frequency by vessel type and the average spill size per vessel, the estimated amount of oil spilled per year due to the presence of the Proposed Development would equate to 0.51 tonnes of oil per year for the base case. For the future case scenarios, this estimate increases to 0.56 tonnes and 0.61 tonnes for traffic increases of 10% and 20%, respectively.

The estimated increase in tonnes of oil spilled, distributed by vessel type, for the base and future cases are presented in Figure C.17.

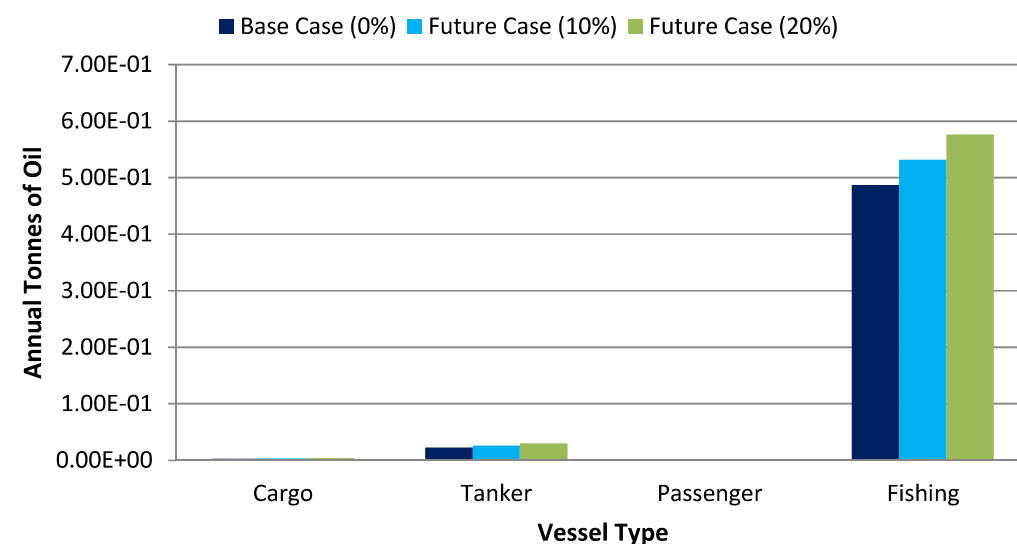


Figure C.17 Estimated Change in Pollution by Vessel Type

The annual oil spill results are dominated by fishing vessels due to the high annual collision frequency associated with fishing vessels. Tankers also contribute significantly to the annual oil spill estimate, which reflects the greater spillage size anticipated in incidents involving tankers.

C.4.3 Significance of Increase in Pollution Risk

To assess the significance of the increased pollution risk from vessels caused by the Proposed Development, historical oil spill data for the UK has been used as a benchmark.

From the MEHRAs research, the annual average tonnes of oil spilled in UK waters due to maritime incidents in the 10-year period from 1989 to 1998 was 16,111 tonnes. This is based upon a total of 146 reported oil pollution incidents of greater than one tonne (smaller spills are excluded as are incidents which occurred within port or harbour areas or as a result of operational errors or equipment failure). Commercial vessel spills accounted for approximately 99% of the total while fishing vessel incidents accounted for less than 1%.

The overall increase in pollution estimated due to the Proposed Development of 0.51 tonnes for the base case represents a 0.003% increase compared to the historical average pollution quantities from marine incidents in UK waters.

C.5 Conclusion

This appendix has quantitatively assessed the fatality and pollution risk associated with the Proposed Development in the case of a collision or allision incident occurring. It is concluded, based upon the results, that the collision and allision risk of the Proposed Development on people and the environments is very low compared to the existing background risk levels.

Appendix D Regular Operator Consultation

As part of the consultation process for the Project, Regular Operators identified (from the vessel traffic surveys and long-term vessel traffic data) that would be required to deviate their routes due to the presence of the Proposed Development array area were consulted via email. An example of the correspondence sent to the Regular Operators (which shows the extent of the Proposed Development array area and export cable corridor at that time) is presented below.



Anatec Ltd.
Cain House
10 Exchange Street
Aberdeen AB11 6PH
Tel: 01224 253700
Email: aberdeen@anatec.com
Web: www.anatec.com

Date: 7th September 2021

Stakeholder Consultation on Impacts Relating to Shipping and Navigation for the Proposed Berwick Bank Wind Farm

Dear Stakeholder,

As you may be aware, SSE Renewables is the developer of the Seagreen and the Berwick Bank Wind Farm located off the Firth of Forth and Firth of Tay. Seagreen is currently in the pre-construction phase having been approved for consent in October 2014 and had an application for an updated project design approved in August 2018. Offshore construction is expected to commence in the coming months.

Following a Scoping Report submitted to Marine Scotland in August 2020, Berwick Bank Wind Farm has been merged with the proposed Marr Bank Wind Farm development with the two being progressed as a single development under the name Berwick Bank Wind Farm. An updated Scoping Report reflecting this will be submitted to Marine Scotland in October 2021 with a consent application planned in May 2022. Berwick Bank Wind Farm will consist of offshore wind turbines and associated infrastructure located in a defined area to the south of Seagreen, as well as export cables to shore, associated infrastructure, and an onshore grid connection.

The Proposed Development array area is located approximately 30nm (56km) east of the entrance to the Firth of Forth and covers an area of 383nm² (1,314km²). In addition to Seagreen, other offshore wind farms in the area include the Neart na Gaoithe Offshore Wind Farm (under construction) and the Inch Cape Offshore Wind Farm (consented), both located west of Berwick Bank Wind Farm (Figure 1.1).

The location of the Proposed Development, including the array area and export cable corridor, alongside other offshore wind farms in the Firth of Forth and Firth of Tay is presented in Figure 1.1.

Further information relating to Berwick Bank Wind Farm is available [here](#).

Page 1

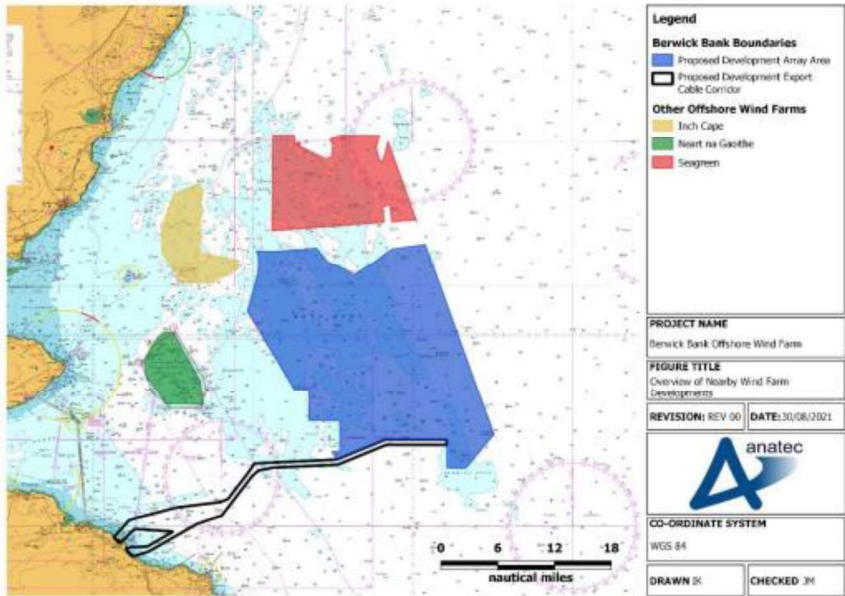


Figure 1.1 Location of the Proposed Development in relation to other Wind Farm Developments in the Firth of Forth and Tay region

Anatec has been contracted by SSE Renewables to provide technical support on shipping and navigation during the consent process, and to co-ordinate consultation with stakeholders. Therefore, we are writing to you on behalf of SSE Renewables to inform you of our relationship with the Berwick Bank Wind Farm and to kindly request your comments, which will help inform the proposed development.

As part of the Environmental Impact Assessment (EIA) Report process associated with the project, SSE Renewables are keen to ensure that comprehensive consultation is undertaken and to identify any potential impacts that the Berwick Bank Wind Farm may have upon shipping and navigation. In order to analyse shipping movements within, and in the vicinity of, the Proposed Development array area, Automatic Identification System (AIS), Radar data, and visual observations obtained from vessel-based surveys in 2020 and 2021 has been collected and assessed and will feed into the Navigational Risk Assessment (NRA) required by the Maritime and Coastguard Agency (MCA). Additionally, a 12-month AIS dataset covering 2019 has been considered to ensure seasonal variation and any effects due to COVID-19 are considered.

According to the assessment of the available datasets, your company's vessel(s) regularly navigates within, and/or in the vicinity of, the Proposed Development array area. Consequently, your company has been identified as a potential marine stakeholder for the proposed Berwick Bank Wind Farm development. We therefore invite your feedback on the potential development including any impact it may have upon the navigation of vessels.

We would be grateful if you could provide us with any comments or feedback that you may have by Friday 1st October 2021. This will allow us to assess your feedback as part of the NRA which is currently being undertaken. We would also be grateful if you could forward a copy of this information to any vessel operators/owners you feel may be interested in commenting.

In particular, we are keen to receive comments of the following:

1. Whether the proposal to construct the Berwick Bank Wind Farm is likely to impact the routing of any specific vessels, including the nature of any change in regular passage;
2. Whether any aspect of the Berwick Bank Wind Farm poses any safety concerns to your vessels, including any adverse weather routing;
3. Whether your responses to questions 1 and 2 above change when considering the cumulative scenario with the other Firth of Forth and Tay developments;
4. Whether you would choose to make passage internally through the array;
5. Whether you wish to be retained on our list of marine stakeholders and consulted throughout the NRA process; and
6. Whether you wish to attend a Hazard Workshop being held virtually (over Microsoft Teams) on 28th or 29th September 2021, where impacts relating to shipping and navigation will be discussed.

Responses should be sent via email to [REDACTED]. Should you have any queries about the published information or require any further information to support your review, please do not hesitate to contact us. We are also happy to organise a dedicated virtual meeting to provide further details if you feel this would be helpful.

Yours sincerely,

[REDACTED]

Anatec Ltd.

Appendix E Long-Term Vessel Traffic Movements

E.1 Introduction

This annex assesses additional long-term vessel traffic data for the Proposed Development. As required under MGN 654 (MCA, 2021), the NRA and **volume 2, chapter 13** consider 28 days of AIS, radar and visual observation data as the primary vessel traffic data source. However, it should be considered that studying a 28-day period in isolation may exclude certain activities or periods of pertinence to shipping and navigation. Therefore, in line with good practice assessment procedures, this NRA has also considered a longer-term dataset covering all of 2019 to ensure a comprehensive characterisation of vessel traffic movements can be established, including the capture of any season variation.

This approach (i.e., the use of both short- and long-term data) has been agreed with the MCA, NLB and Forth Ports.

E.1.1 Aims and Objectives

The key aims and objectives of this appendix are as follows:

- Identify seasonal variations in vessel traffic via assessment of the long-term vessel traffic data;
- Determine which variations are not reflected within the short-term vessel traffic survey data (and therefore should be fed into the NRA baseline);
- Assess which dataset (long-term, survey, or a combination of both) should be utilised for each key NRA element that requires vessel traffic data input; and
- Identify and account for any potential effects of the COVID-19 pandemic situation on the winter 2021 vessel traffic survey data (acknowledging the data limitation outlined in section 5.2).

E.1.2 COVID-19 Pandemic Situation

It is noted that while the primary purpose of the long-term dataset is to ensure a comprehensive baseline can be established by ensuring seasonal variations are captured, in the case of the Proposed Development, the consideration of long-term vessel traffic data also ensures that any tangible effects of the COVID-19 pandemic situation on the short-term vessel traffic survey data can be identified, noting that the winter and summer surveys were undertaken in January 2021 and August 2022, respectively, and as such some associated impact upon shipping levels or patterns may be present within the 2021 data (but is not considered relevant for the 2022 data).

As per section 5.2 the MCA, NLB and Forth Ports were content with the vessel traffic surveys on the assumption that additional long-term vessel traffic data prior to the COVID-19 pandemic was considered in tandem with appropriate consultation with the relevant stakeholders. The summer 2022 vessel traffic data has been collected since this consultation and ensures that the effects of COVID-19 pandemic on the baseline characterisation are further negated.

E.2 Methodology

E.2.1 Study Area

This appendix has assessed the long-term vessel traffic data within the Proposed Development array area shipping and navigation study area introduced in section 5 (i.e. a 10 nm buffer around the Proposed Development array area).

E.2.2 Data Period and Temporary Vessel Traffic

The long-term vessel traffic data was collected from coastal receivers for the entirety of 2019 (i.e., 1 January to 31 December 2019). Any traffic deemed to be temporary and/or non-routine in nature (e.g., on survey, guarding or involved in mobile drilling operations) has been excluded).

Notable levels of wind farm and survey traffic were recorded associated with the Proposed Development and Seagreen to the north, as well as at the nearby NnG and Inch Cape offshore wind farms nearer shore. As these offshore wind farms are not yet operational, this traffic has been excluded as temporary on the basis that 2019 movements may not accurately reflect that of future traffic. Vessels transiting to other offshore wind farms outside the Proposed Development array area shipping and navigation study area were retained. Temporary traffic that has been filtered out of the rest of the analysis is presented below in Figure E.1.

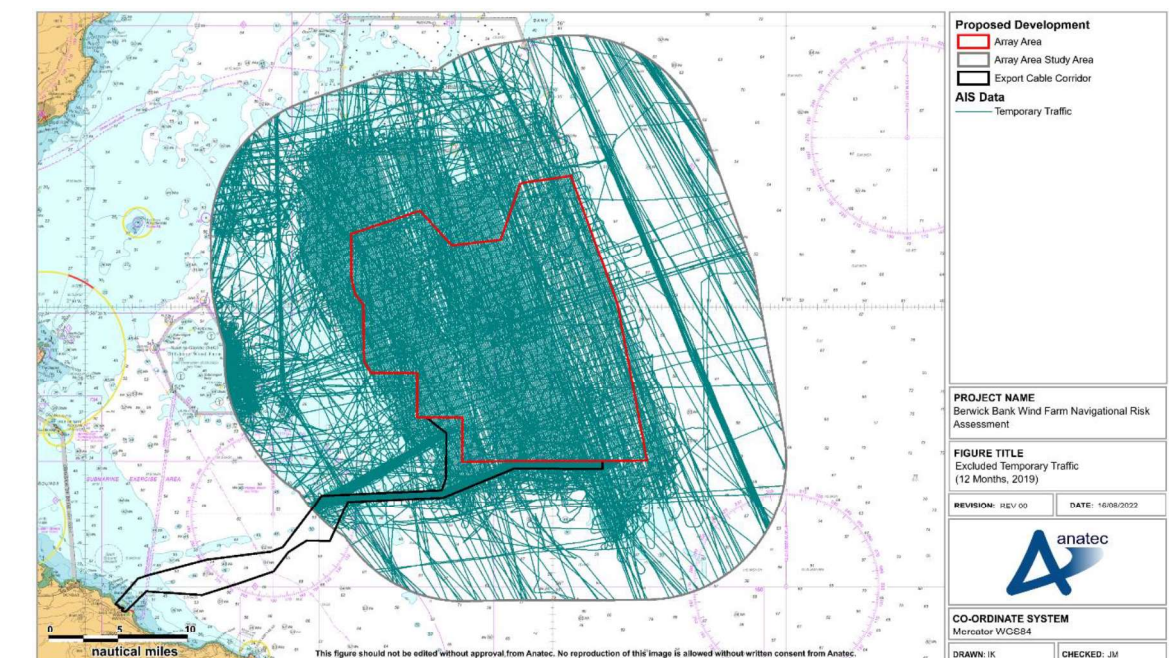


Figure E.1 Long-Term AIS Data – Excluded Temporary Traffic (12 Months, 2019)

Data coverage was observed to be good, however it should be considered that approximately 7% of downtime was observed throughout the entirety of 2019.

E.2.3 AIS Carriage

General limitations associated with the use of AIS data (for example, carriage requirements) are discussed within section 13.8.2.

E.3 Long-Term Vessel Traffic Movements

A plot of the vessel tracks recorded within the Proposed Development array area shipping and navigation study area during the data period, colour-coded by vessel type and excluding temporary traffic, is presented in Figure E.2. The vessel density within the Proposed Development array area shipping and navigation study area is then presented in Figure E.3.

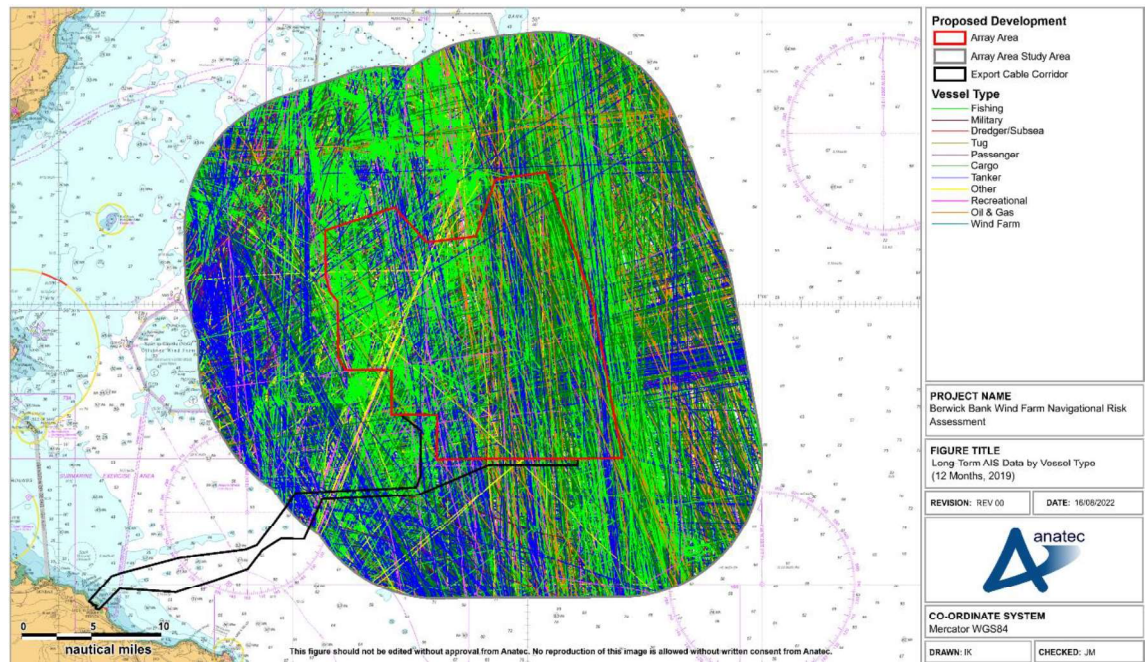


Figure E.2 Long-Term AIS Data by Vessel Type (12 Months, 2019)

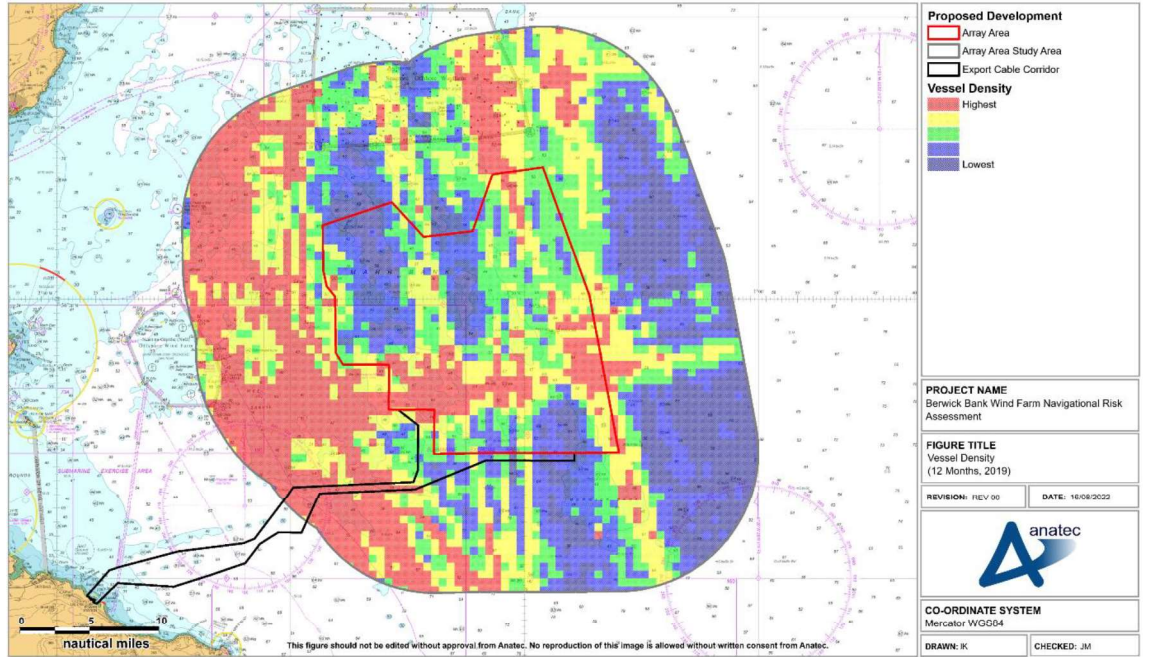


Figure E.3 Vessel Density Heat Map (12 Months, 2019)

E.3.1 Vessel Count

The average daily number of vessels within the Proposed Development array area and the shipping and navigation study area are presented in Figure E.4. The downtime in each given month was accounted for when calculating the average daily vessels.

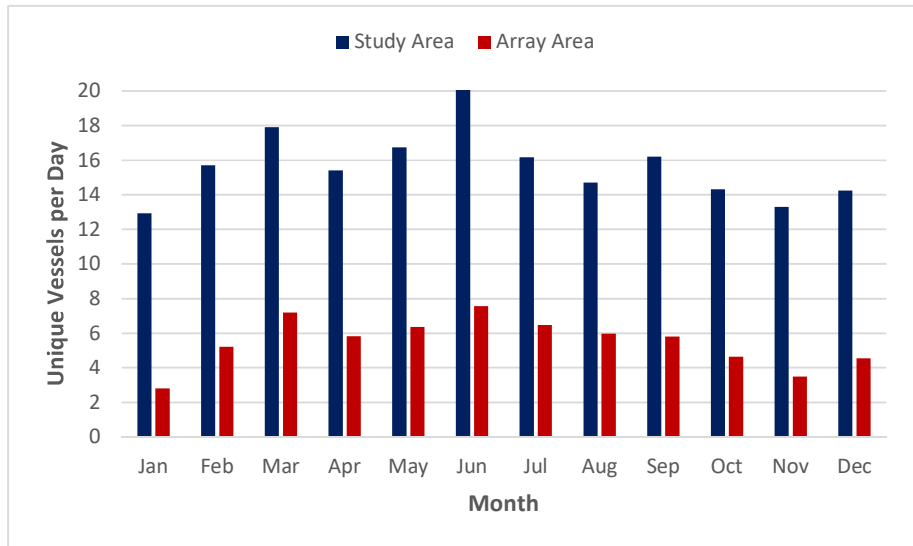


Figure E.4 Long-Term Daily Vessel Counts by Month within Proposed Development Array Area and Shipping and Navigation Study Area

The busiest month recorded within the Proposed Development array area shipping and navigation study area was June with 20 unique vessels recorded per day, while the quietest month was January with approximately 13 vessels per day (factored for downtime).

E.3.2 Vessel Type

The distribution of the main vessel types recorded during the data period are presented in Figure E.5.

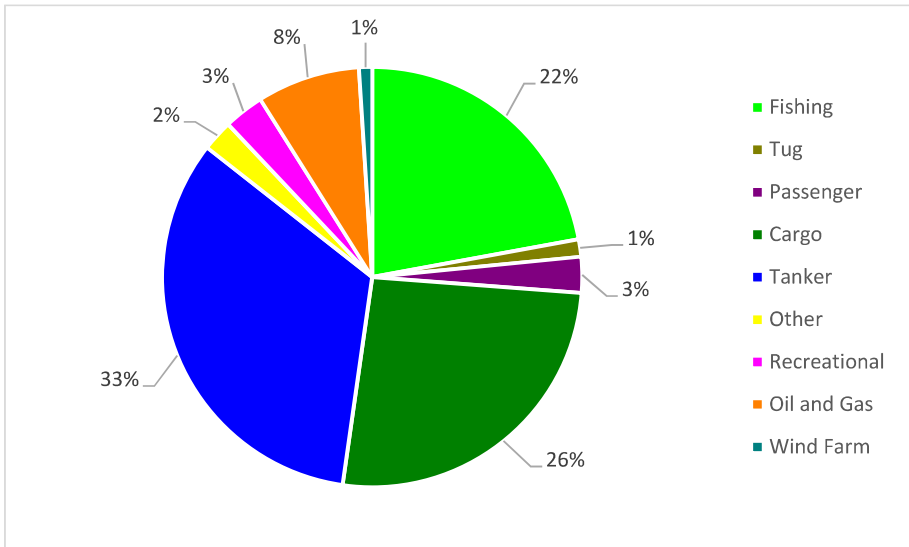


Figure E.5 Main Vessel Type Distribution (12 Months, 2019)

The most common vessel type recorded was tankers, accounting for approximately 33% of all traffic recorded. Other common vessel types included cargo vessels (26%) and commercial fishing vessels (22%).

E.3.3 Commercial Vessels

Figure E.6 presents the commercial vessels recorded within the Proposed Development array area study area during the study period, colour-coded by vessel type.

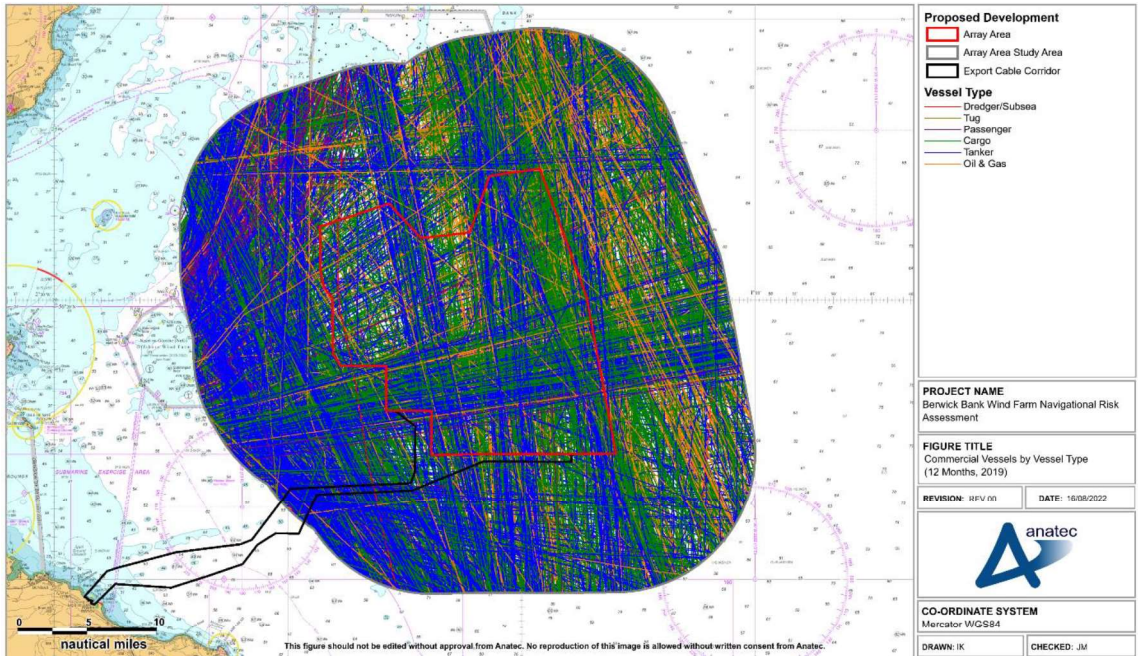


Figure E.6 Commercial Vessels by Type (12 Months, 2019)

A high density of commercial traffic was noted, as it accounts for over half of the total vessel activity within the Proposed Development array area shipping and navigation study area. The majority of the commercial traffic is on well-defined routes. Routeing was predominantly in a north-south direction or out of the Firth of Forth.

Figure E.7 presents the average number of unique commercial vessels for each vessel type detected per month within the Proposed Development array area shipping and navigation study area during the study period factored to account for downtime.

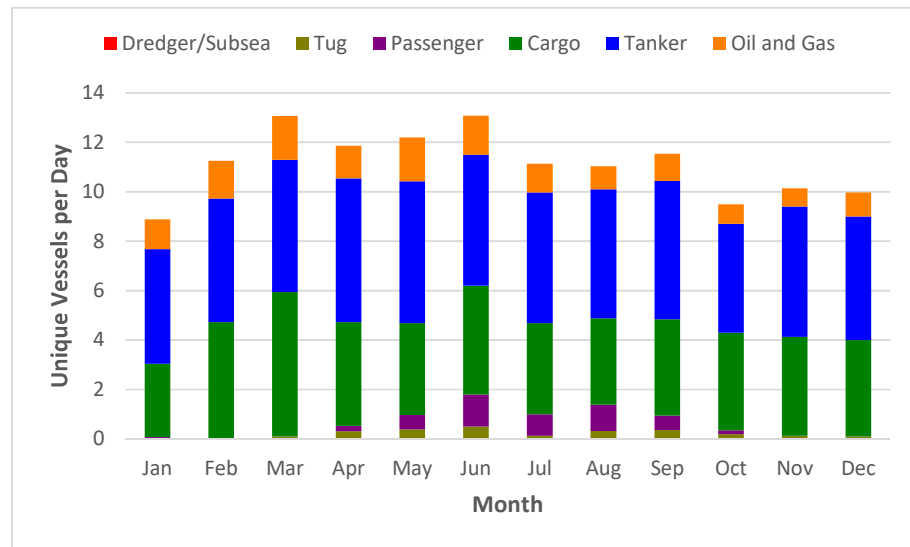


Figure E.7 Average Number of Daily Commercial Vessels per Month within the Proposed Development Array Area Shipping and Navigation Study Area

Passenger vessels highlighted the seasonal variation within the Proposed Development array area shipping and navigation study area, as higher counts were recorded between May and September.

Cargo vessels showed minimal seasonal variation. The busiest month for cargo vessels was March with 181 recorded, while the quietest was January with approximately 92 cargo vessels recorded (factored for downtime).

Tankers similarly showed minimal seasonal variation. The busiest months for tankers were, factoring for downtime, March and May, with 166 vessels recorded during March (in which there was no downtime recorded) and a projected vessel count of 178 vessels was estimated for May based on downtime.

Table E.1 presents a summary of the average number of vessels within the Proposed Development array area shipping and navigation study area during the busiest month, quietest month, and the average throughout the full data period.

Table E.1 Quietest, Busiest and Average Daily Unique Vessel Counts for Commercial Vessels (2019)

Vessel Type	Quietest Month (Unique vessels per day)	Busiest Month (Unique vessels per day)	Average (Unique vessels per day)
Tankers	4-5	5-6	5
Cargo vessels	3	5-6	4
Oil and gas vessels	0-1	1-2	1

Vessel Type	Quietest Month (Unique vessels per day)	Busiest Month (Unique vessels per day)	Average (Unique vessels per day)
Passenger vessels	0	1-2	0-1
Marine aggregate dredgers	0	0	0-1
Tugs	0	0	0

In summary, the most common type of commercial vessel recorded within the Proposed Development array area study area was tankers. Cargo vessels and tankers showed little seasonal variation while passenger vessel activity was greater in the summer months.

E.3.4 Passenger Vessels

Figure E.8 presents in isolation the passenger vessels recorded within the Proposed Development array area shipping and navigation study area during the study period.

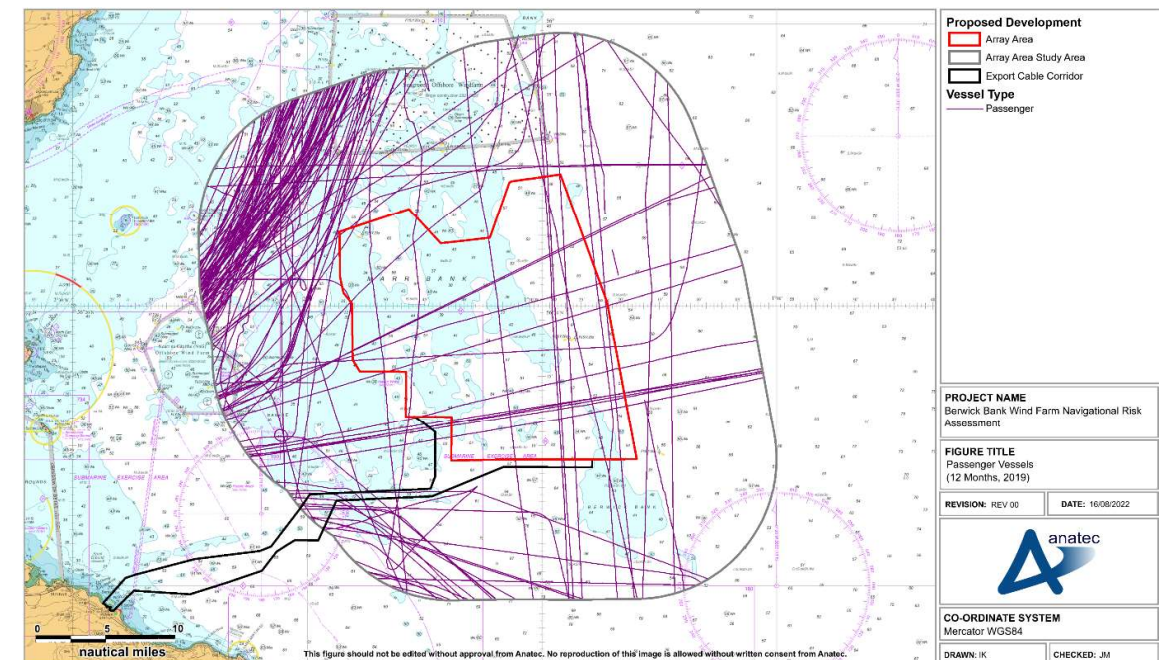


Figure E.8 Passenger Vessels (12 Months, 2019)

Passenger vessel traffic was not captured during the winter 2021 survey period (but was during the summer 2022 survey period). This may be attributed to the seasonal variation of traffic (see Figure E.7), or the effects of the COVID-19 pandemic.

E.3.5 Oil and Gas Vessels

Figure E.9 presents the oil and gas vessels recorded on AIS within the Proposed Development array area shipping and navigation study area during the study period.

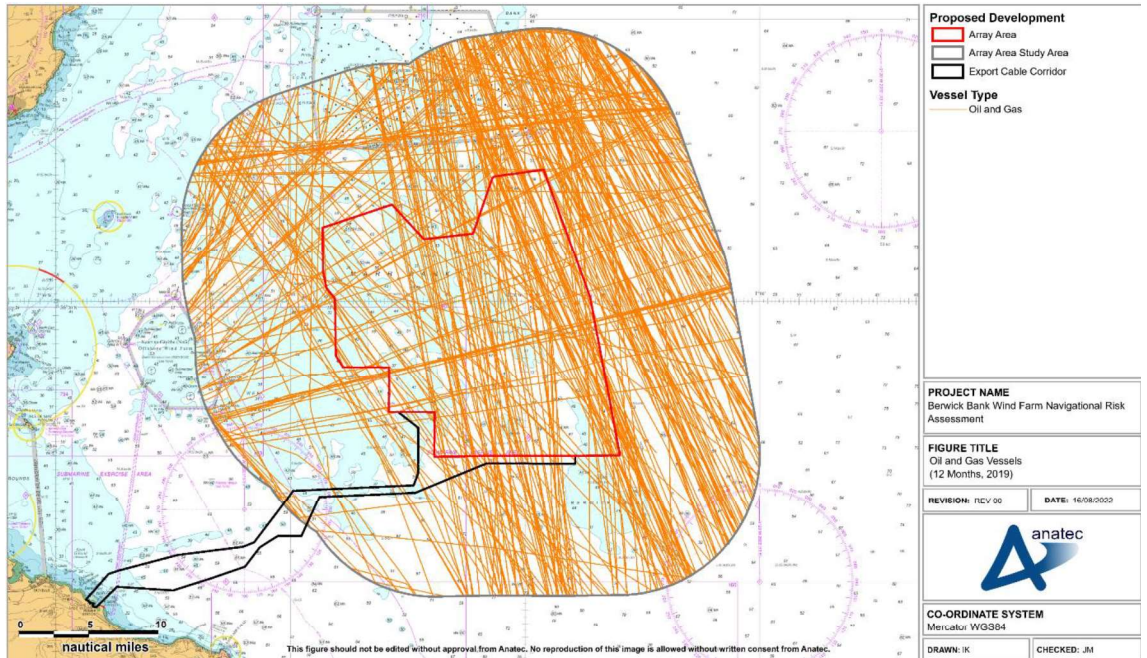


Figure E.9 Oil and Gas Support Vessels (12 Months, 2019)

Oil and gas support vessels were typically observed on transit, utilising a number of routes similar to that of commercial vessels (see Figure E.6). No oil and gas infrastructure is situated within the Proposed Development array area shipping and navigation study area.

A breakdown of the average number of daily unique oil and gas support vessels within the Proposed Development array area shipping and navigation study area per month is presented in Figure E.10.

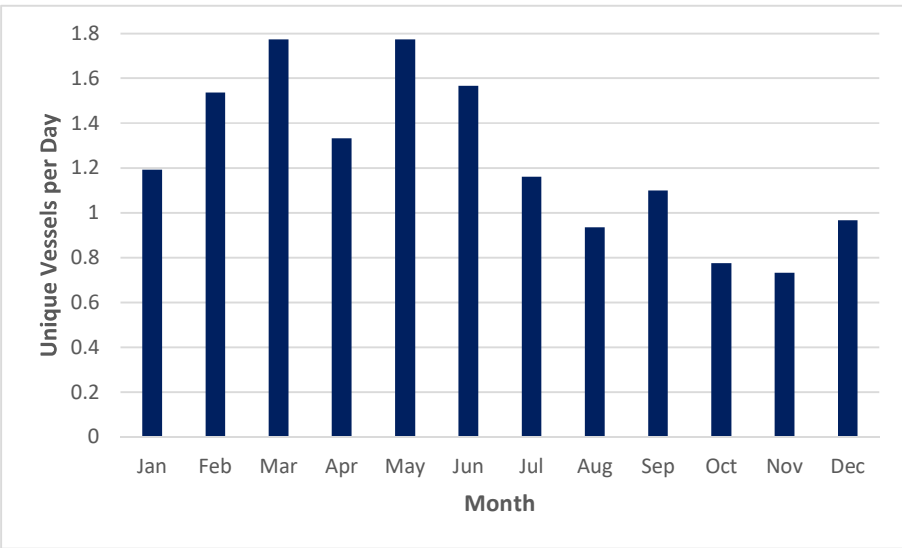


Figure E.10 Average Daily Unique Oil and Gas Vessel Count per Month within the Proposed Development Array Area Shipping and Navigation Study Area

Within the Proposed Development array area shipping and navigation study area, an average of approximately one unique oil and gas vessel was recorded per day.

The busiest month for oil and gas vessels throughout the study period within the Proposed Development array area shipping and navigation study area were March and May with 55 vessels recorded each, while the quietest month was November with 22 recorded. On average, 38 oil and gas vessels were recorded each month (factoring for downtime).

During the long-term study period, one instance of an offshore installation passing in proximity to the Proposed Development array area was recorded. An FPSO was recorded being towed by two tugs (supported by two other vessels) east-west into Dundee, passing the Proposed Development array area at a minimum distance of approximately 1.8 nm. This activity is presented in Figure E.11.

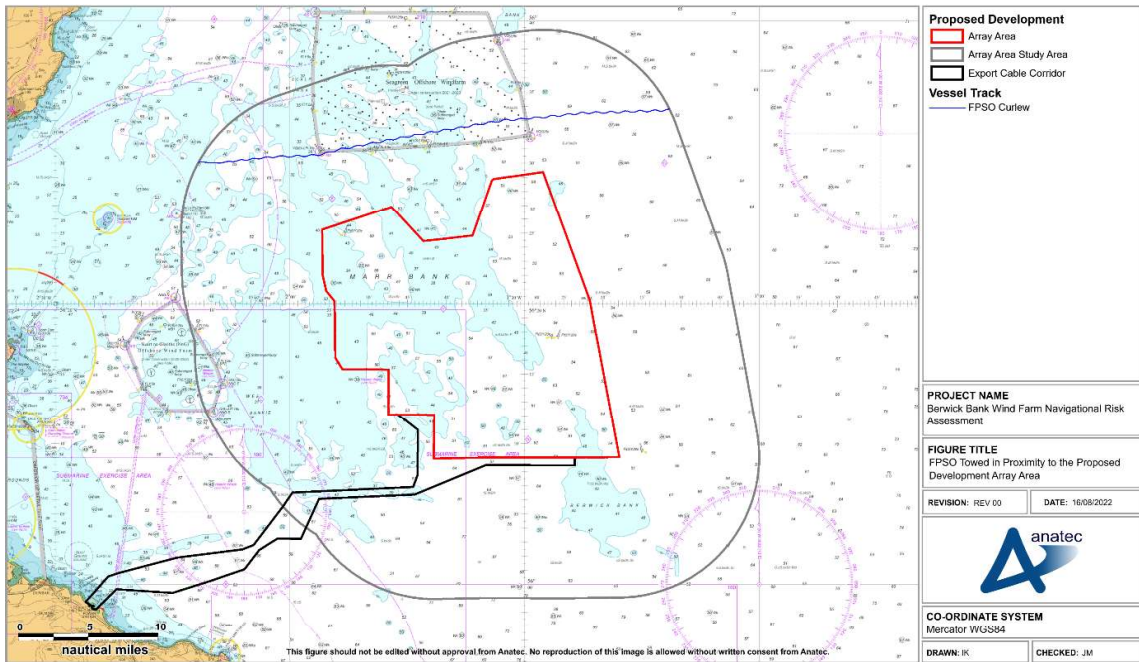


Figure E.11 FPSO Towed in proximity to the Proposed Development Array Area

E.3.6 Commercial Fishing Vessels

Figure E.12 presents the commercial fishing vessels recorded via AIS within the Proposed Development array area shipping and navigation study area during the study period colour-coded by activity. Based on the vessel speed, destination and navigational status broadcast, commercial fishing vessels were categorised as either on transit or actively fishing. It is noted that a proportion of commercial fishing vessels were recorded on transit before and after being identified as actively fishing.

Commercial fishing vessels were typically in transit to the eastern portion of the Proposed Development array area shipping and navigation study area while vessels were recorded actively fishing to the western portion of the Proposed Development array area shipping and navigation study area. It should be considered that as this assessment is AIS only; it is likely that commercial fishing vessel activity is underrepresented (see section 10.1.2.3).

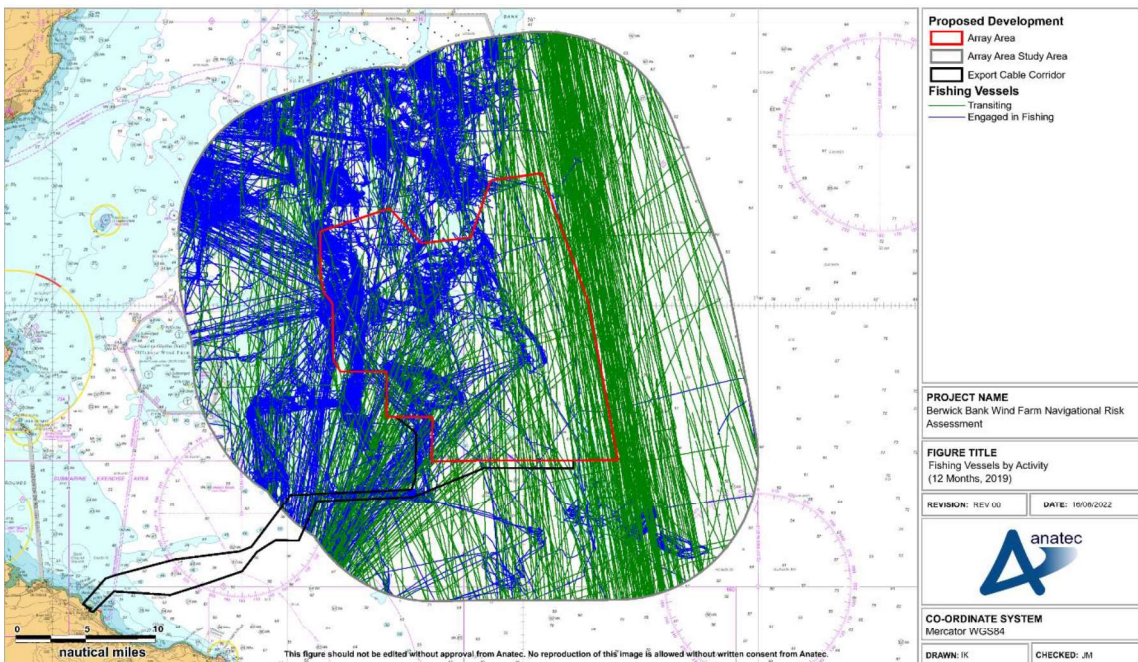


Figure E.12 Commercial Fishing Vessels by Activity (2019)

During the study period, 47% of commercial fishing vessels were estimated to be actively engaged in fishing activities within the Proposed Development array area shipping and navigation study area. The majority of these vessels were observed to be in the western half of the Proposed Development array area shipping and navigation study area. The average daily number of commercial fishing vessels recorded per day per month is summarised in Figure E.13.

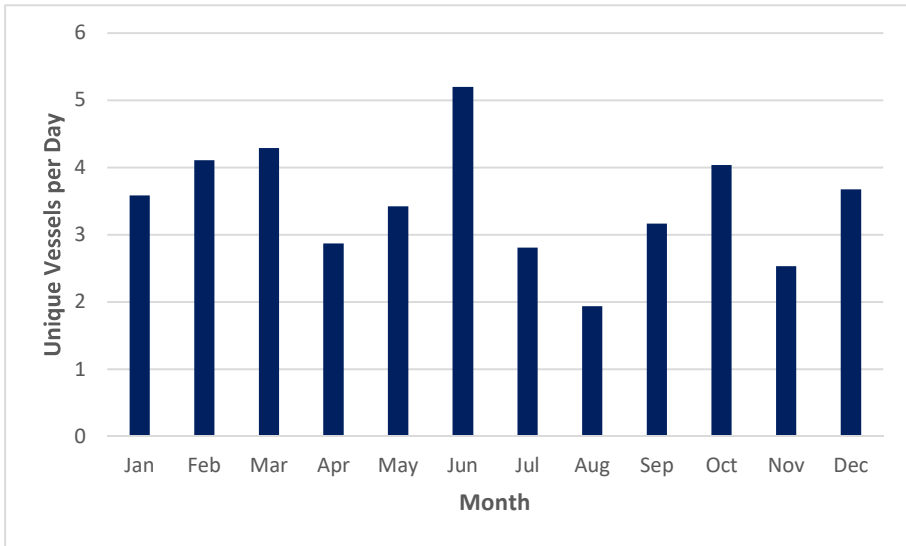


Figure E.13 Average Daily Commercial Fishing Vessel Count per Month within the Proposed Development Array Area Shipping and Navigation Study Area

The busiest month for fishing vessels within the Proposed Development array area shipping and navigation study area was June, with approximately 156 commercial fishing vessels recorded. The quietest month for commercial fishing vessels (factoring for downtime) was August, with 60 recorded. On average, 105 commercial fishing vessels per month were recorded within the Proposed Development array area shipping and navigation study area.

E.3.7 Recreational Vessels

Figure E.14 presents the recreational vessels recorded within the Proposed Development array area shipping and navigation study area during the study period.

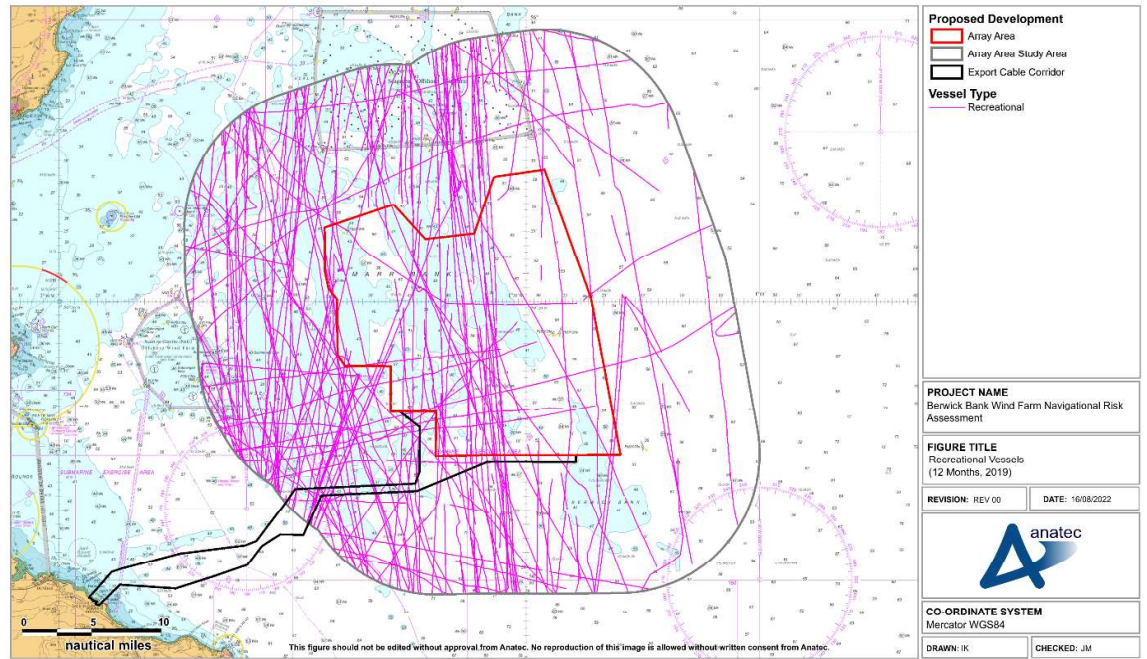


Figure E.14 Recreational Vessels (12 Months, 2019)

Recreational vessel activity was typically observed within the western portion of the Proposed Development array area shipping and navigation study area (i.e., closer to shore), with the majority of recreational activity recorded transiting in a north-south direction.

The distribution of daily unique recreational vessels recorded per month within the Proposed Development array area study area is presented in Figure E.15.

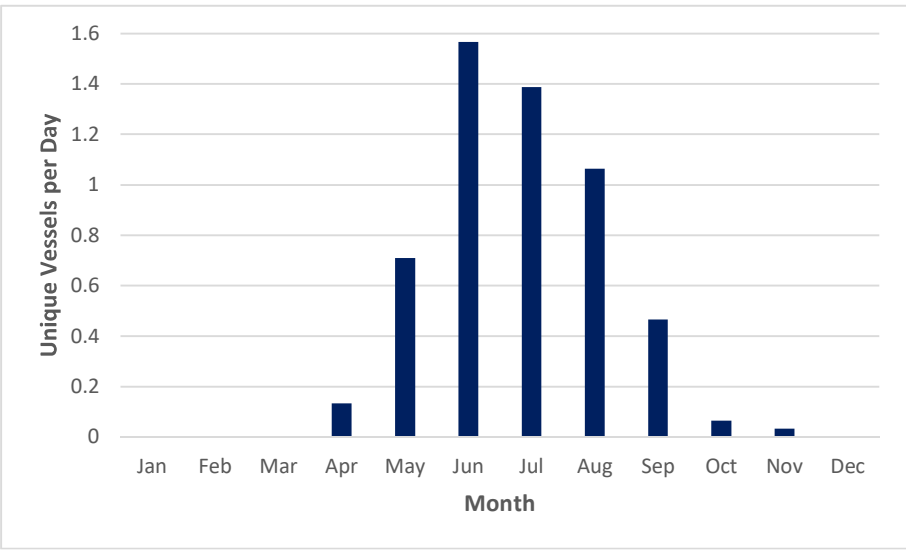


Figure E.15 Average Daily Unique Recreational Vessel Count per Month within the Proposed Development Array Area Shipping and Navigation Study Area

An average of approximately one recreational vessel every two days was recorded within the Proposed Development array area shipping and navigation study area. The seasonal variation in vessel numbers can be clearly seen, with limited numbers of recreational vessels recorded in the winter months and the vast majority of activity recorded during the summer months.

The busiest month for recreational vessels within the Proposed Development array area shipping and navigation study area was June, with 47 vessels recorded, while the quietest months were January, February, March, and December in which no vessels were recorded (although it is noted that significant downtime occurred during January 2019).

E.4 Site Specific Analysis

The vessel tracks intersecting the Proposed Development array area during the study period are presented in Figure E.16.

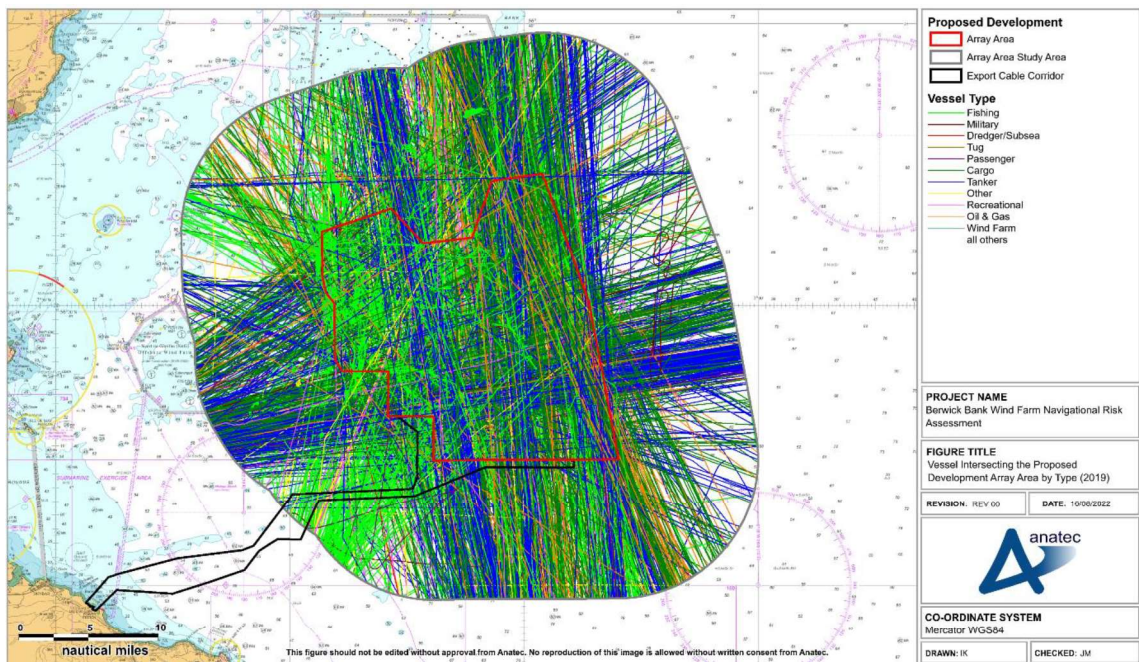


Figure E.16 Vessels intersecting the Proposed Development Array Area by Vessel Type (12 Months, 2019)

On average, five to six unique vessels per day were recorded intersecting the Proposed Development array area during 2019. The busiest day was the 30th of April, on which 14 unique vessels were recorded intersecting the Proposed Development array area.

A breakdown of the daily unique vessel count intersecting the Proposed Development array area is presented in Figure E.17 by vessel type.

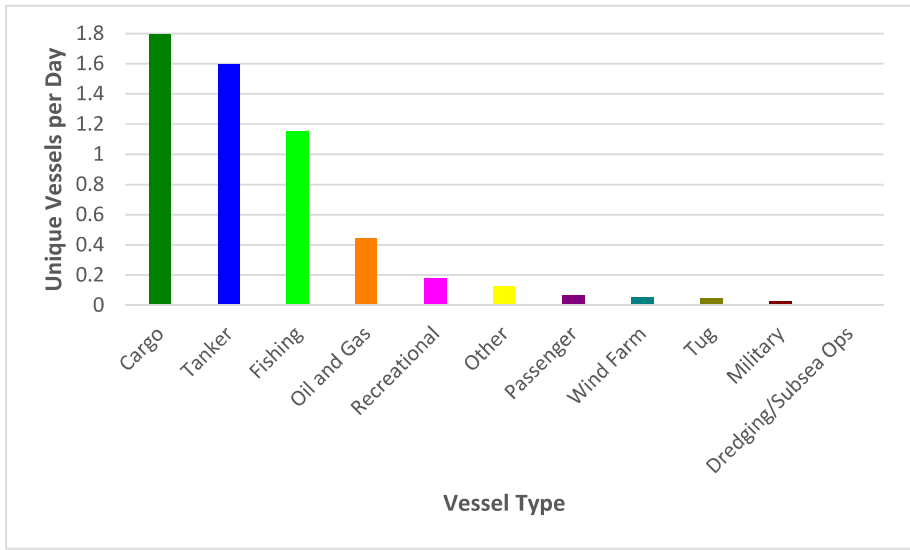


Figure E.17 Distribution of Vessels intersecting the Proposed Development array area by Vessel Type

The most common vessel types recorded within the Proposed Development array area were cargo vessels (comprising 33% of all vessels), followed by tankers (29%), and commercial fishing vessels (23%).

It can be seen from Figure E.17 that significant levels of commercial activity were observed within the Proposed Development array area. On average, two cargo vessels and one to two tankers per day passed through the Proposed Development array area, while an average of one passenger vessel every two weeks was also recorded.

E.5 Survey Data Comparison

Survey data recorded during 14-day periods in August 2022 and January 2021 were collected using a combination of AIS, radar, and visual observations. This subsection provides comparison of the 28-day survey period (summer and winter combined) against the long-term 2019 AIS data.

A comparison of the average number of each main vessel type recorded during the long-term 2019 data period and the 14-day survey periods is presented in Table E.2.

Table E.2 Average Daily Vessel Counts by Type for Survey Data and Long-Term Data

Vessel Type	Long-term 2019 AIS Data (Vessels per Day)			Winter Survey (January 2021)	Summer Survey (August 2022)
	Quietest Month	Busiest Month	Average Vessels per Day	Average Vessels per Day	Average Vessels per Day
Tankers	4-5	5-6	2	5	4
Cargo vessels	3	6	2	4	3
Commercial fishing vessels	2	4	1	3	1-2
Oil and gas vessels	0-1	1-2	1	1	0-1
Recreational vessels	0	1-2	0	0	1
Passenger vessels	0	1	0	0	1-2

The average daily vessel count within the long-term data was consistently slightly higher than for the survey periods; this may be attributed to the effects of the COVID-19 pandemic during the winter survey period, with traffic numbers in the process of recovering in the summer survey period. The absence of regularly scheduled passenger vessels in the vessel traffic surveys is also noted.

E.6 Conclusion

A year of AIS data during 2019 has been analysed to validate the winter 2021 and summer 2022 vessel traffic survey data recorded within the Proposed Development array area shipping and navigation study area.

The main type of vessels detected within the Proposed Development array area shipping and navigation study area during 2019 were tankers (33%), followed by cargo vessels (26%) and fishing vessels (22%). Similarly, main vessel types detected during the winter 2021 period were cargo vessels (36%), tankers (32%), and fishing vessels (16%). During summer 2022, the most common vessel types were tanker (30%) and tanker (23%), with increased passenger vessel numbers seen (12%) – fishing vessel numbers remained relatively high however (11%). Overall, the vessel types detected within the Proposed Development array area study area were similar between the vessel traffic survey data and long-term data, with differences in volumes of passenger vessel and recreational vessel traffic noted.

Appendix F Summer 2020 Vessel Traffic Data

Vessel traffic survey data covering a seasonal summer 2020 survey period comprising AIS, Radar, and visual observation data has been collected in addition to the main dataset assessed within the NRA. This appendix provides full assessment of the additional data and compares it to the findings of the NRA assessment.

On this basis the aims of this appendix are:

- Assess the summer 2020 survey data; and
- Compare the findings against the 2019 data used to inform the NRA.

It should be considered when viewing the analysis that COVID-19 pandemic may have impacted the 2020 data.

The AIS and Radar tracks from the summer 2020 survey period are presented in Figure F.1.

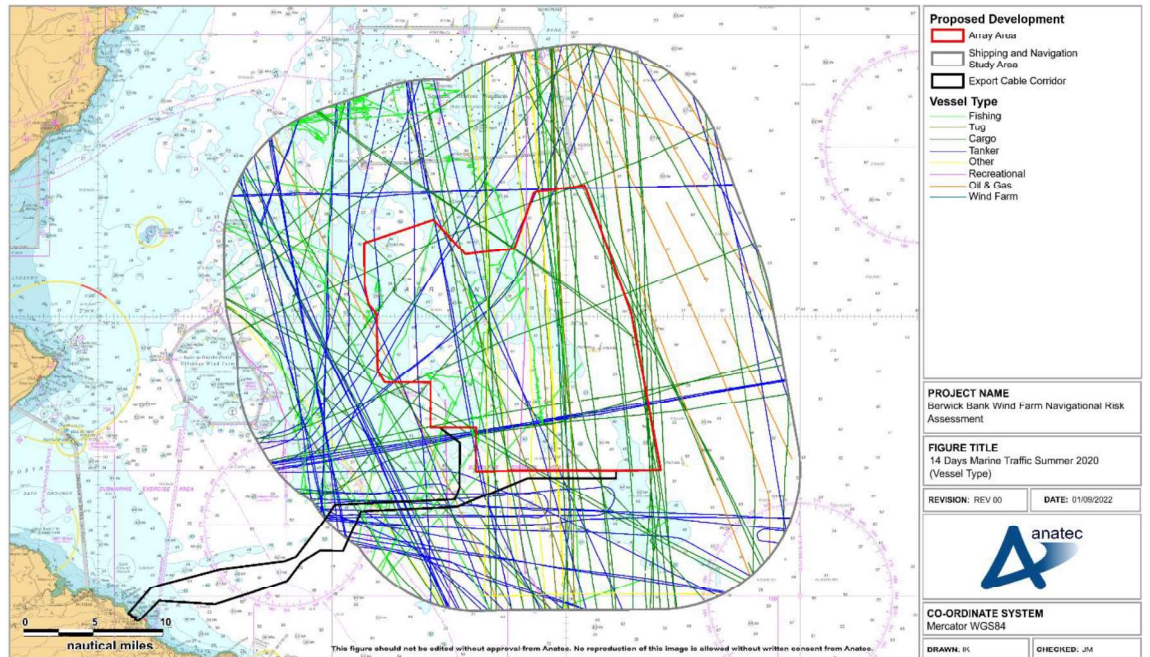


Figure F.1 14 Days Vessel Traffic Summer 2020 by Vessel Type

F.1 Vessel Count

For the 14 days analysed in the summer 2020 survey period, there was an average of 12 unique vessels per day recorded within the Proposed Development array area shipping and navigation study area. In terms of vessels intersecting the Proposed Development array area itself, there was an average of five unique vessels per day.

The daily number of unique vessels recorded within the Proposed Development array area shipping and navigation study area and the Proposed Development array area itself during

the summer 2020 survey period are presented in Figure F.2. Since the survey commenced and concluded midway through the first and last days of the summer survey period, the first and last days are partial.

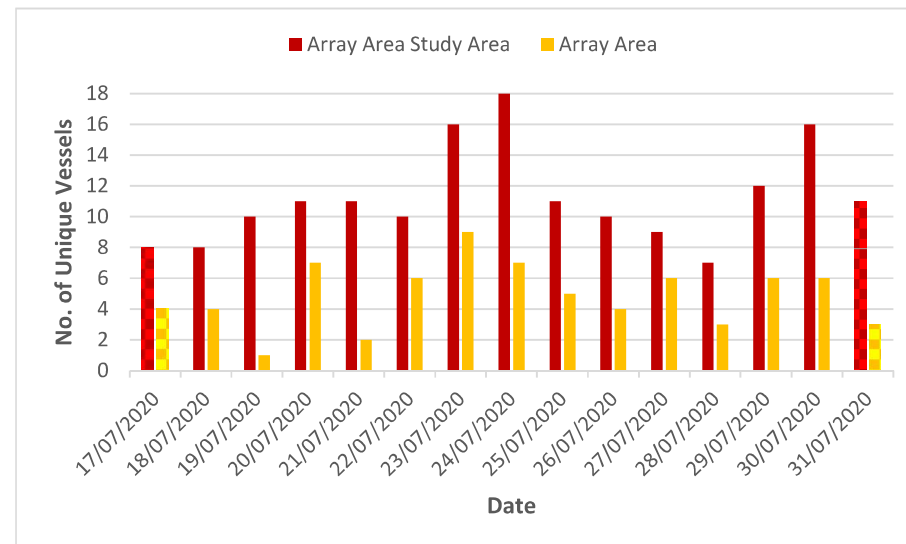


Figure F.2 Unique Vessels per Day within the Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2020)

Throughout the summer survey period, approximately 43% of unique vessel tracks recorded within the Proposed Development array area shipping and navigation study area intersected the Proposed Development array area itself.

The busiest day recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2020 survey period was 24 July when 18 unique vessels were recorded. The busiest day recorded within the Proposed Development array area itself throughout the summer survey period was 23 July when nine unique vessels were recorded.

The quietest full day recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2020 survey period was 28 July when seven unique vessels were recorded. The quietest full day recorded within the Proposed Development array area itself throughout the summer 2020 survey period was 19 July when one unique vessel was recorded.

F.2 Vessel Type

The percentage distribution of the main vessel types recorded within the Proposed Development array area shipping and navigation study area during the summer 2020 survey period is presented in Figure F.3.

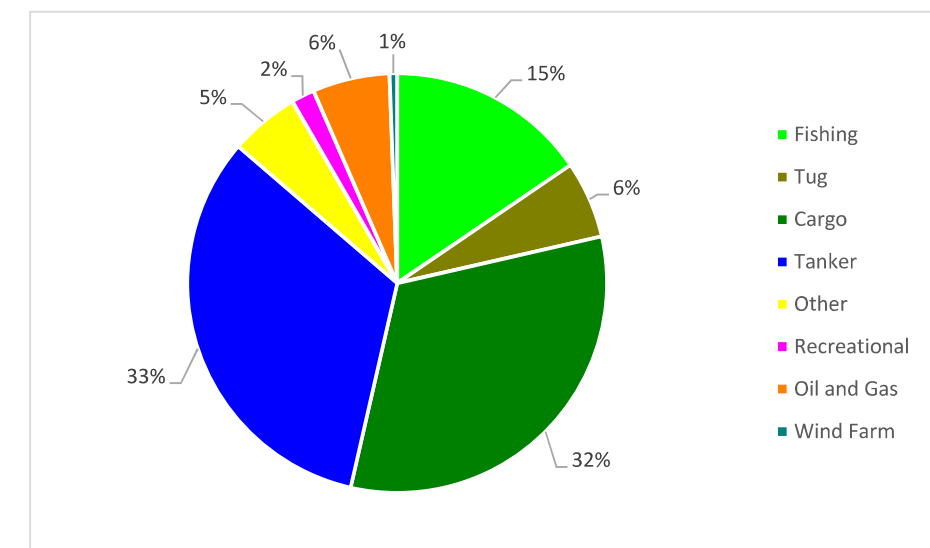


Figure F.3 Vessel Type Distribution within Proposed Development Array Area Shipping and Navigation Study Area (14 Days Summer 2020)

Throughout the summer period, the most common vessel types in the Proposed Development array area shipping and navigation study area were tankers (33%), cargo vessels (32%), and commercial fishing vessels (15%).

It is noted that no commercial ferries were identified in the summer 2020 vessel traffic survey data, which aligns with feedback provided by Forth Ports during consultation (see 10 June 2020 entry in Table 4.1).

F.2.1 Cargo Vessels

The tracks of cargo vessels recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2020 survey period are presented in Figure F.4.

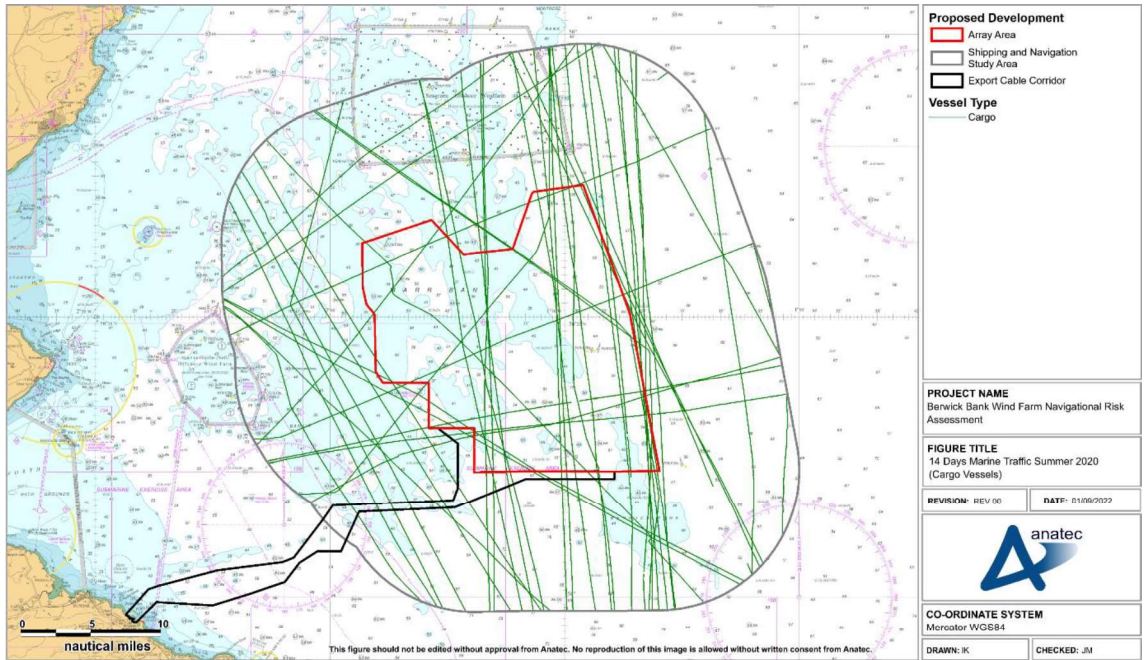


Figure F.4 14 Days Vessel Traffic Summer 2020 (Cargo Vessels)

Throughout the summer 2020 survey period an average of four unique cargo vessels per day were recorded within the Proposed Development array area shipping and navigation study area.

F.2.2 Tankers

The tracks of tankers recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2020 survey period are presented in Figure F.5

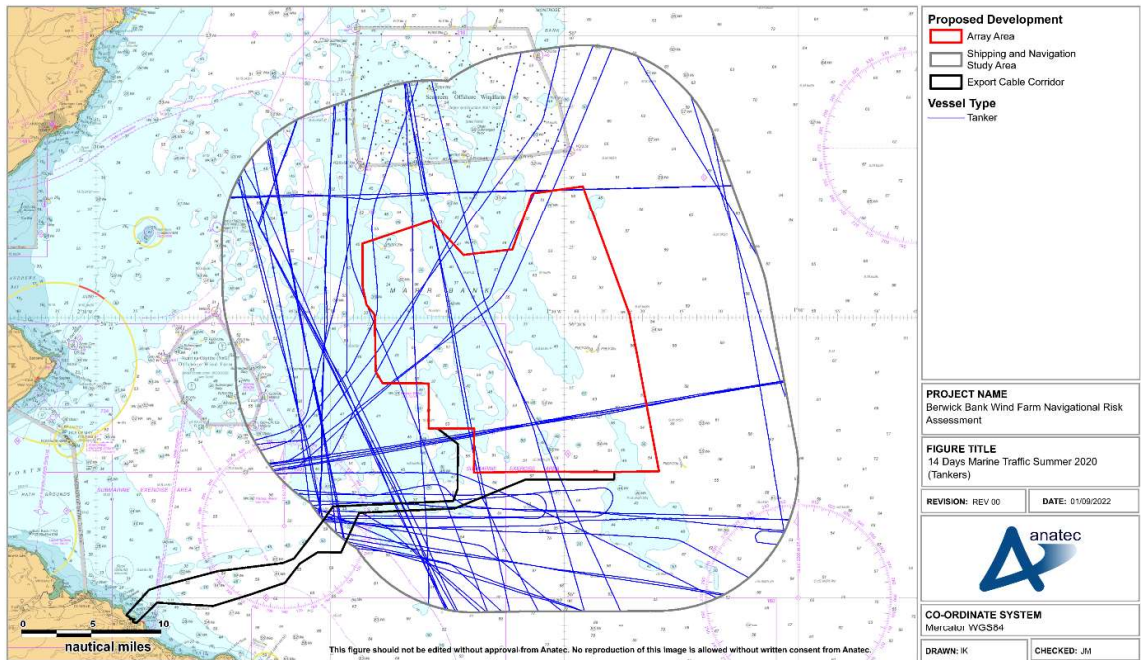


Figure F.5 14 Days Vessel Traffic Summer 2020 (Tankers)

Throughout the summer 2022 survey period an average of four unique tankers per day were recorded within the Proposed Development array area shipping and navigation study area.

F.2.3 Commercial Fishing Vessels

The tracks of commercial fishing vessels recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2020 survey period are presented in Figure F.6.

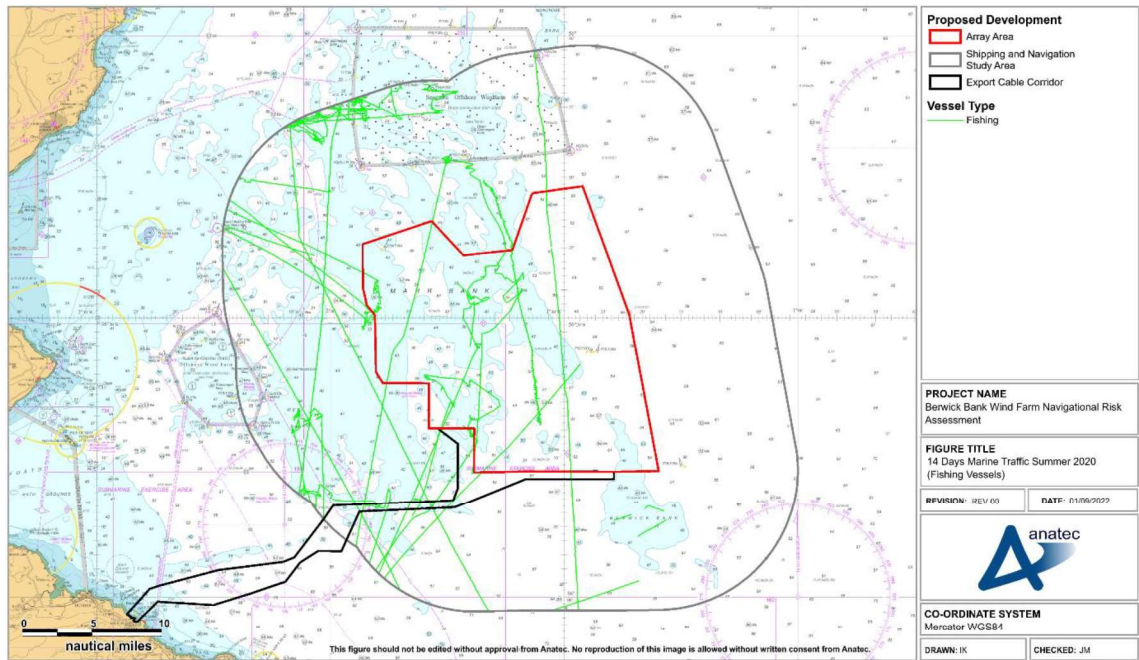


Figure F.6 14 Days Vessel Traffic Summer 2020 (Commercial Fishing Vessels)

Throughout the summer 2020 survey period an average of four unique commercial fishing vessels per day were recorded within the Proposed Development array area shipping and navigation study area.

F.2.4 Oil and Gas Vessels

The tracks of oil and gas vessels recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2020 survey period are presented in Figure F.7.

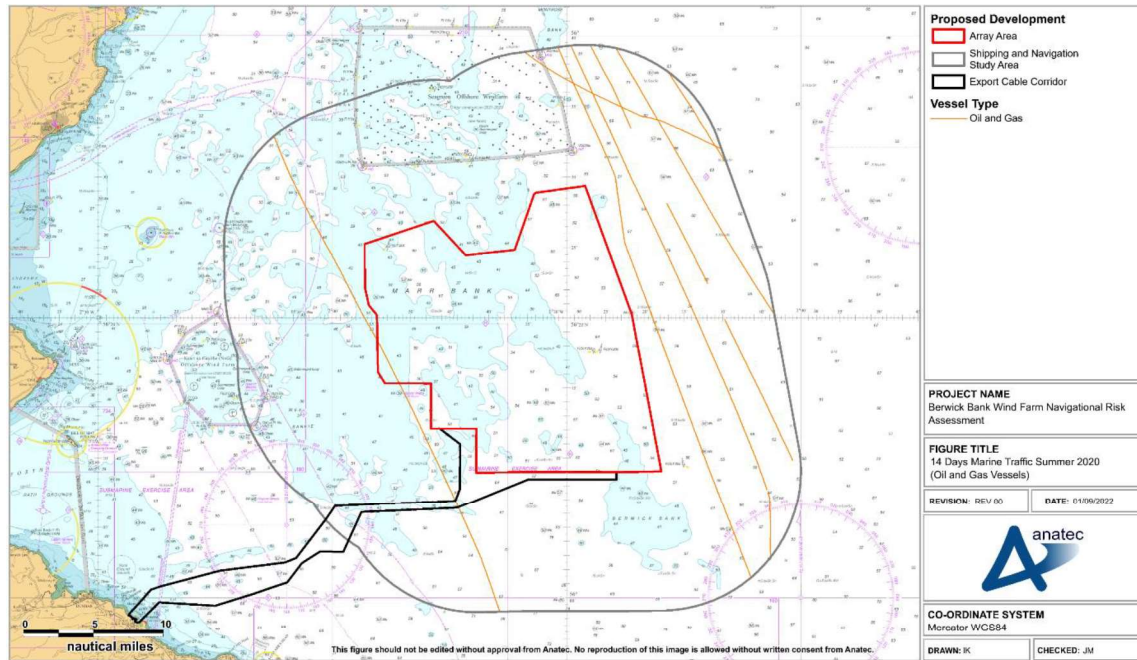


Figure F.7 14 Days Vessel Traffic Summer 2020 (Oil and Gas Vessels)

Throughout the summer 2020 survey period an average of four unique oil and gas vessels per day were recorded within the Proposed Development array area shipping and navigation study area.

F.2.5 Recreational Vessels

The tracks of recreational vessels recorded within the Proposed Development array area shipping and navigation study area throughout the summer 2020 survey period are presented in Figure F.8

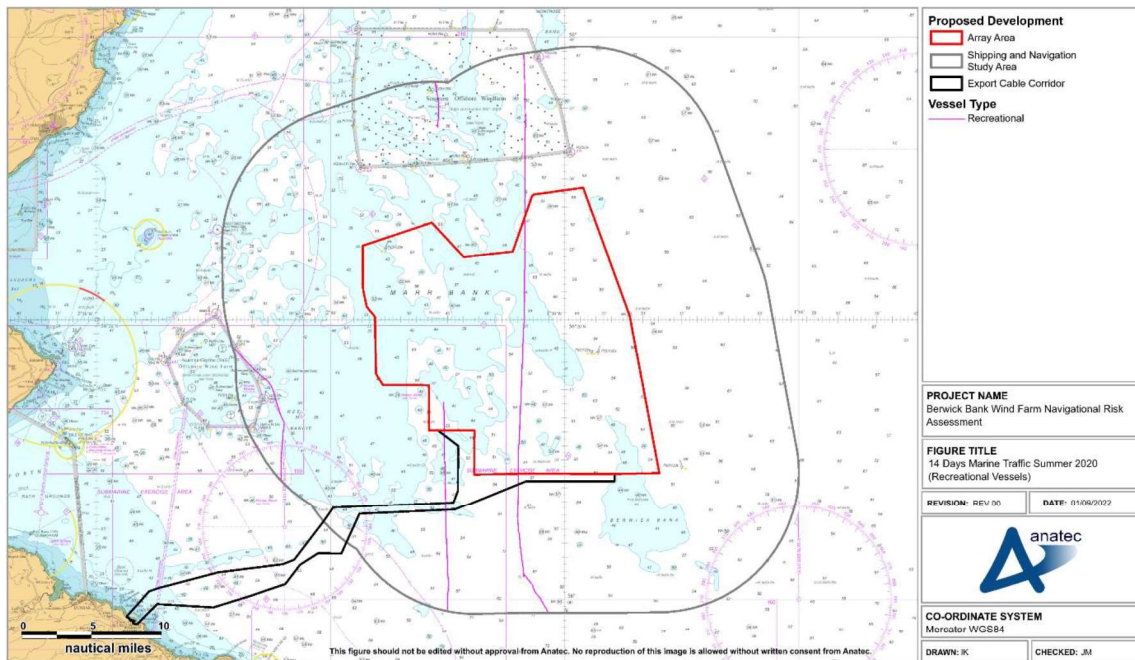


Figure F.8 14 Days Vessel Traffic Summer 2020 (Recreational Vessels)

Throughout the summer 2020 survey period an average of four unique recreational vessels per day were recorded within the Proposed Development array area shipping and navigation study area.

F.3 Site Specific Analysis

The following section details vessel traffic within the Proposed Development array area itself. The distribution of vessel types within the Proposed Development array area is presented in Figure F.9.

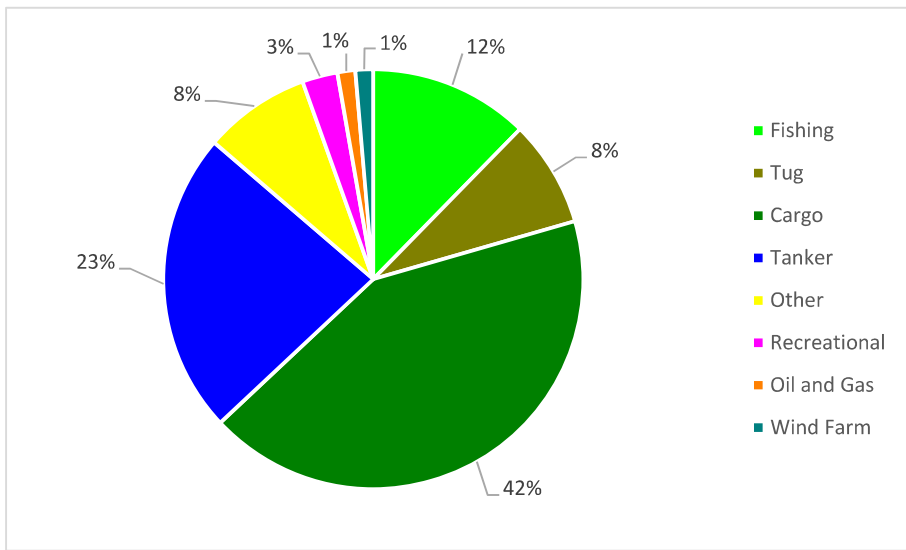


Figure F.9 Vessel Type Distribution within Proposed Development Array Area (14 Days Summer 2020)

The most common vessel types recorded within the Proposed Development array area were cargo vessels (42%), followed by tankers (23%), and commercial fishing vessels (12%).

It can be seen from Figure F.9 that significant levels of commercial activity were observed within the Proposed Development array area. On average, two cargo vessels and one tanker per day passed through the Proposed Development array area.

F.4 Survey Data Comparison

Survey data recorded during 14-day periods in August 2022 and January 2021 were collected using a combination of AIS, radar, and visual observations. This subsection provides comparison of the 28-day survey period (summer and winter combined) against the summer 2020 survey data.

A comparison of the average number of each main vessel type recorded during the summer 2020 survey data period and the 14-day survey periods is presented in Table F.1.

Table F.1 Average Daily Vessel Counts by Type for the 14-Day Survey Periods

Vessel Type	Summer 2020	Winter 2021	Summer 2022
Tankers	4	5	4
Cargo vessels	4	4	3
Commercial fishing vessels	2	3	1-2
Oil and gas vessels	0-1	1	0-1

Vessel Type	Summer 2020	Winter 2021	Summer 2022
Recreational vessels	0-1	0	1
Passenger vessels	0	0	1-2

The average daily vessel count within the summer 2020 survey data was broadly similar to the summer 2022 survey data, and slightly lower than for the winter survey periods. As with the winter 2021 dataset there were no passenger vessels recorded in the summer 2020 data, which is likely related to the COVID-19 pandemic.

F.5 Conclusion

14 days of AIS, Radar, and visual observation data during summer 2020 has been analysed to validate the winter 2021 and summer 2022 vessel traffic survey data recorded within the Proposed Development array area shipping and navigation study area.

The main type of vessels detected within the Proposed Development array area shipping and navigation study area during summer 2020 were tankers (33%), followed by cargo vessels (32%) and fishing vessels (15%). Similarly, main vessel types detected during the winter 2021 period were cargo vessels (36%), tankers (32%), and fishing vessels (16%). During summer 2022, the most common vessel types were cargo vessels (30%) and tanker (23%), with increased passenger vessel numbers seen (12%) – fishing vessel numbers remained relatively high however (11%). Overall, the vessel types detected within the Proposed Development array area study area were similar between the vessel traffic survey data and summer 2020 data.

