



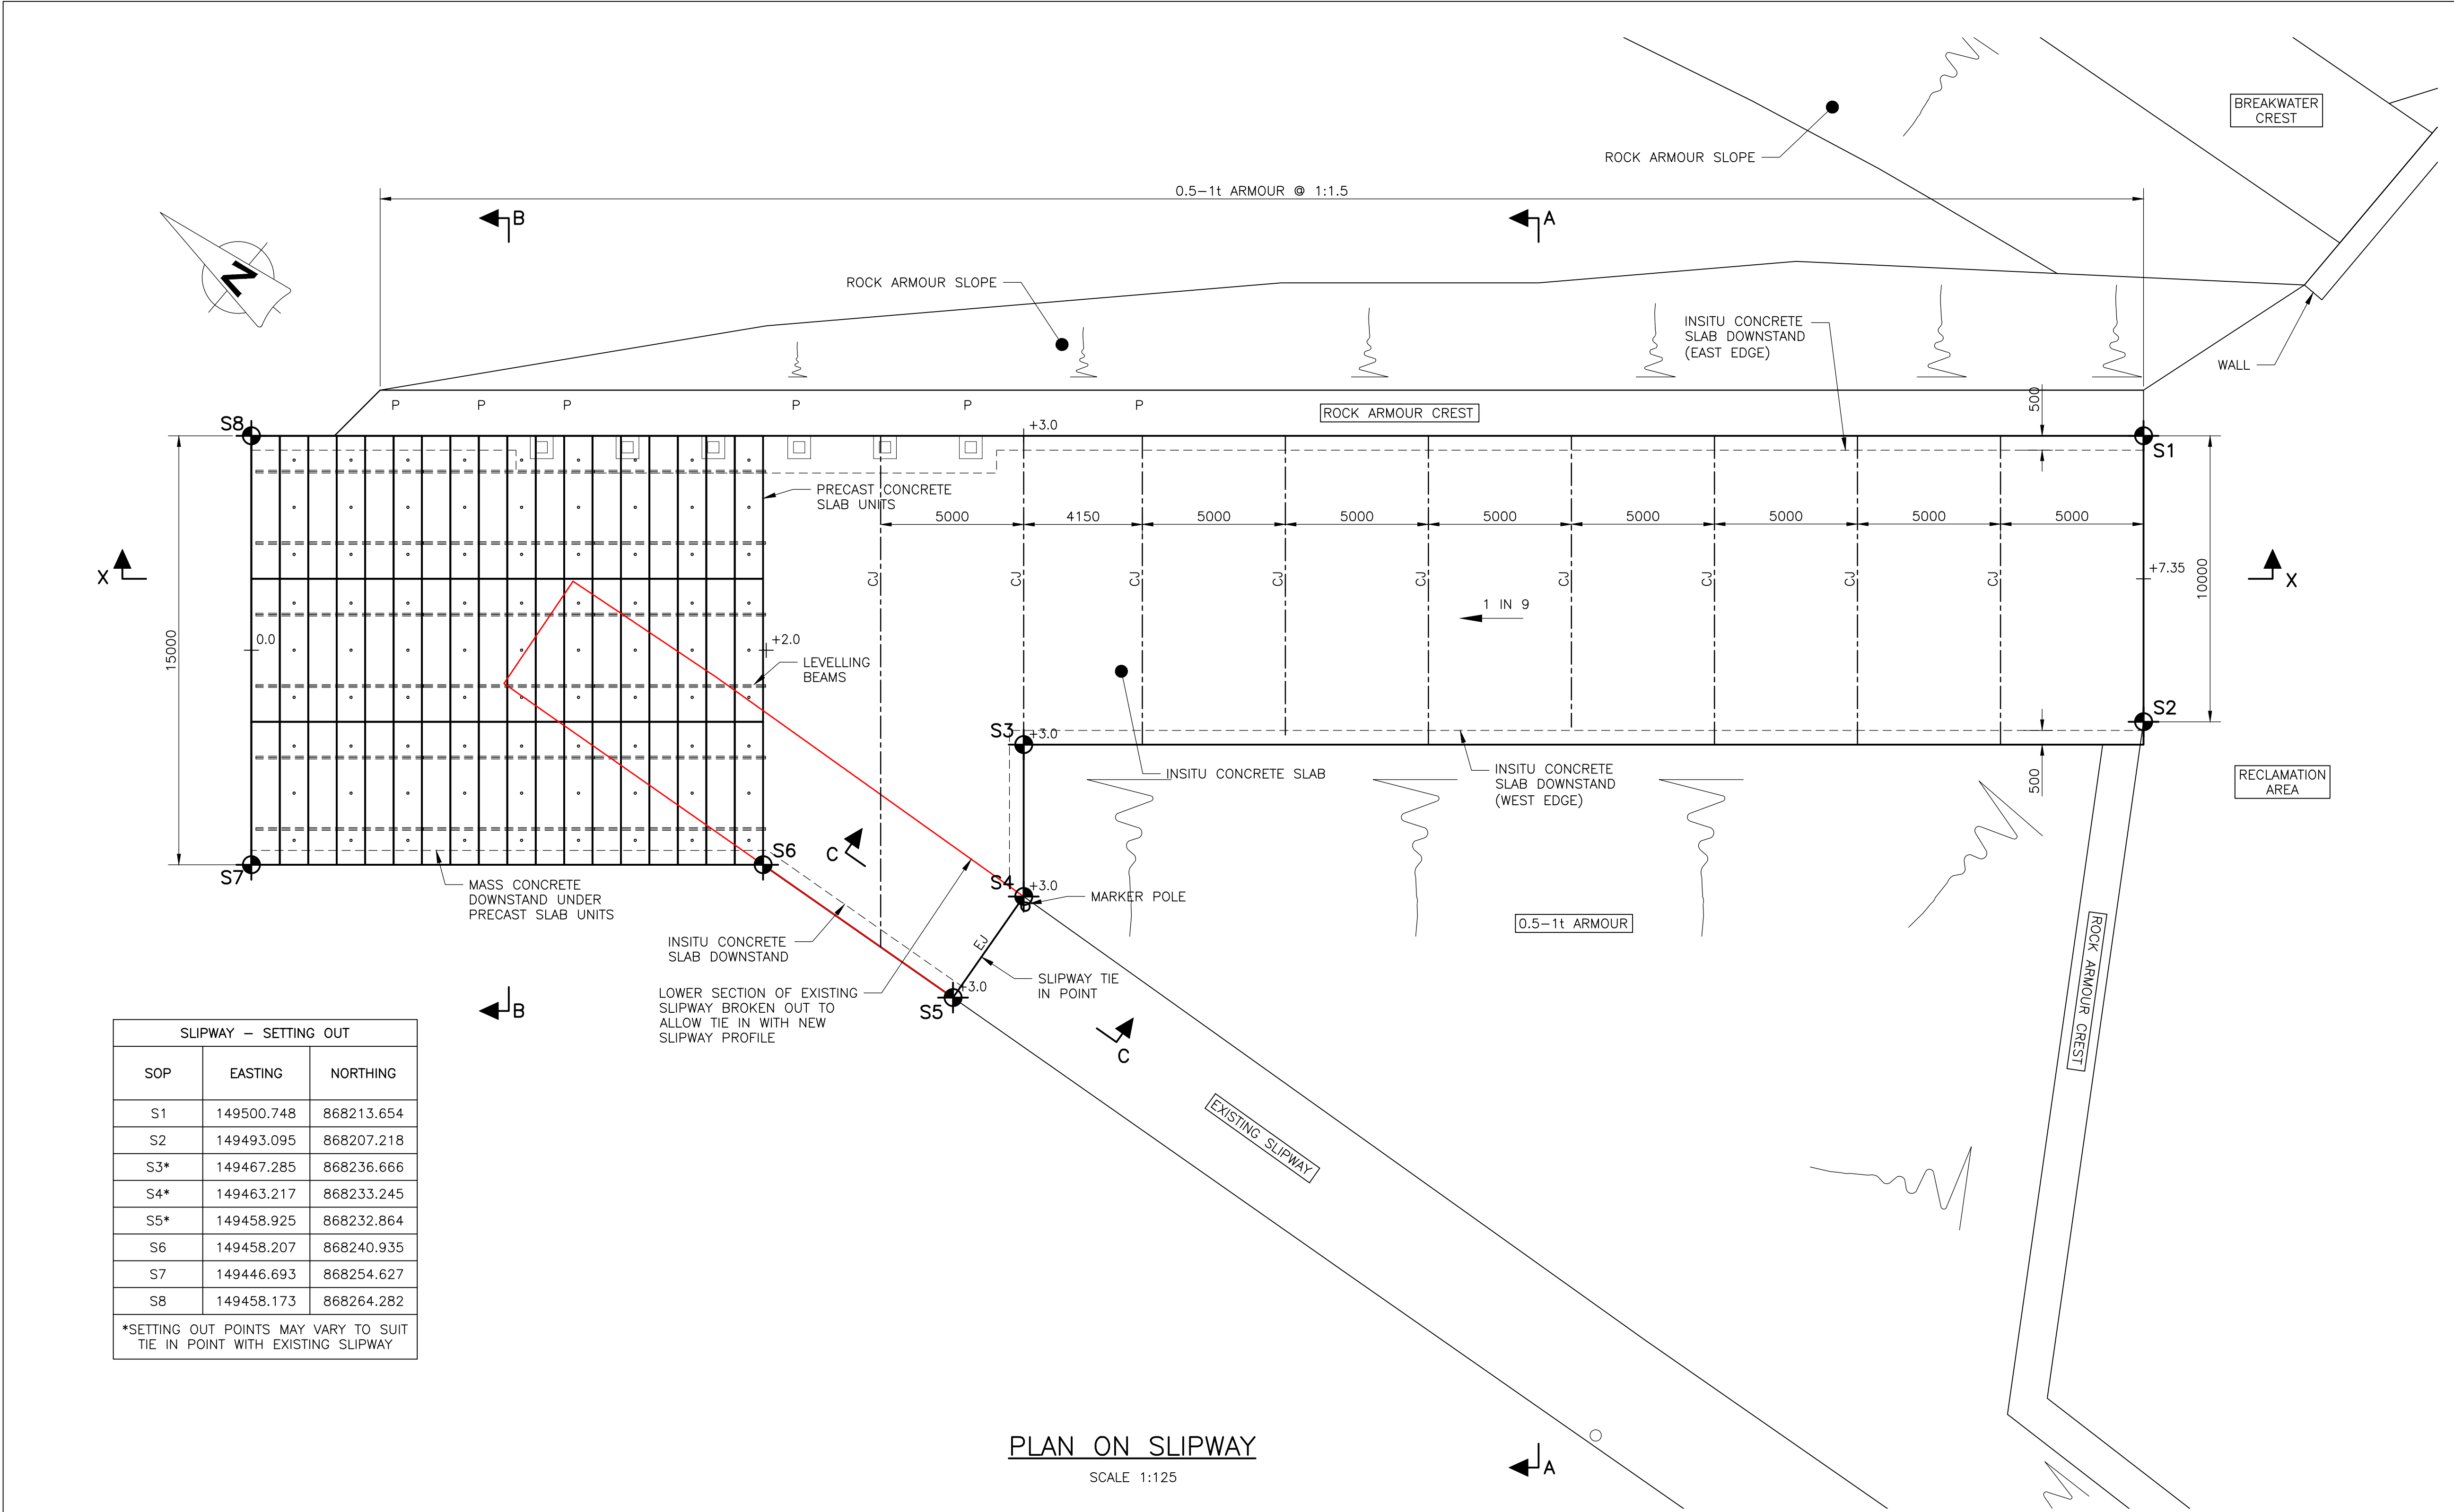

SLIPWAY – SETTING OUT		
SOP	EASTING	NORTHING
S1	149500.748	868213.654
S2	149493.095	868207.218
S3*	149467.285	868236.666
S4*	149463.217	868233.245
S5*	149458.925	868232.864
S6	149458.207	868240.935
S7	149446.693	868254.627
S8	149458.173	868264.282
*SETTING OUT POINTS MAY VARY TO SUIT TIE IN POINT WITH EXISTING SLIPWAY		

PLAN ON SLIPWAY
SCALE 1:125

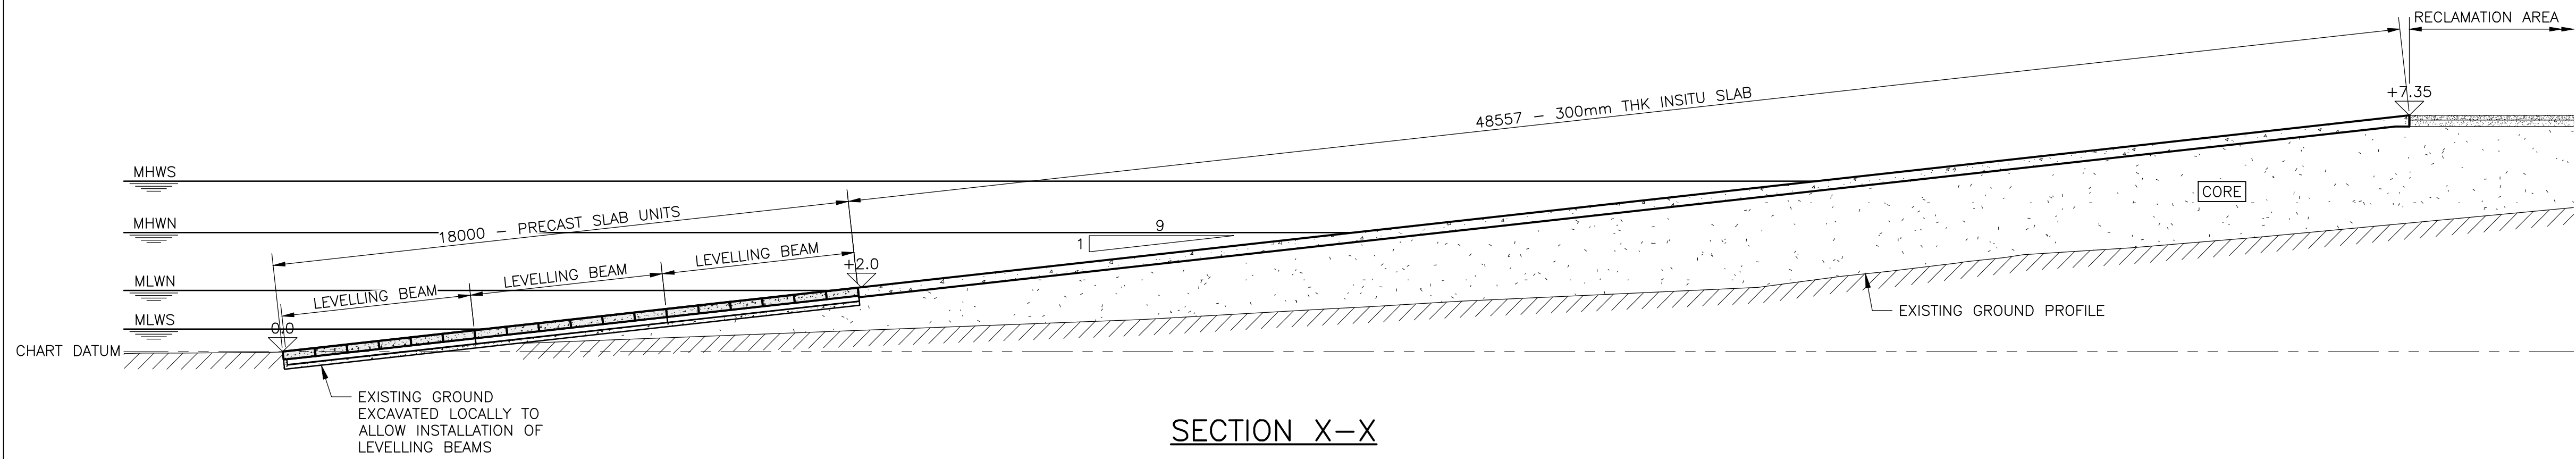

SECTION X-X
SCALE 1:125

- GENERAL NOTES
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
 - ALL LEVELS ARE IN METRES RELATIVE TO CHART DATUM
 - HAT +6.0m CD
MHWS +5.3m CD
MHWN +3.7m CD
MLWN +1.9m CD
MLWS +0.7m CD
LAT +0.1m CD
 - CHART DATUM IS 2.63m BELOW ORDNANCE DATUM.
 - ALL STEELWORK GRADE S275, UNLESS NOTED OTHERWISE.
 - ALL STEELWORK GALVANISED IN ACCORDANCE WITH THE SPECIFICATION.
 - ALL STRUCTURAL CONCRETE FOR INSITU SLIPWAY SLAB CLASS C32/40 TO BS EN 206 WHERE CONCRETE PLACED ABOVE WATER. CLASS UW CONCRETE (UNDERWATER) USED BELOW WATER AND FOR CONCRETE IMMERSSED WITHIN 3HRS OF POURING.
 - INFILL CONCRETE TO BE C32/40 UW.
 - ALL INSITU CONCRETE TO HAVE A TAMPED NON-SLIP TOP SURFACE FINISH.
 - PRECAST SLAB UNITS TO BE LIFTED USING A LIFTING BEAM.
 - PRECAST SLAB UNITS TO BE CONCRETED AFTER NOT MORE THAN THREE UNITS ARE PLACED.
 - FOR SLIPWAY SECTIONS AND DETAILS, REFER TO DRAWING 2297-402.
 - FOR INSITU SLIPWAY SLAB RC DETAILS, REFER TO DRAWING 2297/712.

LEGEND					
P	—	DRYING OUT POST			
CJ	—	CONTRACTION JOINT			
EJ	—	EXPANSION JOINT			
REV	DATE	DETAILS	DRAWN	CHK'D	APP'D
AMENDMENTS					

CLIENT
STAFFIN COMMUNITY TRUST

PROJECT
STAFFIN HARBOUR DEVELOPMENT

Wallace Stone
Consulting Civil Engineers

GLASGOW 0141 554 8233
glasgow@wallacestone.co.uk

DINGWALL 01349 866775
dingwall@wallacestone.co.uk

HEBRIDES 01851 600220
hebrides@wallacestone.co.uk

DRAWING TITLE		
SLIPWAY GENERAL ARRANGEMENT		
DRAWN JA	CHECKED DA	APPROVED GB
DATE APR 22	DATE JUL 24	DATE JUL 24
SCALE (A1) AS SHOWN	STAGE PRELIMINARY	REV
DRAWING No. 2297-401		