

# **MOCEAN ENERGY | M100P**

**EMEC Scapa Flow Test Site**

**Navigational Risk Assessment Addendum**

**June 2020**

## Purpose

This document is provided as an addendum to and should be read in conjunction with the document 'Scapa Flow Scale Wave Site Navigational Risk Assessment (NRA) – REP299'. It describes the key project-specific navigational risks to be addressed in relation to proposed activities at the European Marine Energy Centre test site at Scapa Flow, Orkney Islands, together with proposed mitigation for reduction/elimination of these risks. Site location navigational risks are covered in the site-wide Scapa Flow NRA produced by EMEC.

This document has been prepared to support a marine licence application for the Mocean Energy M100P. For further information regarding the project, please refer to the Project Information Summary.

## Document History

Revision	Date	Description	Originated by	Reviewed by	Approved by
1	09/06/20	Submitted	DL (EMEC)	JC (ME)	

## Contents

1	Introduction .....	1
2	Project overview.....	1
2.1	Asset information .....	1
2.2	Schedule and test plan .....	4
2.3	Deployment location .....	4
3	Key navigational themes.....	6
3.1	Vessel routing.....	6
3.2	Contact / allision risk.....	6
3.3	Effects of tide / tidal streams and weather.....	6
3.4	Collision risk and visual navigation.....	6
3.5	Communication, radar and positioning system.....	6
3.6	Moorings.....	6
3.7	Station keeping .....	6
3.8	Fishing activity .....	6
3.9	Recreational activity.....	7
3.10	Subsea cables .....	7
3.11	Search and rescue.....	7
3.12	Cumulative and in-combination.....	7
4	Risk controls .....	7
4.1	Site-wide risk controls .....	7
4.2	Project-specific risk controls.....	8
5	Summary and conclusion.....	10
	Appendix A: Proposed Schedule .....	1

---

## List of Figures

Figure 1. M100P visualisation on pier. ....	2
Figure 2. M100P visualisation as deployed at sea.....	2
Figure 3. M100P drawing with dimensions. ....	3
Figure 4. Mooring leg structure .....	4
Figure 5. Marine licence boundary (red line), site boundary (black dashed line), and berths (purple dots).....	5

## List of Tables

Table 1. Key dimensions of the M100P.....	3
Table 2. Coordinates of berth and test site boundary .....	5
Table 3. EMEC embedded risk controls for Shapinsay Sound test site .....	7
Table 4. Project-specific risk controls .....	8
Table 5. Project Programme .....	1

# 1 Introduction

Mocean Energy, based in Edinburgh, is developing wave energy converters (WECs) for various applications from small-scale off-grid use to large, utility-scale projects. Its core technology is its hinged raft WEC, which consists of two hulls with novel shapes connected by a single hinge. Wave forcing, and the hulls' dynamics cause a rotation about the hinge, which is converted to electricity via a power take-off system.

Mocean Energy have built an expert team combining scientific principles and real-world experience to develop new technologies which can harness the power of waves – and accelerate the transition to a zero-carbon world.

Mocean's approach utilises numerical modelling and optimisation, rapid prototyping and tank testing – allied to hard-won ocean experience – to deliver wave energy machines that produce high levels of power for their size and work in some of the world's harshest environments.

This assessment has been produced as an addendum to the site-wide Navigational Risk Assessment for the Scapa Flow test site. This document identifies and assesses any project-specific navigational risks and discusses the proposed risk control measures to be implemented in order to reduce the risk associated with the project.

## 2 Project overview

Further information regarding the project is available in the Project Information Summary.

### 2.1 Asset information

The M100P consists of two yellow painted steel hulls connected at a hinge through a pair of steel hinge pins. The key dimensions of the machine are given in Table 1. Figure 1 shows a visualisation of the machine on the pier. Figure 2 shows a visualisation of the machine deployed at sea; however, the mooring lines are not shown here. Note that in both figures, the machine will be painted yellow. Figure 3 gives the general arrangement of the machine.

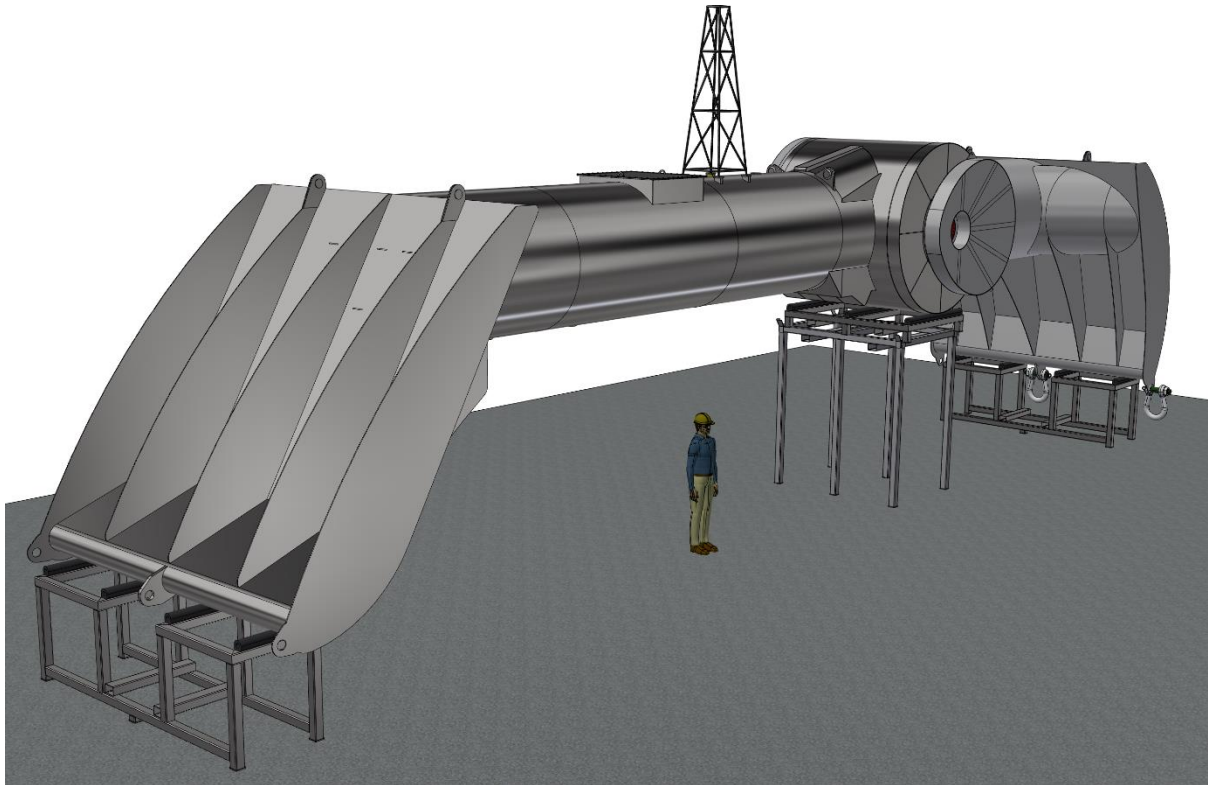


Figure 1. M100P visualisation on pier.

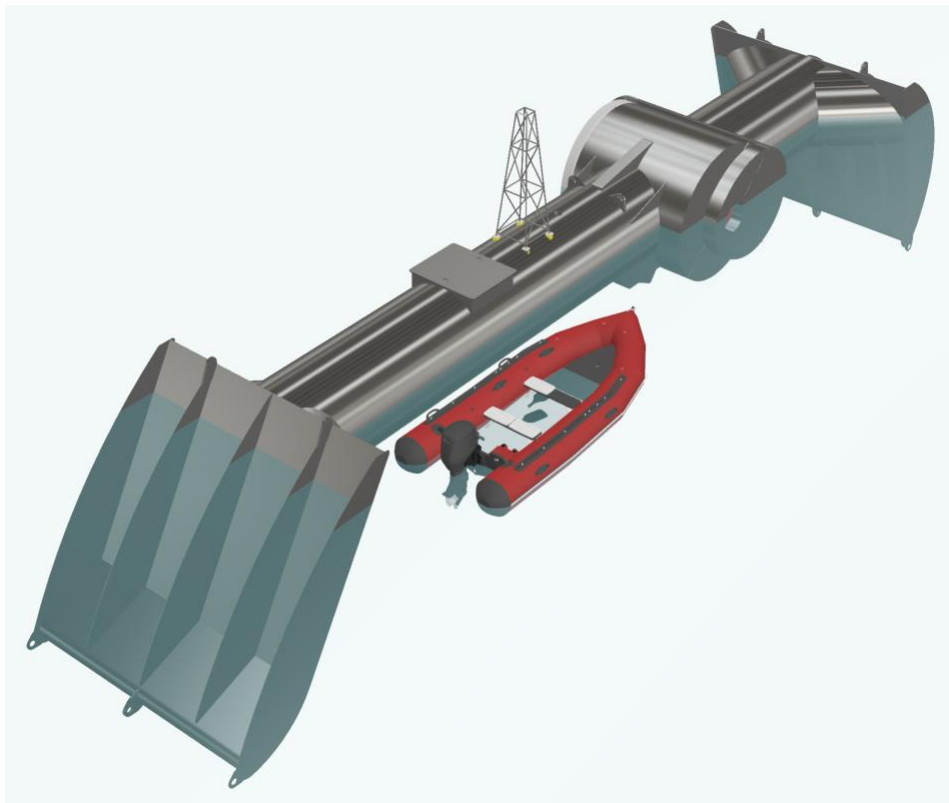


Figure 2. M100P visualisation as deployed at sea.

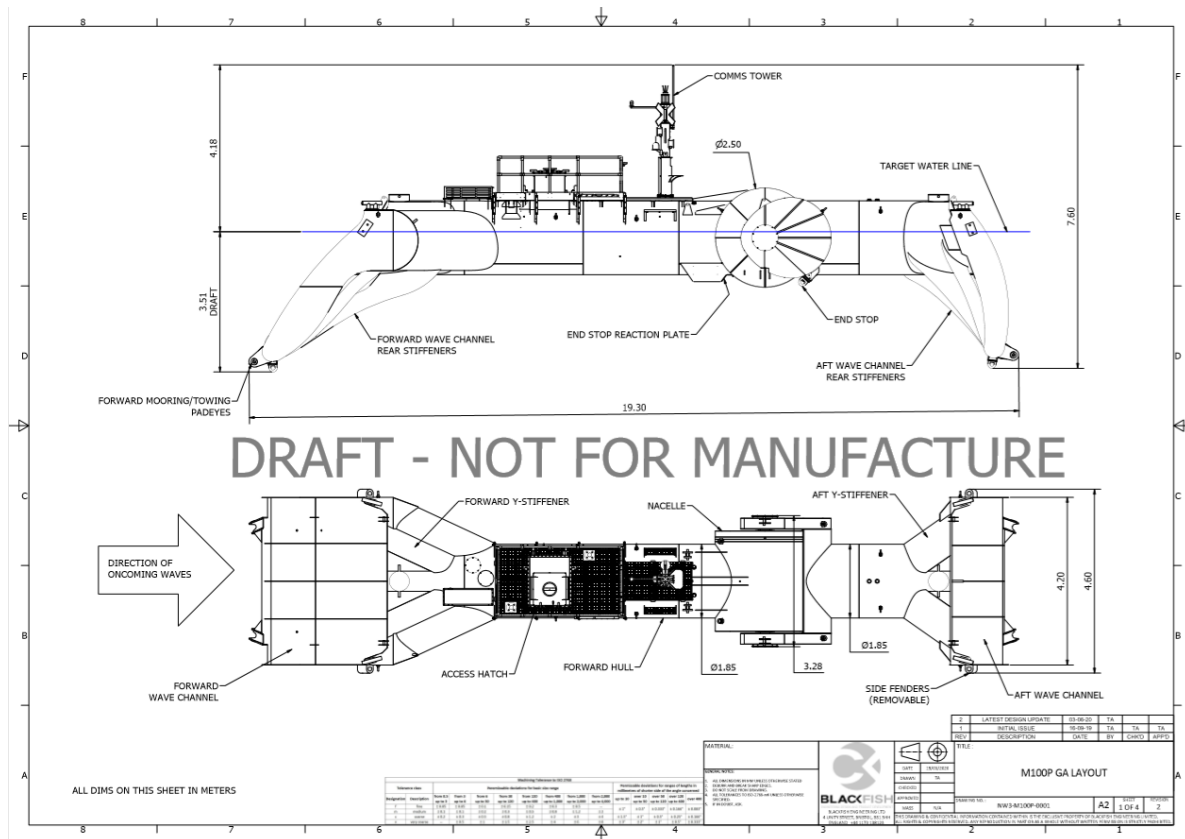


Figure 3. M100P drawing with dimensions.

Table 1. Key dimensions of the M100P.

Dimensions	Units	Value
Length Overall	m	19.2
Beam	m	4.2
Draft	m	3.4
Mass	tonnes	31.5

The rotation of the aft hull with respect to the forward hull drives a gearbox and then a generator. Power from the generator is then conditioned and used onboard the WEC to power local system. Power beyond that needed to power on-board systems is stored in 30 kWh of batteries. Once the batteries are fully charged, excess power is dissipated through an onboard dump resistor. Key onboard systems that use power include: the control, communications, cooling, instrumentation, and navigation lighting.

Figure 4 shows the construction of the mooring system. The system is made of 2 mooring lines, the mooring attachment points on the 2 legs are attached to a bridle at the forward mooring point on the WEC.

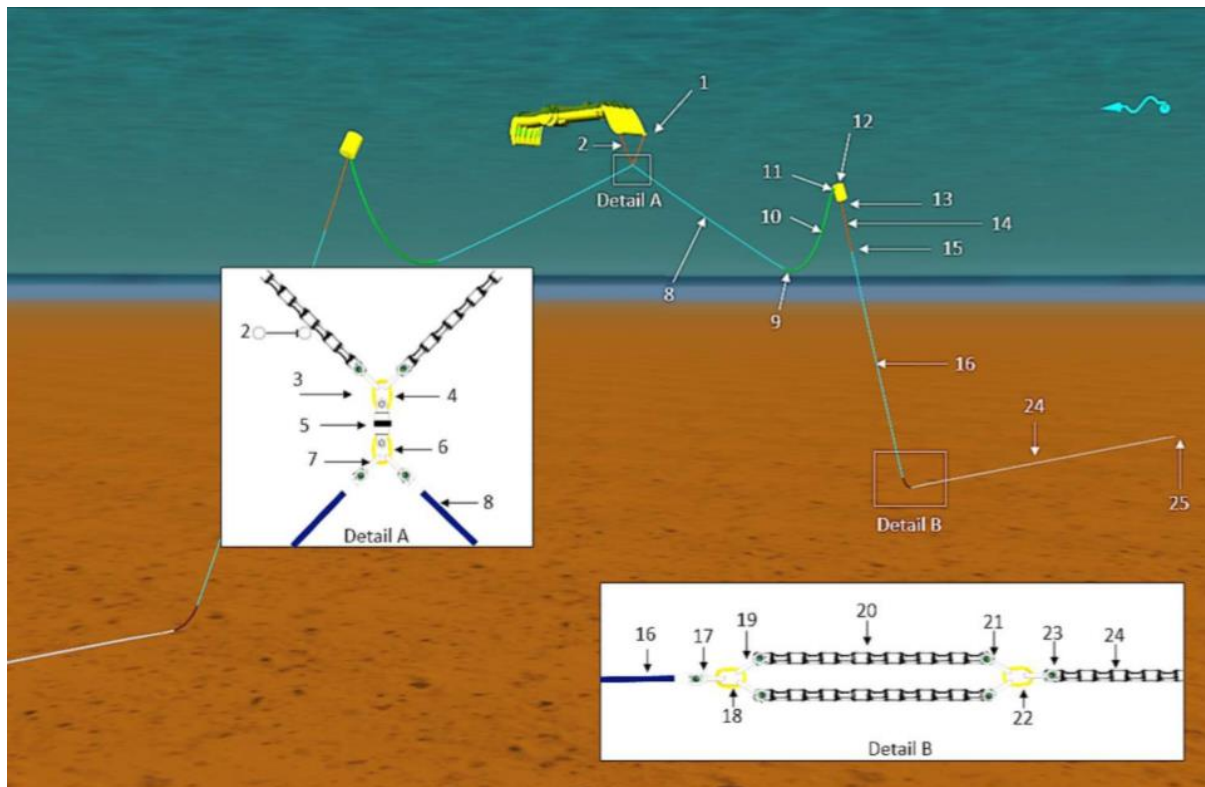


Figure 4. Mooring leg structure

Previous designs have been completed for the Dearness deployment, however due to the change of testing location and shallower water depths the moorings must be redesigned. The general design will remain the same, however due to shallower water depths, lengths and mooring spread will change. The exact specifications and measurements of mooring design have not been finalised yet by Leask Marine, and will be supplied to Marine Scotland once completed.

## 2.2 Schedule and test plan

The proposed schedule (indicative) for the Project is shown in Appendix A. The anticipated date of installation of the M100P and its associated mooring system is October 2020. The operational period of the test is anticipated to last up to 16 weeks. To allow some contingency in the programme, the marine licence application will cover the period until 30 April 2020. Thereafter, all equipment will be completely removed from site.

## 2.3 Deployment location

The device will be deployed at Berth 2 within the EMEC Scapa Flow scale test site.



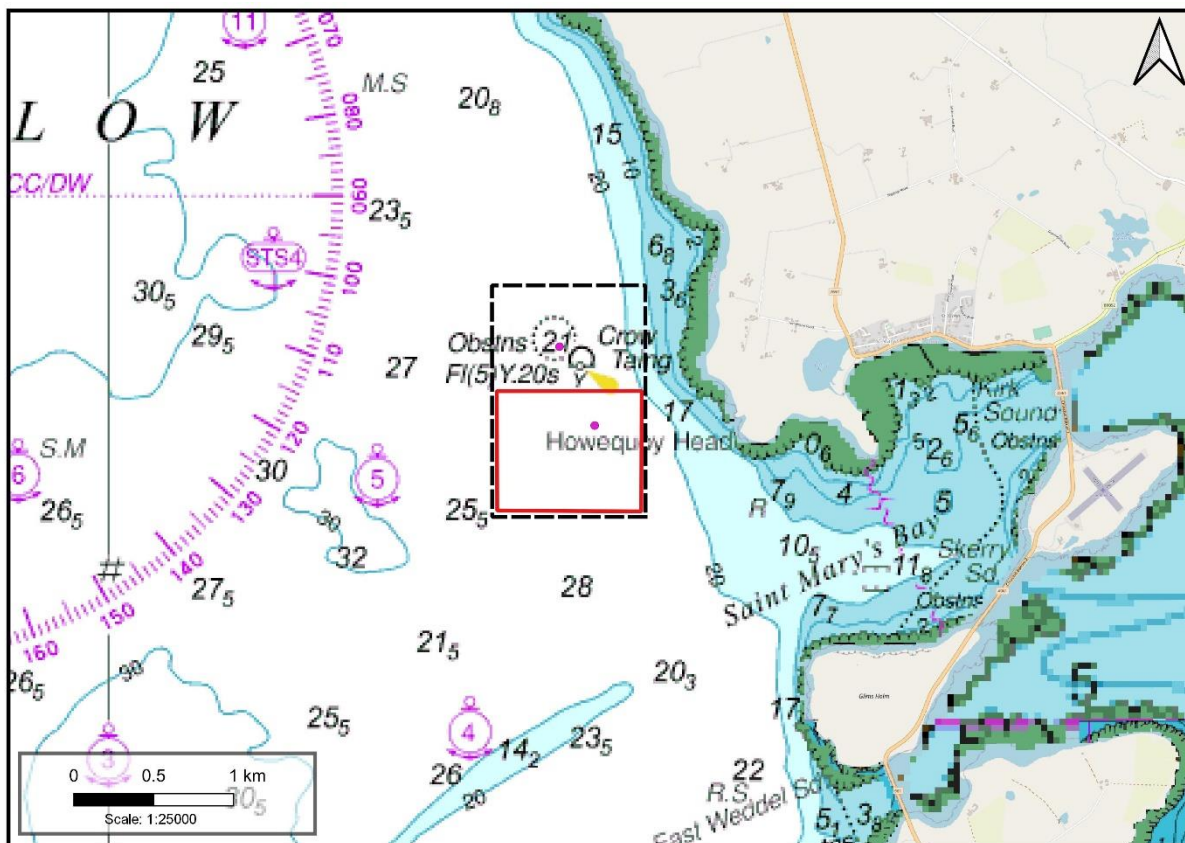


Figure 5. Marine licence boundary (red line), site boundary (black dashed line), and berths (purple dots)

Table 2. Coordinates of berth and test site boundary

Location Description	Latitude and longitude (WGS 84)				UTM (Eastings and Northings)			
	Corner A	Corner B	Corner C	Corner D	Corner A	Corner B	Corner C	Corner D
Berth 2	58° 53.28'N, 002° 56.50'W				503039N, 6527948E			
Test site boundary points	58° 53.950' N	58° 53.170' N	58° 53.170' N	58° 53.950' N	6528826 E	6527378 E	6527377 E	6528826 E
	002° 56.500' W	002° 56.500' W	002° 57.500' W	002° 56.500' W	503361 N	503362 N	502402 N	503361 N
Marine Licence Boundary	58° 53.59' N	58° 53.19' N	58° 53.19' N	58° 53.59' N	6528157 E	6527415 E	6527415 E	6528158 E
	002° 57.47' W	002° 57.47' W	002° 56.53' W	002° 56.53' W	502430 N	502431 N	503334 N	503333 N

## 3 Key navigational themes

In order to complete this project-specific assessment, a comprehensive review of the site-wide NRA for EMEC's Scapa Flow test site was conducted. The following navigational themes have been considered during the assessment.

### 3.1 Vessel routing

The Scapa Flow test site is not in close proximity to any shipping routes. Any vessels that do transit the site or in waters adjacent to the site will be aware of the test site presence as it is marked on United Kingdom Hydrographic Charts. Also, a notice to mariners will be issued by Orkney Harbours Authority before any works relating to this project are undertaken.

### 3.2 Contact / allision risk

A notice to mariners and uses of appropriate marking and lighting to alert other mariners to the device should mitigate the risk of contact. The test site is charted on the United Kingdom Hydrographic Office Charts.

### 3.3 Effects of tide / tidal streams and weather

The location of the Scapa Flow scale site was initially selected due to the benign conditions that characterise the site. As the device will be deployed within a sheltered scale site, there is no significant risk associated with tide, tidal streams, and weather.

### 3.4 Collision risk and visual navigation

The device is submerged below the surface of the water and the scale of the assets to be installed during this project are not expected to hinder visual navigation. The exception may be small craft such as open top RIBs, workboats, or multicat vessels that will periodically perform maintenance tasks.

### 3.5 Communication, radar and positioning system

The scale of the assets to be installed during this project are not likely to impact on electronic communication or positioning systems. Given that no generating infrastructure exists above the surface, there is no anticipated impact upon communications, radar and positioning systems.

### 3.6 Moorings

The moorings will be marked by a site surface buoy when not in use.

### 3.7 Station keeping

The device has AIS capabilities, therefore if moorings failed and the device became loose the relevant personnel would be notified immediately.

### 3.8 Fishing activity

Fishermen would generally be expected to take precautions in order to avoid any underwater assets that may be present at the test site, especially if devices or vessels were onsite.

### 3.9 Recreational activity

There is minimal racing or small boat sailing at the test site, and few recreational vessels are recorded in the vicinity.

### 3.10 Subsea cables

There is no evidence of anchoring or gear snagging at Scapa Flow historically.

### 3.11 Search and rescue

The device will not alter the capability of search and rescue operations in the area or interfere with neither RNLI nor helicopter operations.

### 3.12 Cumulative and in-combination

There are no other developments within the area, thus no anticipated cumulative or in-combination effects are expected.

## 4 Risk controls

### 4.1 Site-wide risk controls

A number of risk controls are embedded by the processes EMEC has implemented in order to operate the site and the layout of the Shapinsay Sound test site. The embedded risk control measures are detailed in Table 3.

Table 3. EMEC embedded risk controls for Shapinsay Sound test site

ID	Embedded risk control	Description
1.	PPE Requirement	Maintenance teams to wear suitable PPE when working on the assets, including life jackets.
2.	Training of staff	Staff to be trained to the required standards for their work and have suitable local knowledge of regulations and operations in the Orkney Islands.
3.	Emergency Risk and Cooperation Plan (ERCoP)	ERCoP for site developed and agreed with the MCA and SAR bodies to be consulted.
4.	NtM and Promulgation	In addition to NtM, EMEC's Maritime Safety Information Standard Operating Procedures (SOP) ensures that all key navigational consultees are informed prior to any works. Distribution could include HMCG, Orkney Harbours (available via Orkney Islands Council Marine Services website), Orkney Marina noticeboards (as necessary), Orkney Fisheries Association, Scottish Fisheries Federation and UKHO. Stakeholders are targeted with information about relevant assets based on their activities and location.
5.	Incident monitoring and reporting	EMEC to encourage incident/near miss reporting and monitor any safety issues at the test site. If necessary, risk control to be reviewed. Risk assessments to be reviewed following any incidents.
6.	EMEC Procedures	EMEC has a number of SOP and standards in place to reduce navigation risks, such as:

ID	Embedded control risk	Description
		<ul style="list-style-type: none"> <li>• Task risk assessment;</li> <li>• Control of work (permit to access)</li> <li>• Hazard identification reporting; and</li> <li>• Maritime safety information.</li> </ul>
7.	Hydrography	Contractual responsibility for developer to return the site to the original condition post-decommissioning.
8.	Charting	Site is marked on nautical charts.
9.	Site Monitoring	EMEC's SCADA system provides real-time status information, trends, alarms and remote-control access to facilitate a safe working environment, comprehensive assessment and safe operation of the sites. Note – only relevant if test support buoy is deployed
10.	Liaison with local stakeholders	EMEC regularly liaises with key local stakeholders to identify any potential issues as soon as possible. Regular updates include information regarding upcoming deployments and significant operations at the site.
11.	500m advisory ATBA	A 500m advisory ATBA exists around all test devices located at EMEC test sites.

## 4.2 Project-specific risk controls

The following table provides a description of the risk controls that will be implemented during the project.

Table 4. Project-specific risk controls

ID	Project-specific risk control	Description
1.	Radar reflectors	Use of a radar reflector to improve marking during times of poor visibility.
2.	AIS	Use of AtoN AIS (or virtual AIS if permitted) fitted to all surface piercing devices to improve visibility to passing vessels. AIS should be Category 3 with at least 97% up time and use Message 21, or as directed by the Northern Lighthouse Board (NLB).
3.	Heightened monitoring in adverse metocean conditions	During gale force winds, periodic monitoring of the devices is recommended to ensure excessive forces are not acting on the moorings which might cause a breakout.
4.	Inspection and maintenance programme	Regular maintenance regime by developer to check the asset, its fittings and any signs of wear and tear. This should identify any failings which might result in a mooring failure and breakout.  Refer to the findings of your third party verification mitigation against device breakage.
5.	GPS alert system for asset moving	Remote monitoring of device to detect any major movements that might indicate a breakout for immediate response. Implement GPS excursion monitoring.

ID	Project-specific risk control	Description
6.	Marking and Lighting	<p>Assets to be lit to the requirements of NLB and marked in line with IALA guidance, IALA Recommendation O-139 (2013)<sup>1</sup>. The following is typically requested by the NLB:</p> <ul style="list-style-type: none"> <li>• Yellow day marking/painting;</li> <li>• Flashing yellow special mark light (Category 1) (larger devices may require 2 lights at each end which are synchronised; light ranges should be at least 3 nautical miles);</li> <li>• Day top mark (if deemed necessary);</li> <li>• Radar reflector; and</li> <li>• AIS AtoN (mandatory for floating devices at EMEC).</li> </ul> <p>Appropriate statutory sanctions must be in place to exhibit, alter or discontinue lighting.</p>
8.	Tow risk assessment and passage plan	<p>As required under Orkney Harbours Pilotage Directions 4(3)<sup>2</sup>, prior to conducting a towing operation, a risk assessment and passage plan for the move should be conducted. The plan should account for the size of the tow, maneuverability restrictions, tow arrangements and metocean conditions.</p>
9.	Guard vessels	<p>During major construction or maintenance activities, a guard vessel may be considered to assist in protecting the devices from contacts with passing vessel traffic. Due to the low density of traffic, this is not considered necessary except for extraordinary circumstances.</p> <p>If guard vessels are to be used onsite, it is important that such vessels employed to guard the site follow appropriate guidelines, with clear instructions on when to intervene in a potential incident.</p>
10.	Liaison with local stakeholders	<p>Consultation should be undertaken with Orkney Marine Services, the MCA and NLB prior to installation of device to confirm that adequate risk controls are in place.</p> <p>EMEC also conducts regular stakeholder consultation events to ensure that local marine users are aware of the pipeline of activity.</p>

<sup>1</sup> All surface piercing structures should be marked as:

- Individual wave and tidal energy devices within a site that extend above the surface are painted yellow above the waterline;
- If marked, the individual devices should have flashing yellow lights. The flash character of such lights must be sufficiently different from those displaying on the boundary lights with a nominal range of not less than 2 nautical miles; and
- A single wave or tidal energy structure standing alone may be marked as either an isolated danger mark or a special mark.

It is also recommended that:

- Radar reflectors, retro-reflecting material, Racons and / or AIS transponders should be considered where the level of traffic and degree of risk requires it;
- The lit Aid to Navigation (AtoN) must be visible to the mariner from all relevant directions in the horizontal plane, by day and night;
- Any floating AtoNs should be located outside the moorings of the floating structures; and
- AtoNs should comply with IALA Recommendations and have an appropriate availability, normally not less than 99% (IALA Category 2).

<sup>2</sup> Orkney Islands Council Competent Harbour Authority (2016) The Orkney Pilotage Direction 1988 (as amended 2007, 2010 and 2016).

---

ID	Project-specific risk control	Description
11.	Installation, maintenance and removal	All vessels undertaking activities on site should comply with EMEC standard operating procedures. Vessels should be mindful of other navigating vessels and avoid disrupting the activities of others.
12.	ERCoP	Project-specific annex to be incorporated into site-wide ERCoP.

## 5 Summary and conclusion

This document has been prepared to support a marine licence application for the Mocean M100P and should be read in conjunction with the document 'Scapa Flow Scale Wave Site Navigational Risk Assessment (NRA) – REP299'.

In summary, the NRA has concluded that the deployment of the device is low risk with suitable risk controls in place. This conclusion has been emphasised by the scale of this deployment and short testing period.

# Appendix A: Proposed Schedule

Table 5. Project Programme

Month	October - 2020				November - 2020				December - 2020				January - 2021				February - 2021				March - 2021				April - 2021							
Week Commencing	05 Oct	12 Oct	19 Oct	26 Oct	02 Nov	09 Nov	16 Nov	23 Nov	30 Nov	07 Dec	14 Dec	21 Dec	28 Dec	04 Jan	11 Jan	18 Jan	25 Jan	01 Feb	08 Feb	15 Feb	22 Feb	01 Mar	08 Mar	15 Mar	22 Mar	29 Mar	05 Apr	12 Apr	19 Apr	26 Apr		
<b>Scenarios</b>																																
Scenario 1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Contingency															
Scenario 2					1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Contingency											
Scenario 3									1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Contingency							
Scenario 4													1	2	3	4	5	6	7	8	9	10	11	12	Contingency							
<b>Consent Period</b>	[Green shaded area]																															

The scenario is dependent on the final impact Covid-19 will have on the project timeline. If everything goes to plan from the point of this application then Scenario 1 will be the most likely, however, to accommodate Scenario 4 the marine licence should extend until 30<sup>th</sup> April 2021. EMEC will update Marine Scotland on the situation as it becomes clearer which scenario is most likely, as this may change throughout or after the determination process. Given current circumstances, the most ‘common-sense’ approach should be to consent for the worst-case scenario (Scenario 4) while providing updates to Marine Scotland on which scenario is more likely as future circumstances become clearer.